


Working load according to EN 13155/WLL	
Load capacity on flat material:	450kg
Load capacity Ø50-270mm:	450kg
Max. load capacity > 20mm material thickness	

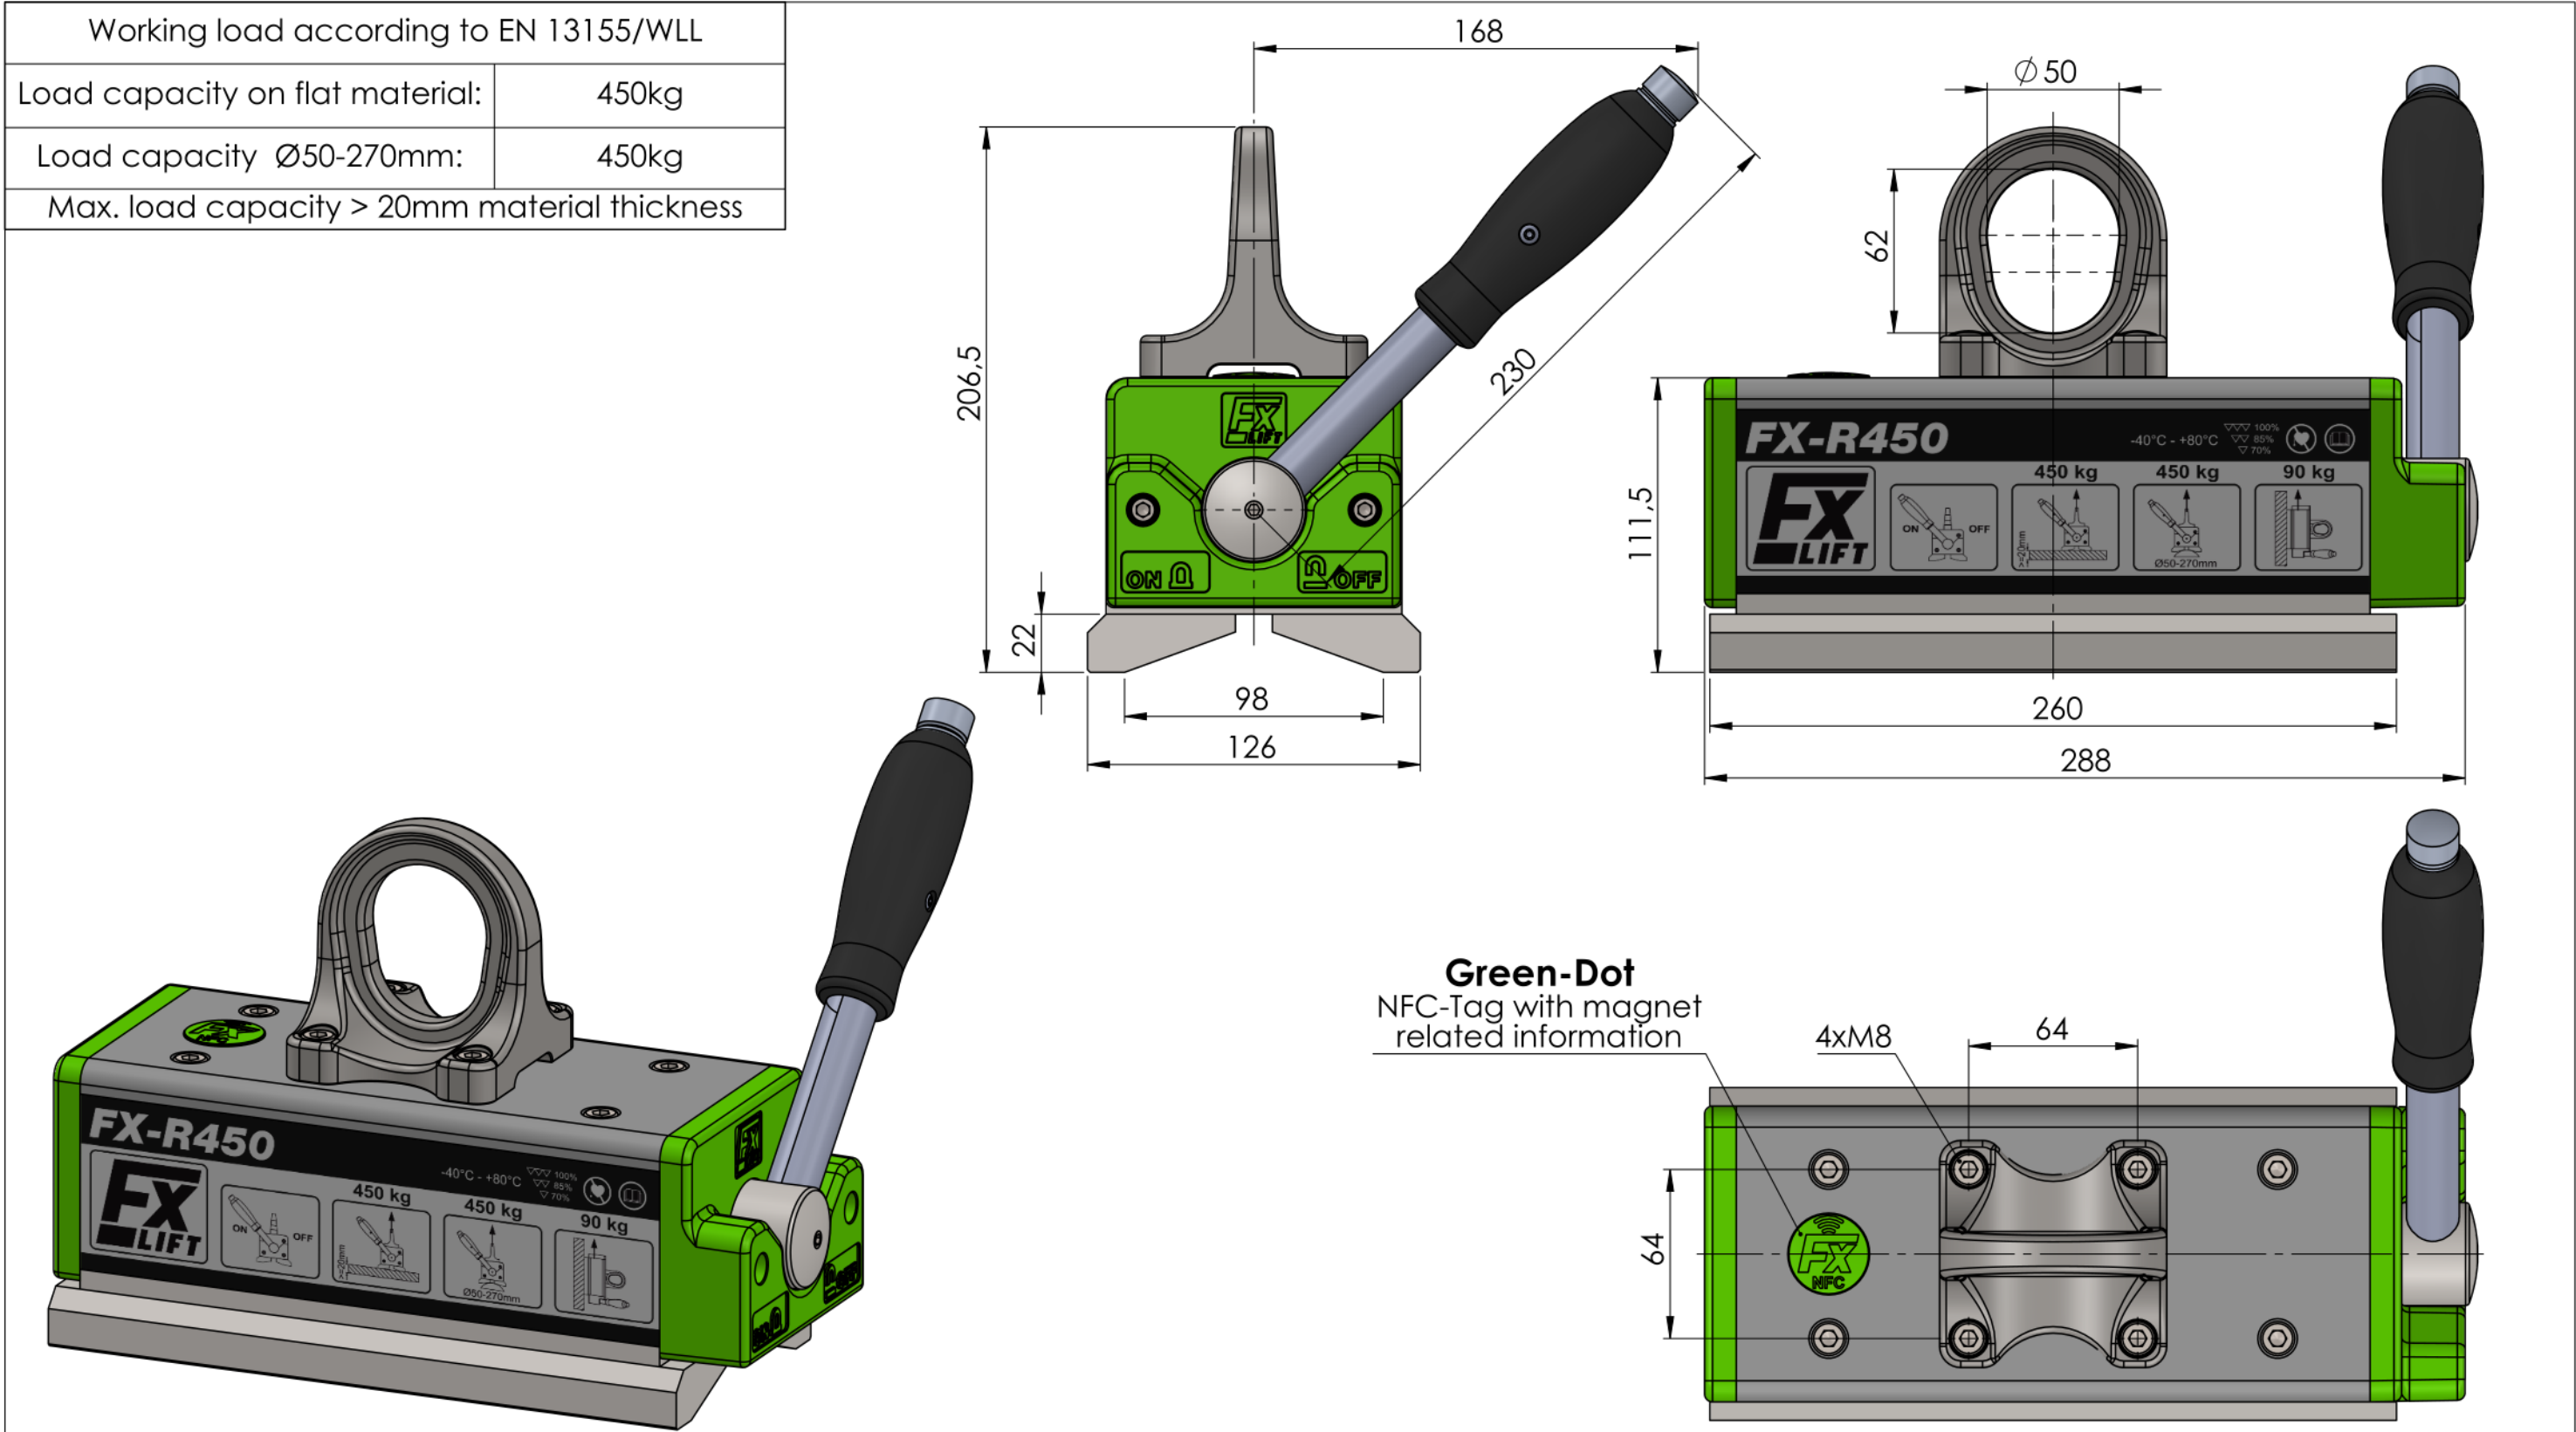

FX-R450	Air gap <0,2mm			Air gap 0,2-0,3mm			Air gap 0,3-0,6mm			Schutzvermerk nach DIN ISO 16016 beachten! Nachdruck nur mit unserer Genehmigung! All rights reserved according to DIN ISO 16016! Reprint with our permission only!				3,2 -0,05 -0,2		tolerance	material:	weight: 22.00	
Material Thickness (mm)	Max. Load (kg)	Max. L (mm)	Max. B (mm)	Max. Load (kg)	Max. L (mm)	Max. B (mm)	Max. Load (kg)	Max. L (mm)	Max. B (mm)						ISO 7168 M	drawing no.;	0014006		
>=6	150	1800	1500	120	1800	1000	100	1500	1250								description: FX-R450		
>=10	300	2250	1500	250	2250	1250	210	2000	1250										
>=15	400	2500	1500	350	2500	1250	300	2000	1250										
>=20	450	3000	1500	400	3000	1250	350	2500	1250										
Ø50-270	450	4000	-	375	3500	-	280	3000	-										
										03	Green Dot	18.01.2024	TW				part no.:		sheet
										02	Tabelle	14.12.2023	TW				11010451		1 / 1
										rev.	change	date	name				scale: 1:2.5		Status: Freigegeben