
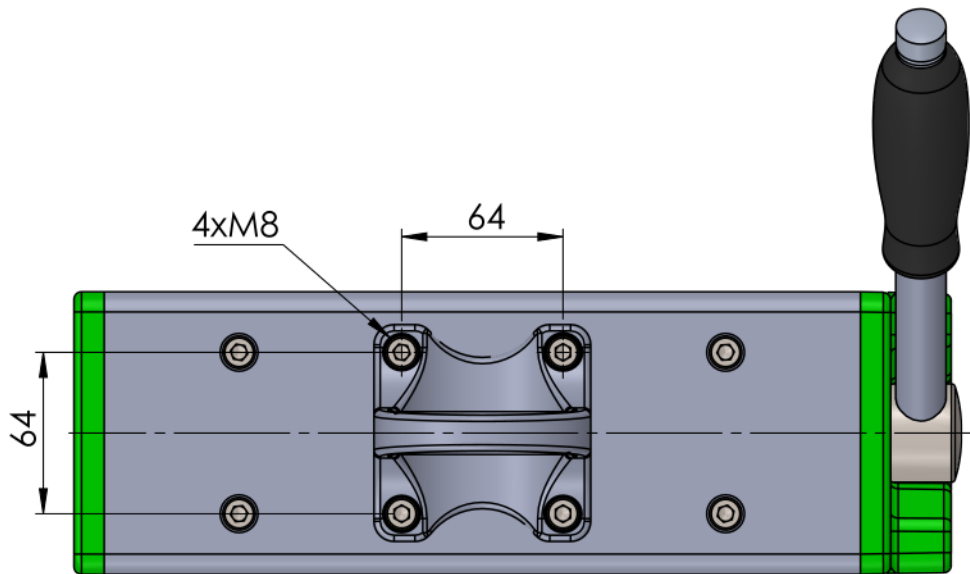
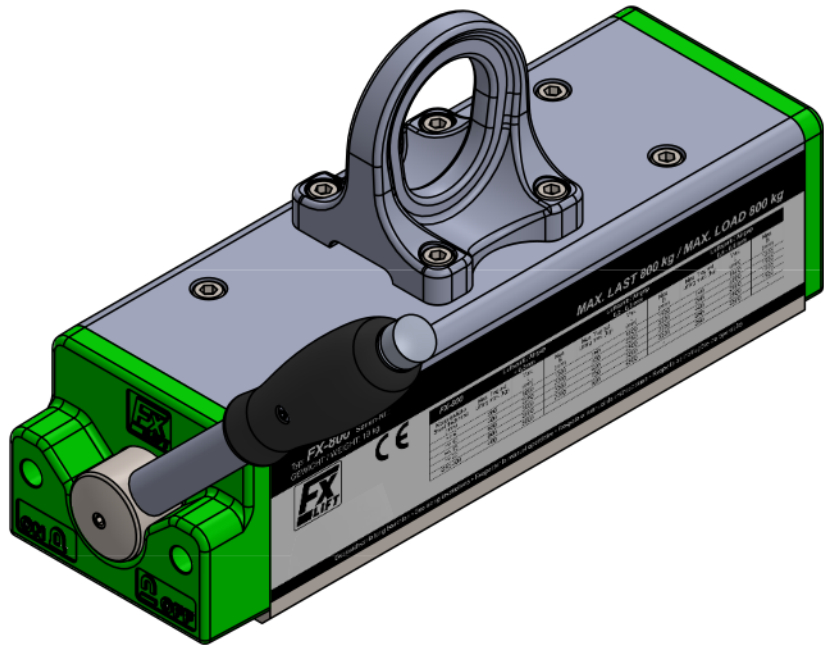
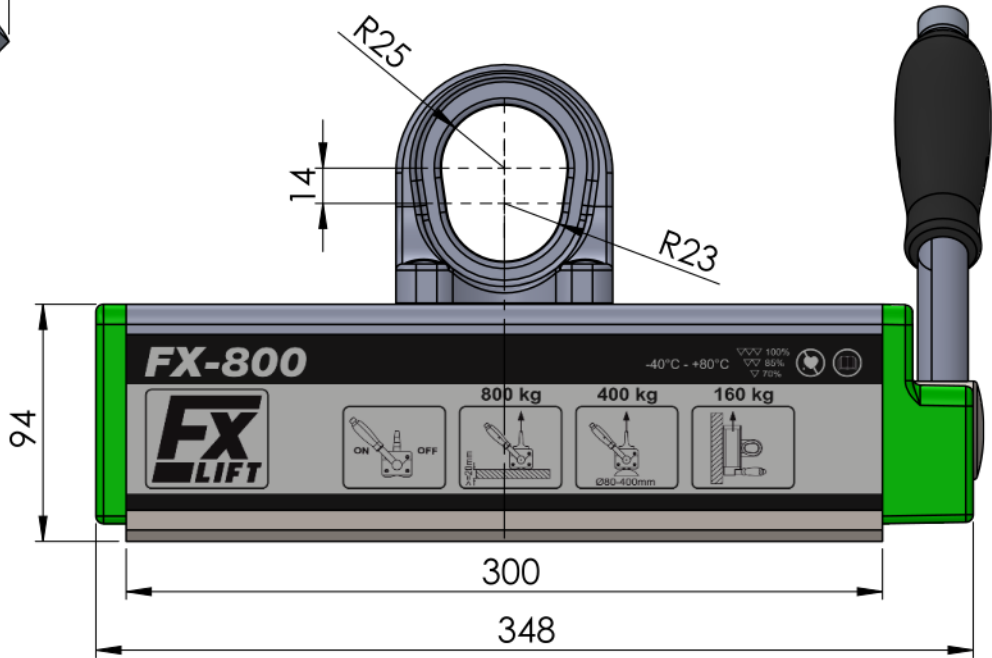


Working Load according to EN 13155	
load capacity on flat material:	800kg
load capacity Ø80-400:	400kg
Max. load capacity > 20mm material thickness	

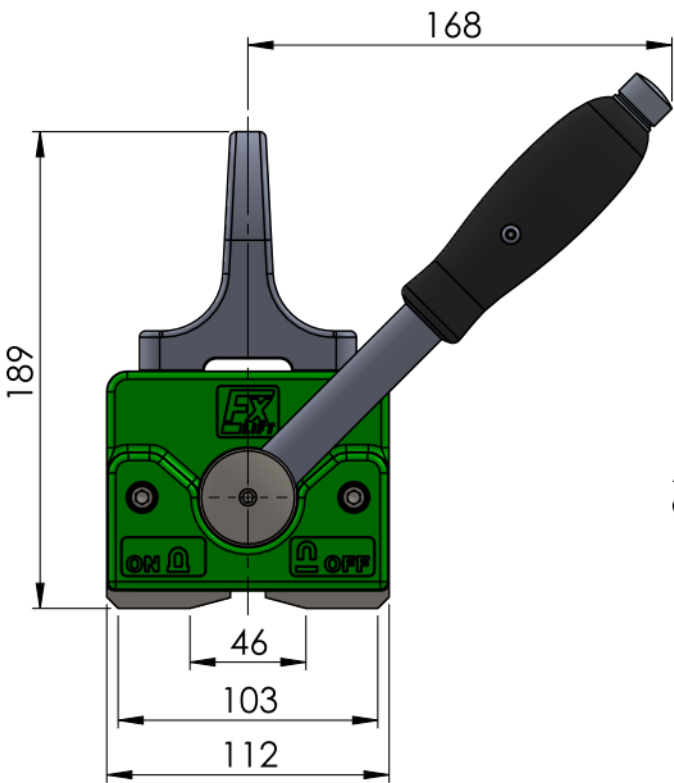

FX800	Air gap <0,2mm			Air gap 0,2- 0,3mm			Air gap 0,3- 0,6mm			Schutzvermerk nach DIN ISO 16016 beachten! Nachdruck nur mit unserer Genehmigung! All rights reserved according to DIN ISO 16016! Reprint with our permission only!				tolerance		material:	weight: 22.00
Material Thickness (mm)	Max. Load (kg)	Max. L (mm)	Max. B (mm)	Max. Load (kg)	Max. L (mm)	Max. B (mm)	Max. Load (kg)	Max. L (mm)	Max. B (mm)					ISO 7168 M		drawing no.;	
>=6	200	1800	1500	160	1800	1500	140	1500	1500					date	name	0019533	
>=10	400	2250	2000	320	2250	2000	280	2000	1500					drawn 09.11.2022	TW	description: FX 800	
>=15	650	2500	2000	520	2500	2000	450	2000	1500					edit 17.11.2022			
>=20	800	3000	2000	720	3000	2000	550	2500	1500					appr. 17.11.2022	TW		
Ø80-400	400	5000	-	320	4500	-	250	3500	-							part no.:	11010800
										rev.	change	date	name			scale: 1:3	Status: Freigegeben