
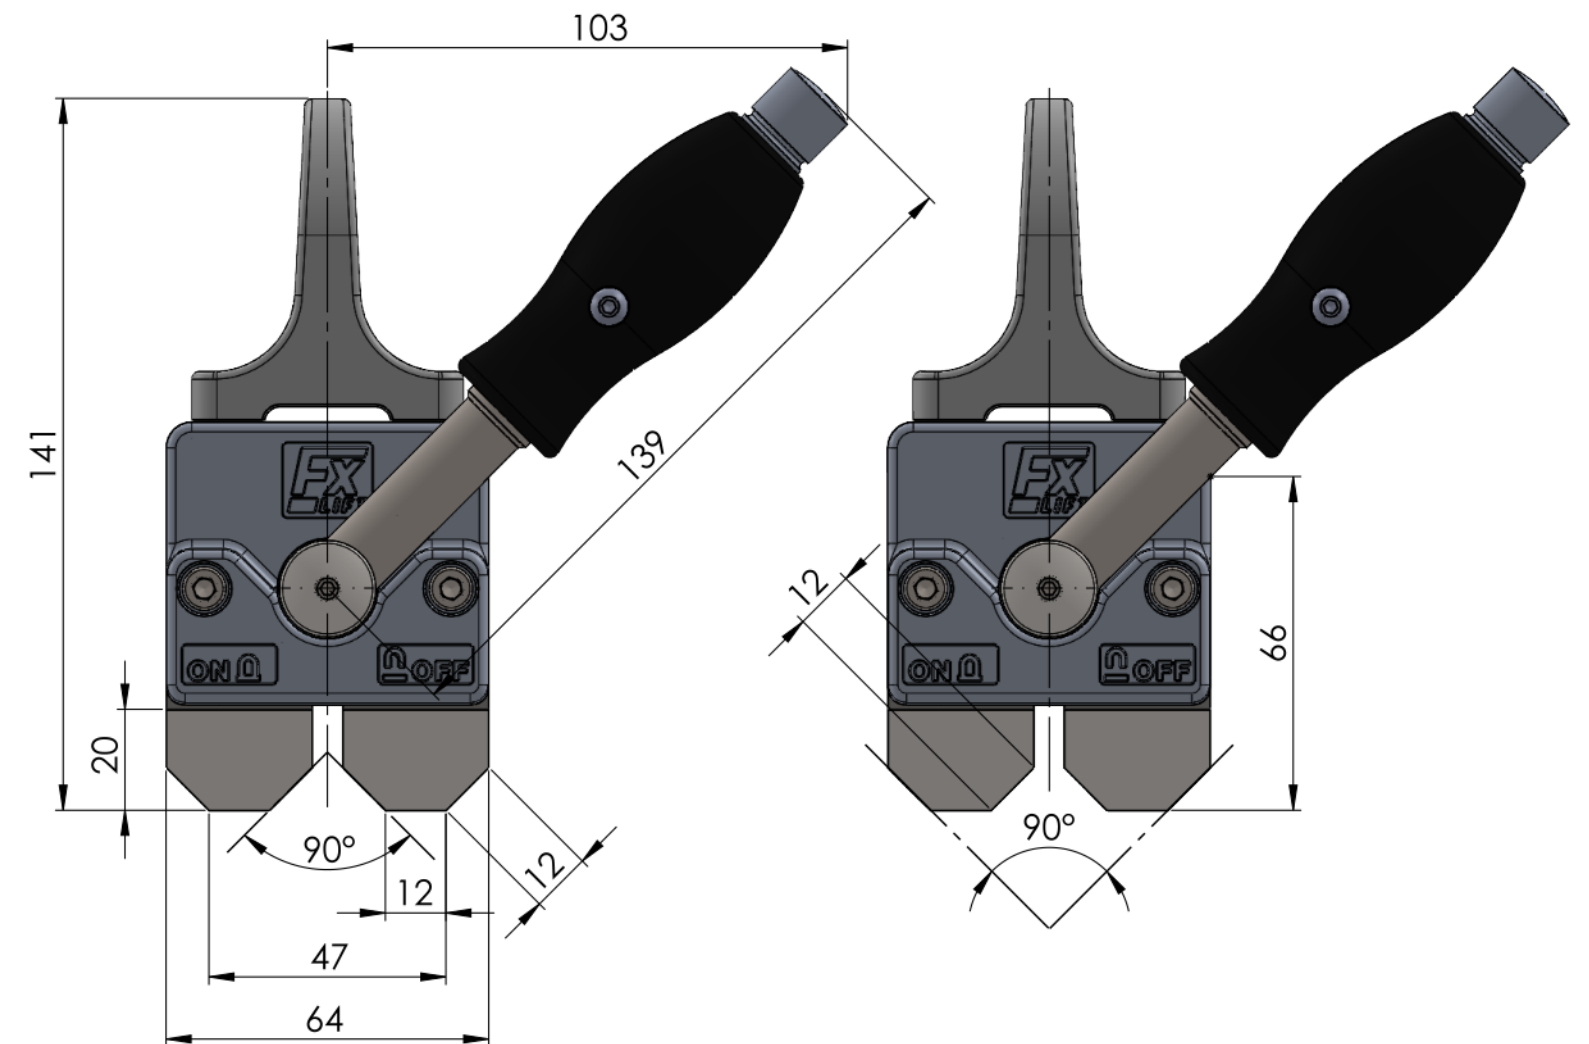
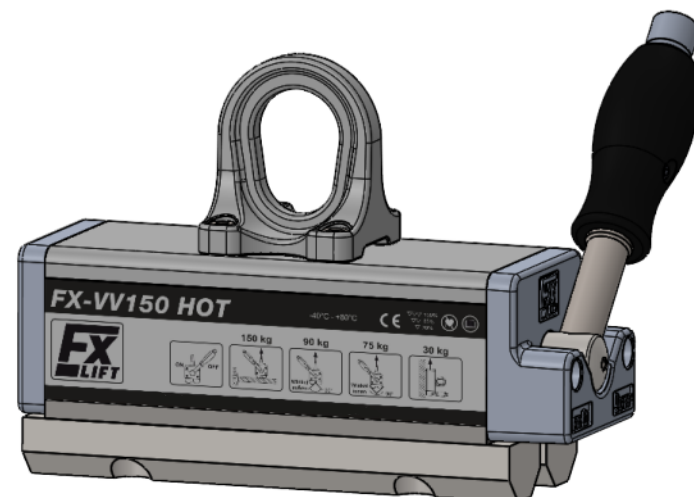
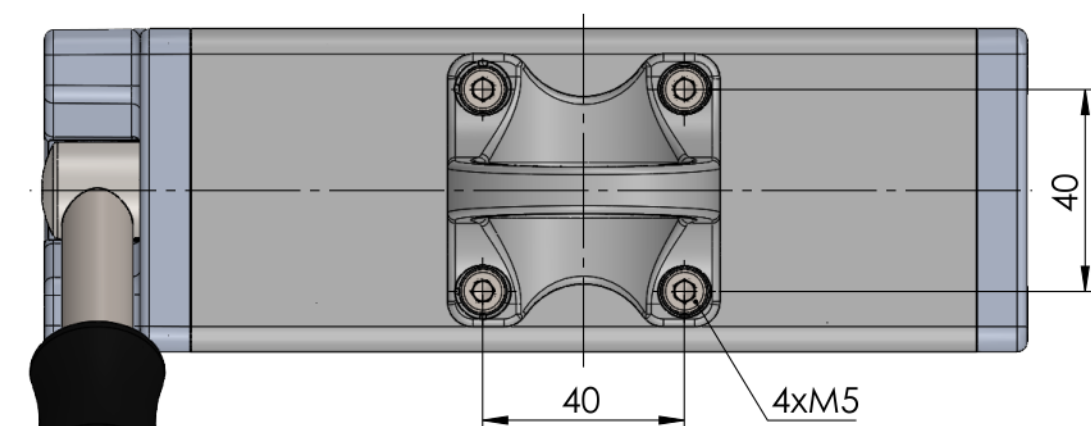


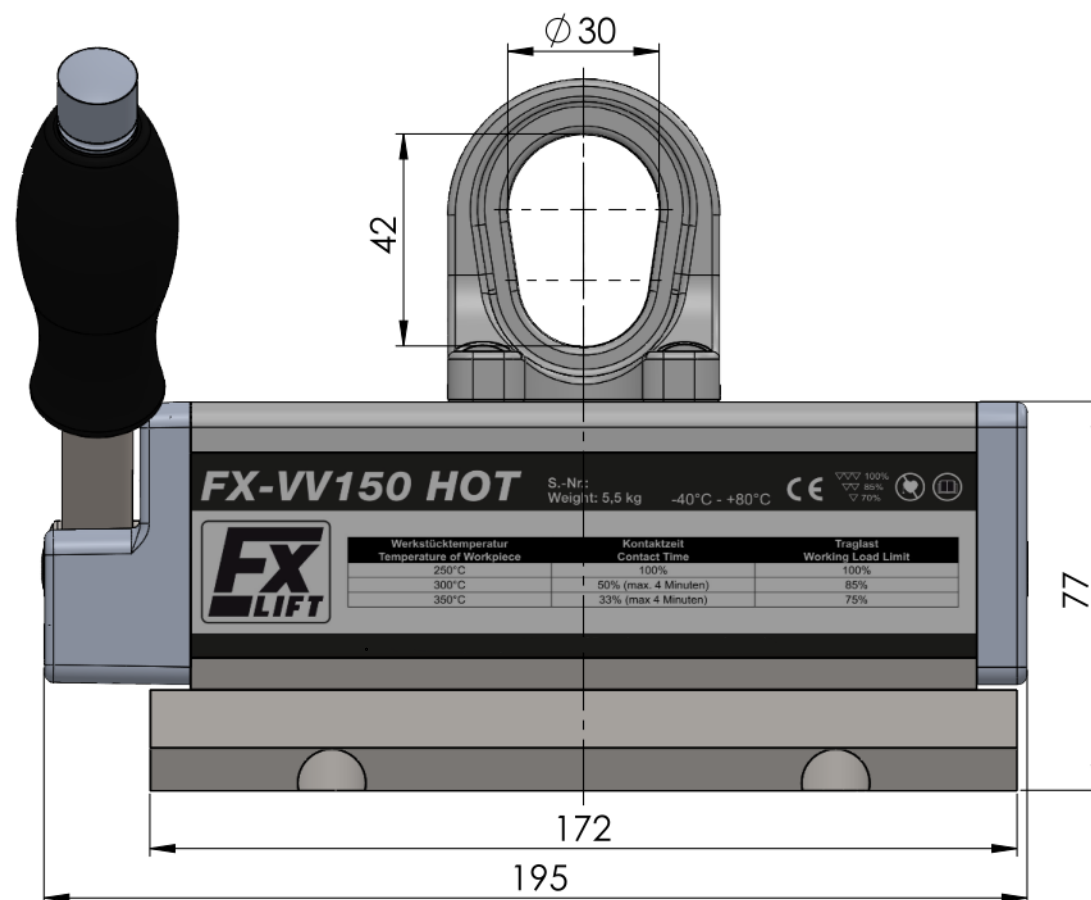

Load capacity according to EN 13155/WLL

Load capacity on flat material (from 10 mm material thickness): 150 kg

Load capacity on 90° profile outside/top: 90 kg

Load capacity on 90° profile inside/bottom: 75 kg

Workpiece temperature / contact time / load capacity:

-At 250°C 100% put on time / 100% load capacity

-At 300°C max. 50% put on time (contact time = cooling time, max. 4 minutes)
85% load capacity

-At 350°C max. 33% put on time (contact time = cooling time/2, max. 4 minutes)
75% load capacity

Schutzvermerk nach DIN ISO 16016 beachten! Nachdruck nur mit unserer Genehmigung! All rights reserved according to DIN ISO 16016! Reprint with our permission only!				3,2 -0,05 -0,2 tolerance		material:		weight: 5.50		
						ISO 7168 M		drawing no.;		
					date	name	description: FX-VV 150 HOT			
				drawn	27.07.2022	TW				
				edit	18.12.2023					
				appr.	18.12.2023	TW				
				VEGA TECHNIK			part no.:		sheet	
03	Überarbeitet	18.12.2023	TW				11010155-1		1 / 1	
02	Bemaßung hinzu	20.11.2023	TW						A3	
rev.	change	date	name			scale: 1:1.5	Status: Freigegeben			