
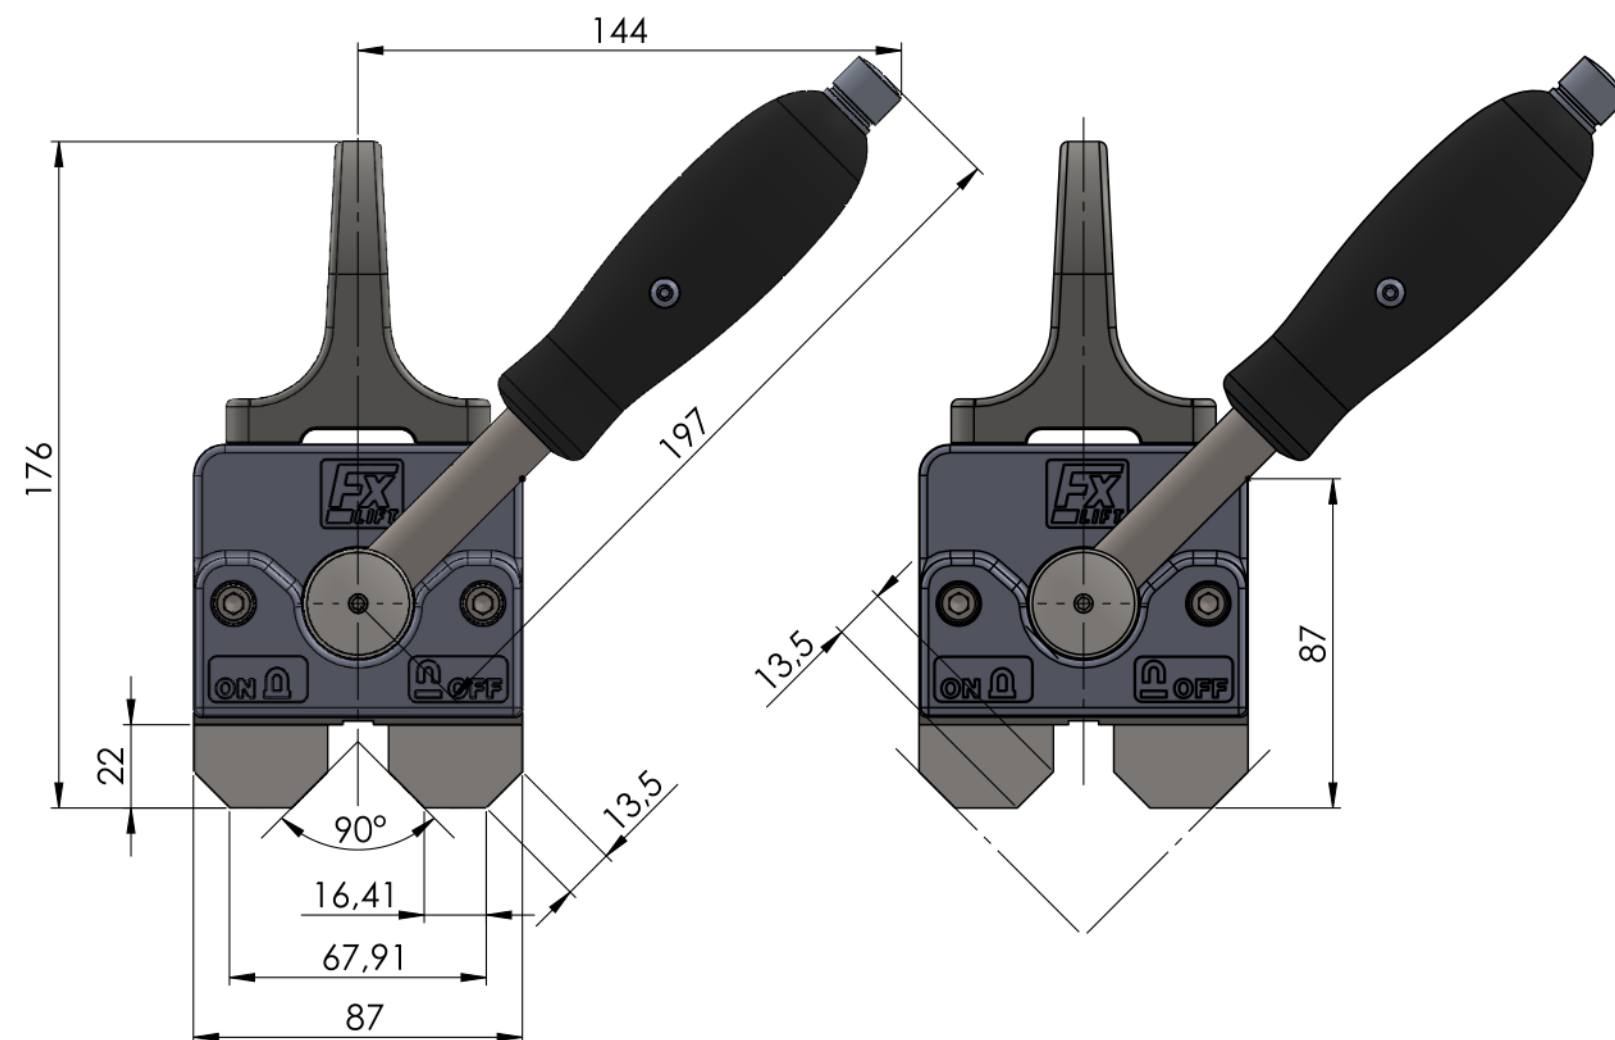
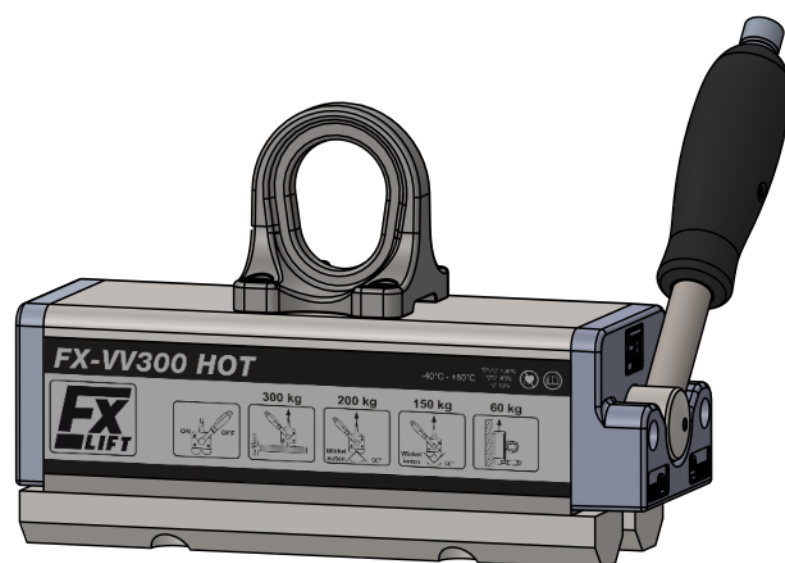
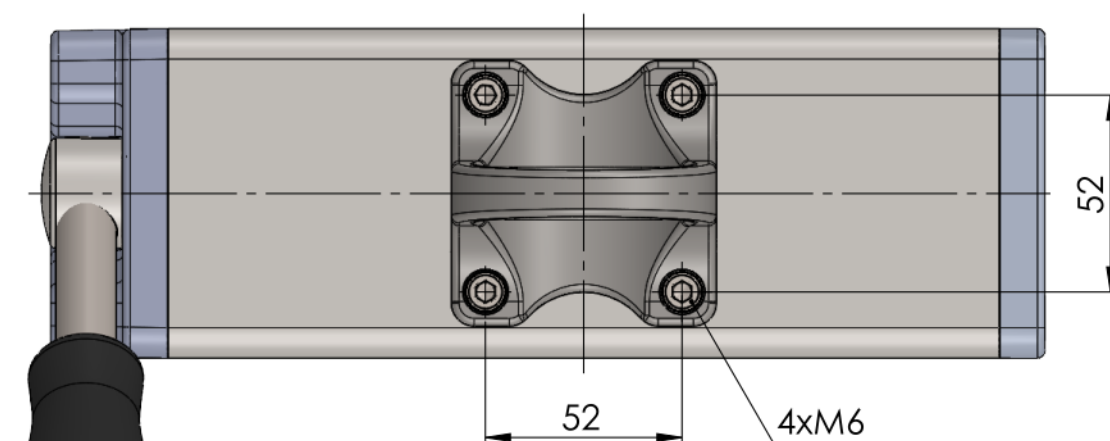


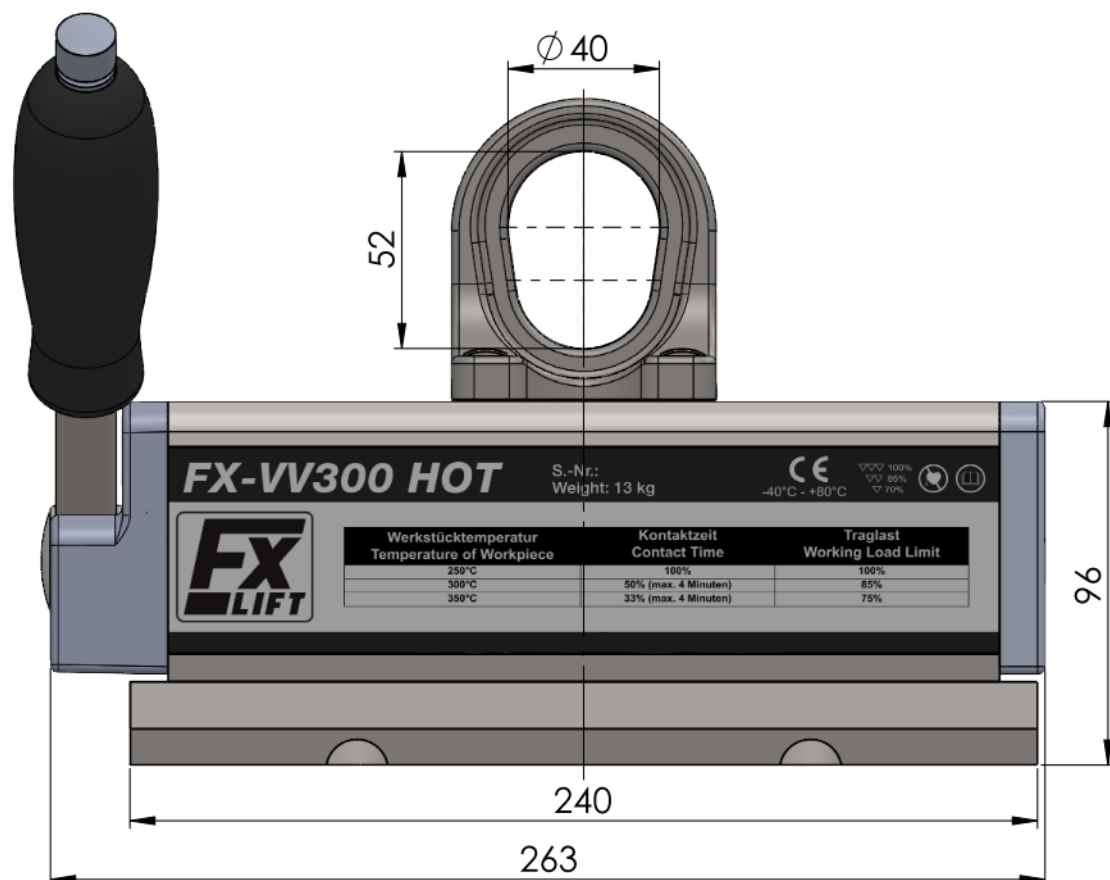

Load capacity according to EN 13155/WLL

Load capacity on flat material (from 15 mm material thickness): 300 kg

Load capacity on 90° profile outside/top: 180 kg

Load capacity on 90° profile inside/bottom: 150 kg

Workpiece temperature / contact time / load capacity:

-At 250°C 100% put on time / 100% load capacity.

-At 300°C max. 50% put on time (contact time = cooling time, max. 4 minutes)

85% load capacity

-At 350°C max. 33% put on time (contact time = cooling time/2, max. 4 minutes)

75% load capacity

Schutzvermerk nach DIN ISO 16016 beachten! Nachdruck nur mit unserer Genehmigung! All rights reserved according to DIN ISO 16016! Reprint with our permission only!				3,2 -0,05 -0,2		tolerance		material:		weight: 12.90	
						ISO 7168 M		drawing no.: 0018490			
					date	name	description: FX-VV 300 HOT				
				drawn	27.07.2022	TW					
				edit	18.12.2023						
				appr.	18.12.2023	TW					
				VEGATECHNIK			part no.:			sheet	
03	Überarbeitet	18.12.2023	TW				11010305-1			1 / 1	
02	Bemaßung hinzu	20.11.2023	TW							A3	
rev.	change	date	name				scale: 1:2		Status: Freigegeben		