
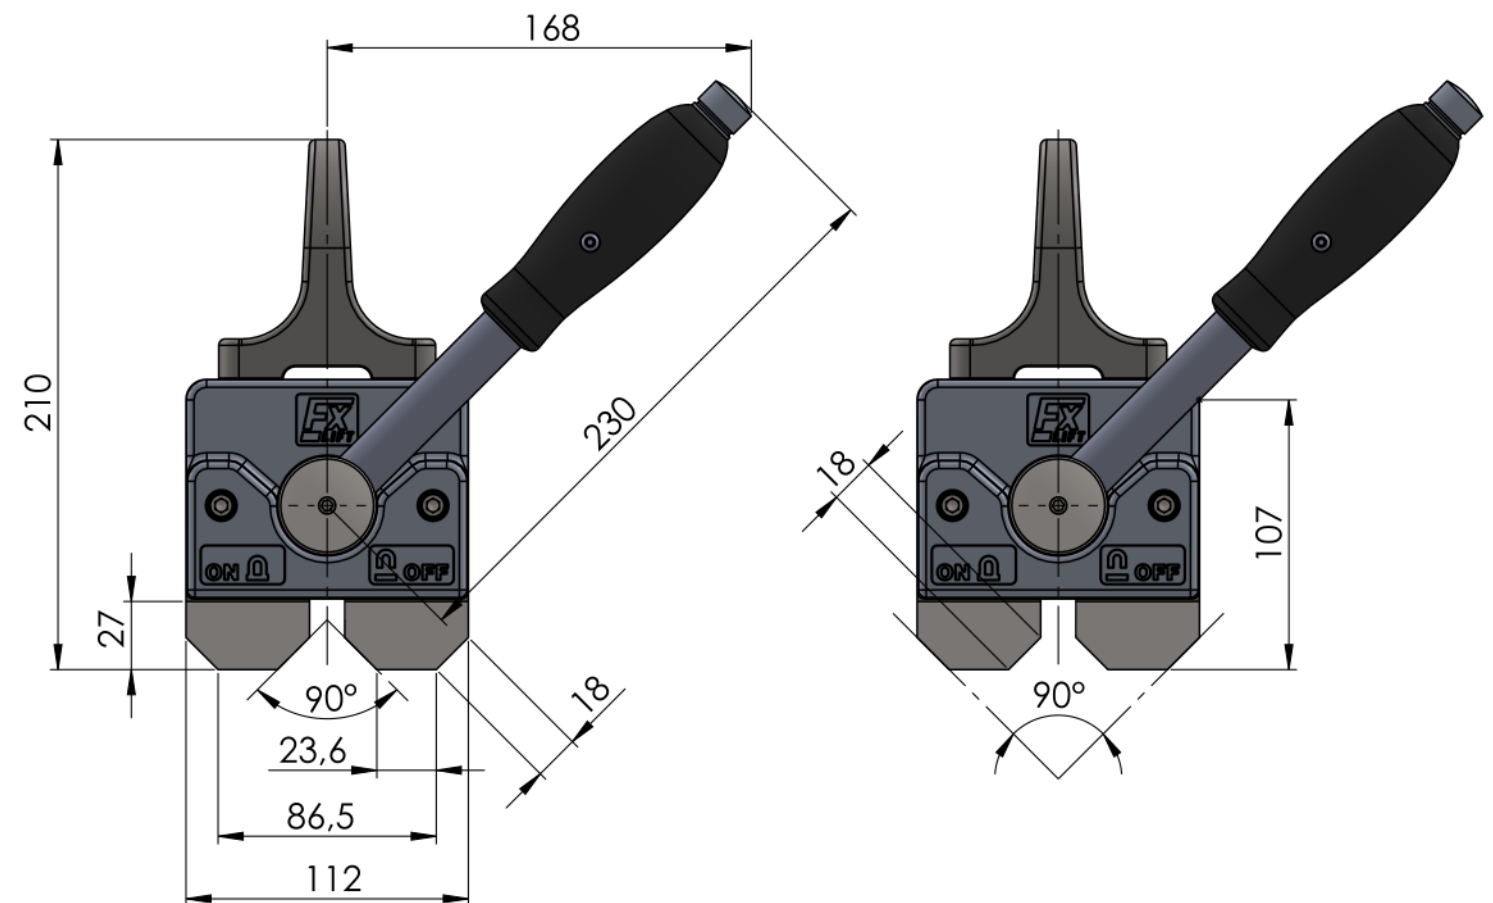
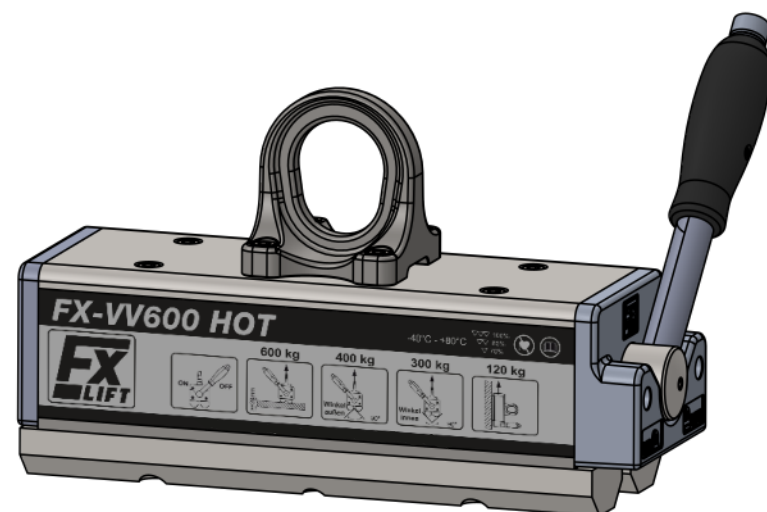
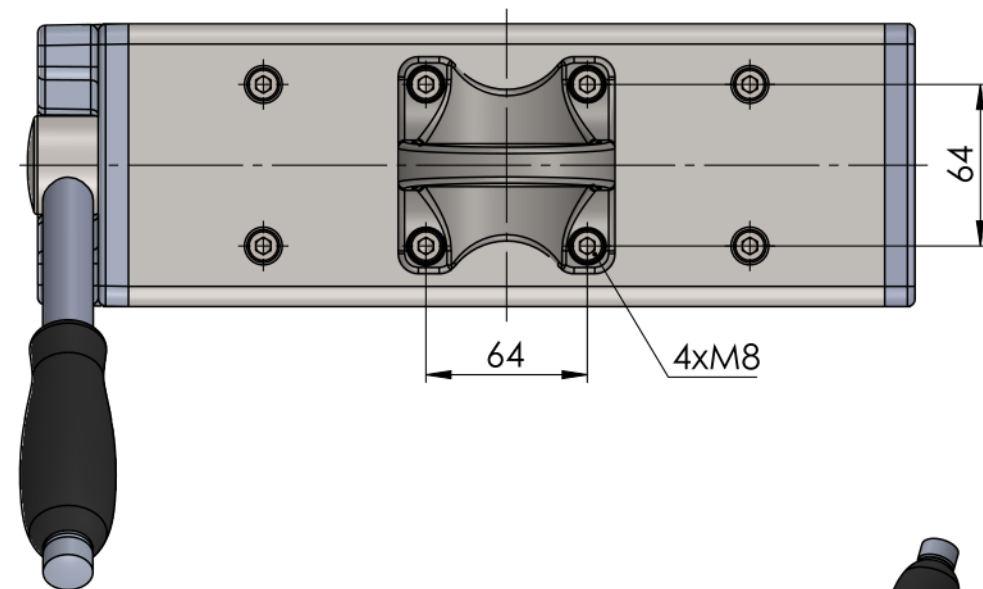


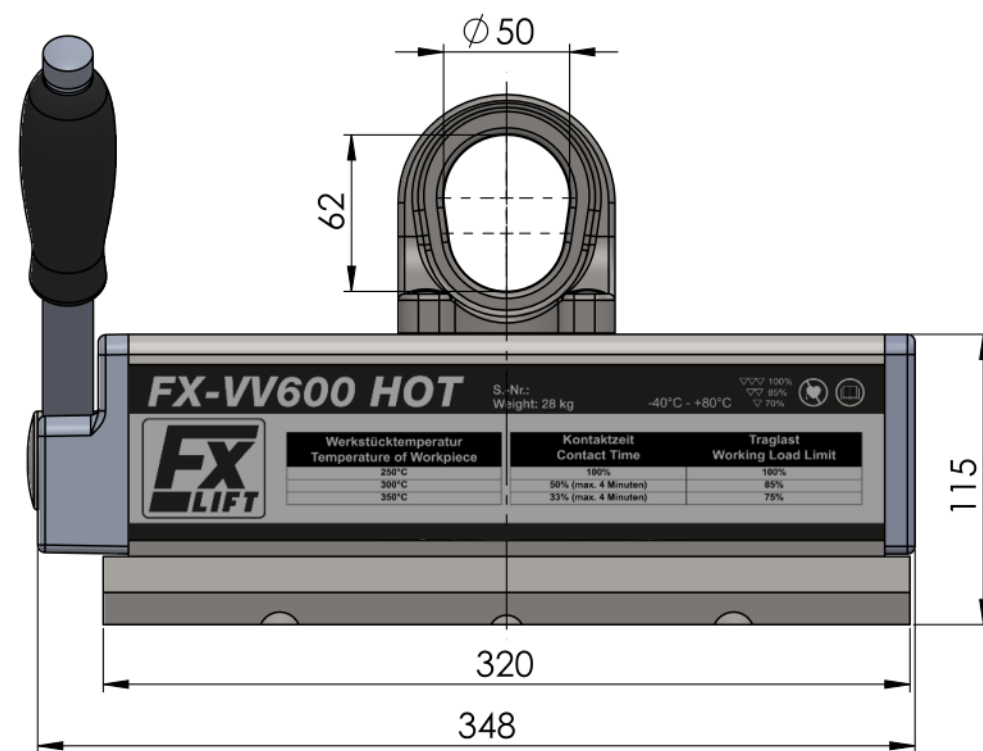

Load capacity according to EN 13155/WLL

Load capacity on flat material (from 20 mm material thickness): 600 kg

Load capacity on 90° profile outside/top: 360 kg

Load capacity on 90° profile inside/bottom: 300 kg

Workpiece temperature / contact time / load capacity:

-At 250°C 100% put on time / 100% load capacity.

-At 300°C max. 50% put on time (contact time = cooling time, max. 4 minutes)
85% load capacity

-At 350°C max. 33% put on time (contact time = cooling time/2, max. 4 minutes)
75% load capacity

Schutzvermerk nach DIN ISO 16016 beachten! Nachdruck nur mit unserer Genehmigung!				tolerance		material:	weight: 27.70
All rights reserved according to DIN ISO 16016! Reprint with our permission only!				ISO 7168 M		drawing no.;	0018491
				date	name	description: FX-VV 600 HOT	
				drawn	TW		
				edit	18.12.2023		
				appr.	18.12.2023	part no.:	
				VEGA  TECHNIK		11010605-1	
03	Überarbeitet	18.12.2023	TW			sheet 1 / 1	
02	Bemaßung hinzu	20.11.2023	TW				
rev.	change	date	name			scale: 1:3	Status: Freigegeben