

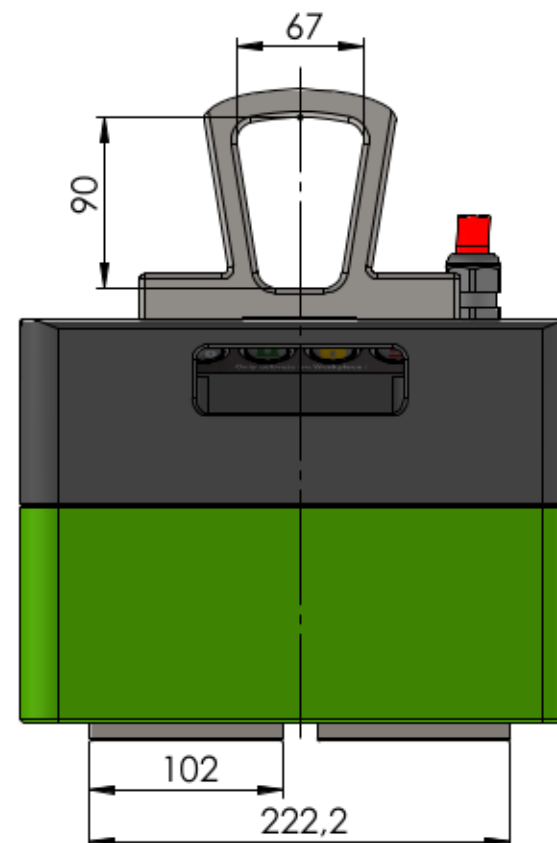
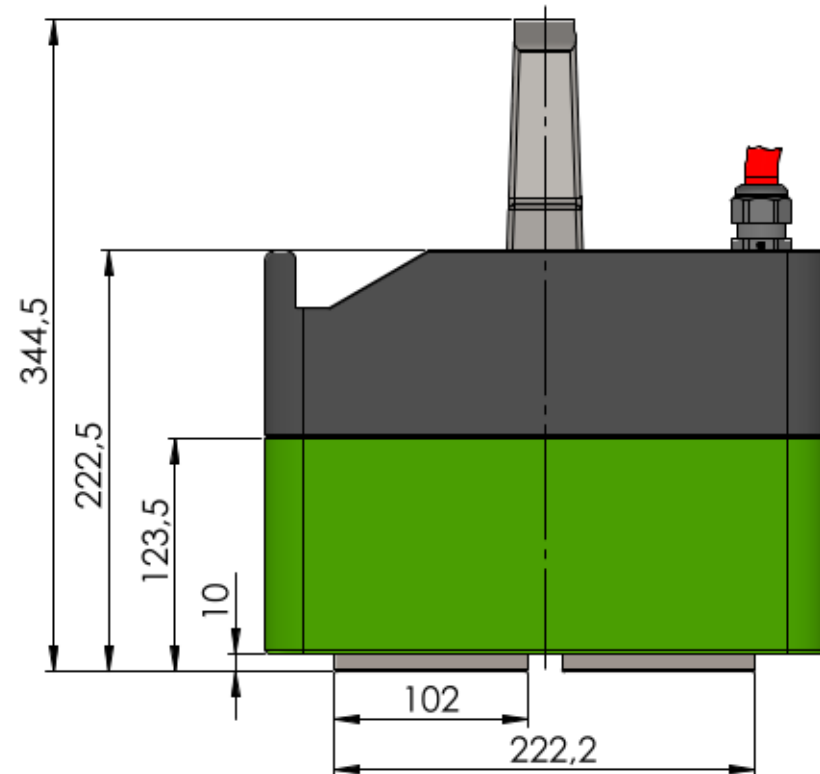
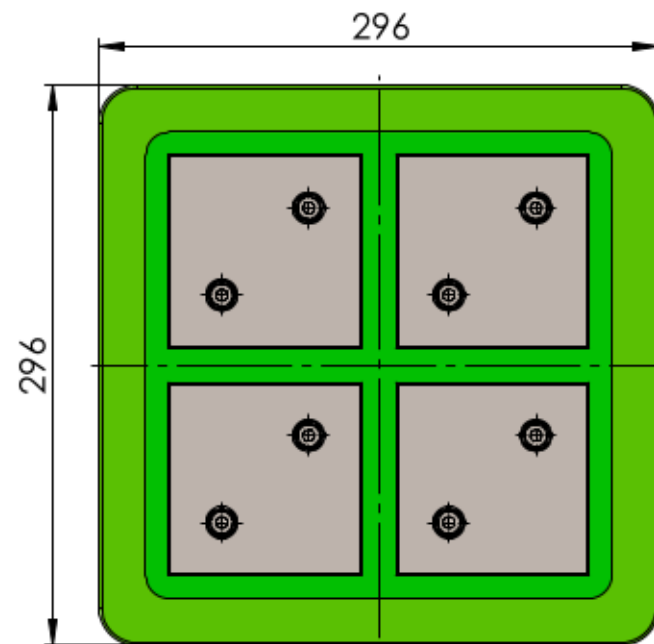
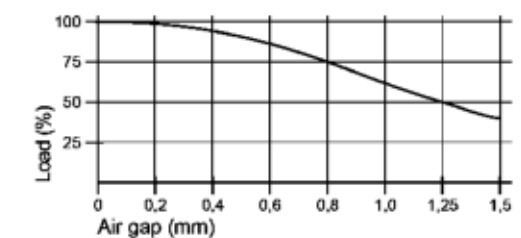


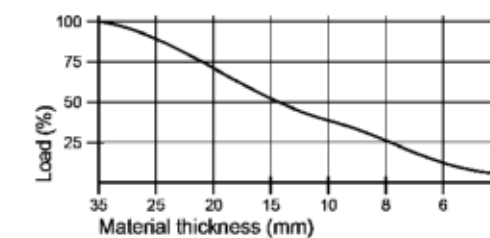

Front board control panel
Pick-Up/Full-Mag/Safe/De-Mag


2m Cable,
optional Spiral cable 1-5m

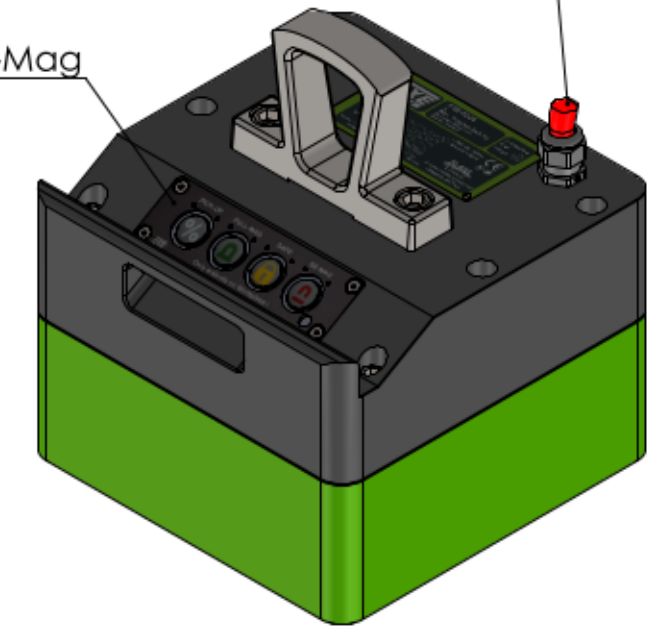

Specification FXE 1600-100

Nominative Force: 58kN	lifting capacity EN 13155/WLL		
Materialthickness >35mm (100%)	1600kg		
10,8kVA			
U: 380-480V Pulse	Protection Class IP 65		
R: 2,5Ω	Protectiv Earth SK I		
Max. Load capacity at sheets and 4-edge pipes			
T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=10mm	2000	1500	400
>=20mm	2000	1500	1000
>=35mm	3000	2000	1600

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!
All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO 7168 M

material:	weight: 82.00
drawing no.:	0018101
description:	FXE 1600-100
part no.:	10601603
scale: 1:4	Status: Freigegeben

VEGA  TECHNIK

02	Tabellenwerte	19.10.2023	TW
rev.	change	date	name