

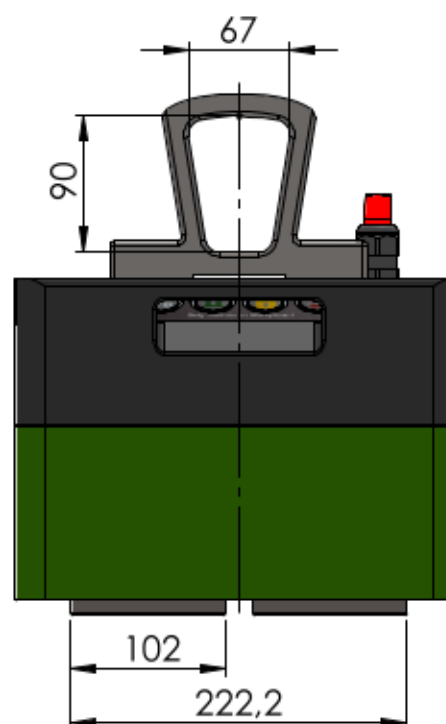
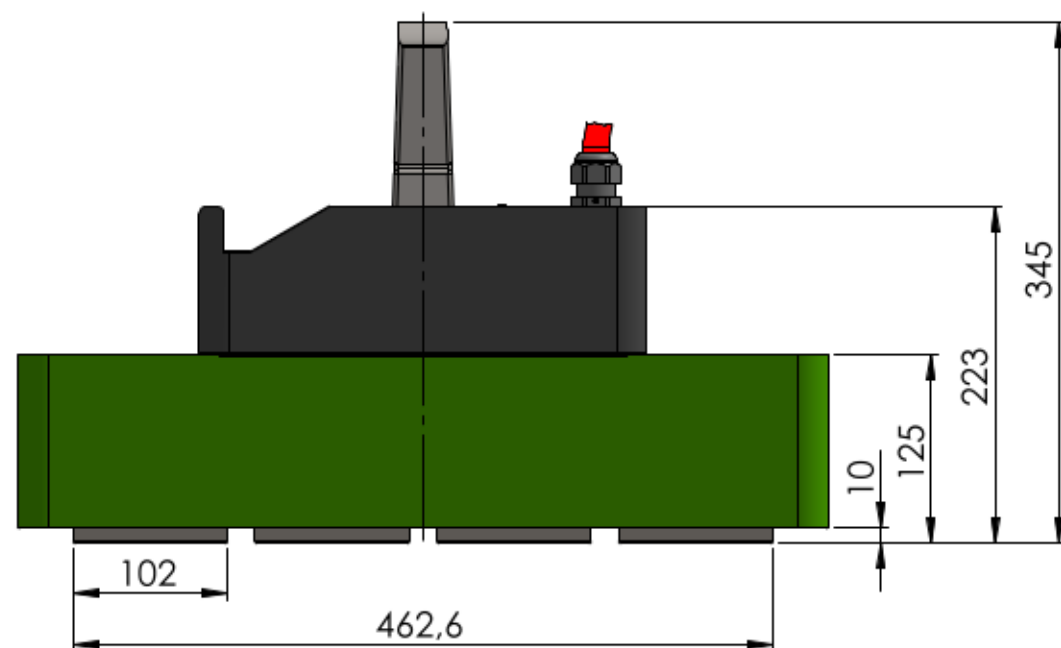
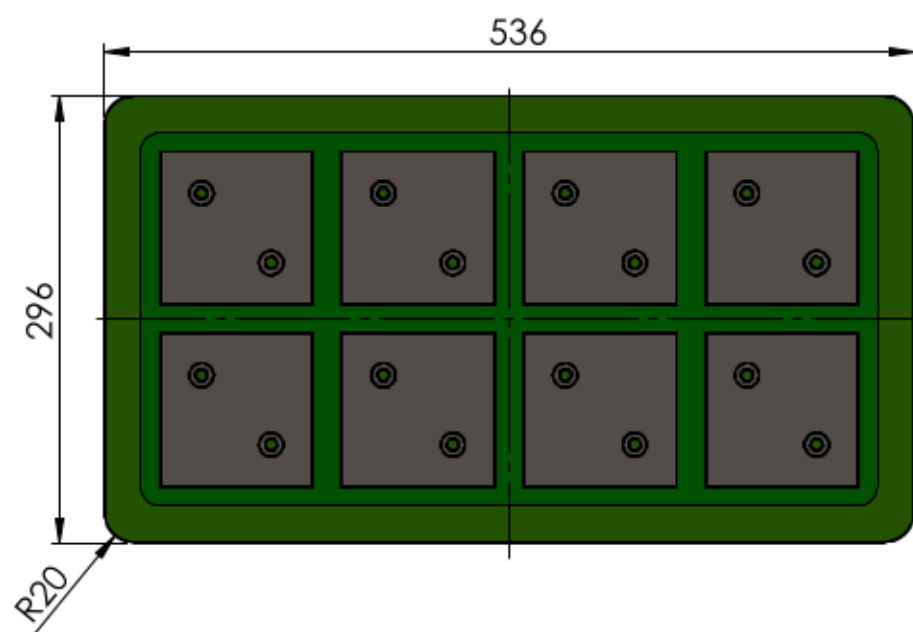
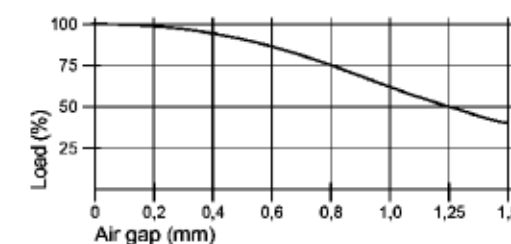


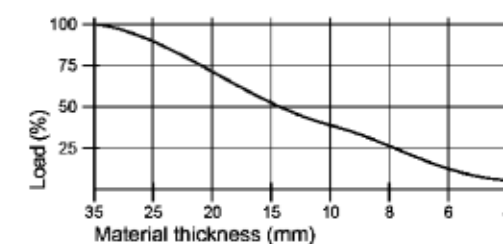

Front board control panel
Pick-Up/Full-Mag/Safe/De-Mag


2m cable,
optional Spiral cable 1-5m

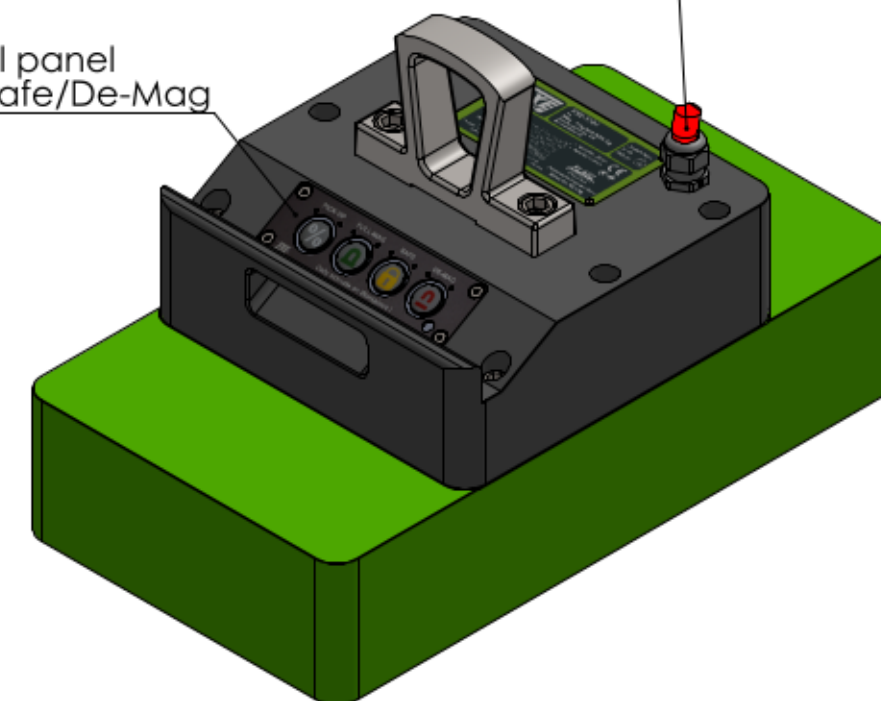

Specification FXE 3200-100

Nominative Force: 116kN	lifting capacity EN 13155/WLL		
Materialthickness >35mm (100%)	WLL= 3200kg		
10,8kVA			
U: 380-480V Pulse	Protection type IP 65		
R: 2 x 2,5Ω	Protection category SK I		
Max. Load capacity at sheets and 4-edge pipes			
T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=10mm	3000	2000	800
>=20mm	3000	2000	2200
>=35mm	4000	2000	3200

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!
All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO
7168 M

material:	weight: 145kg
drawing no.:	0018550
description:	FXE 3200-100
part no.:	10603203
scale: 1:5	Status: Freigegeben

date	name
drawn 08.08.2023	TW
edit 27.10.2023	
appr. 19.10.2023	TW

VEGA  TECHNIK

rev.	change	date	name
04	Tabellenwerte	19.10.2023	TW
03	Ohm Wert	18.09.2023	TW
02	Tabellenwerte	16.08.2023	TW