

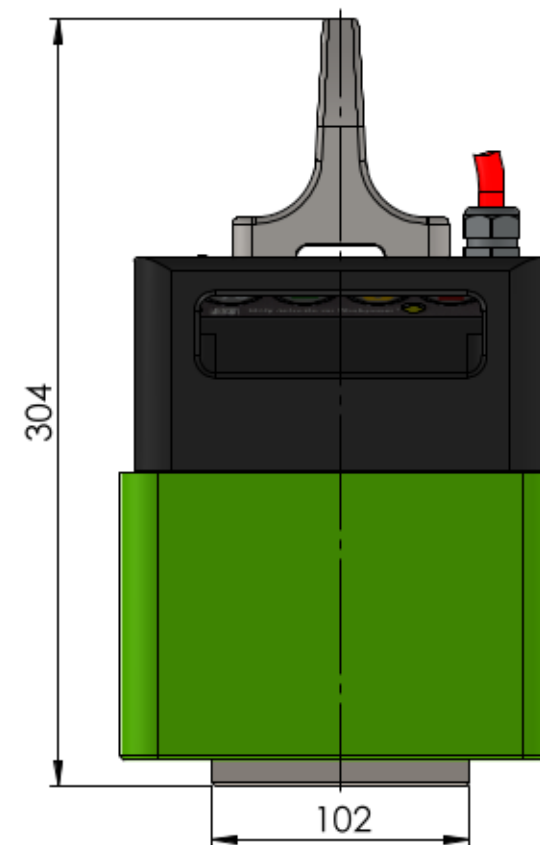
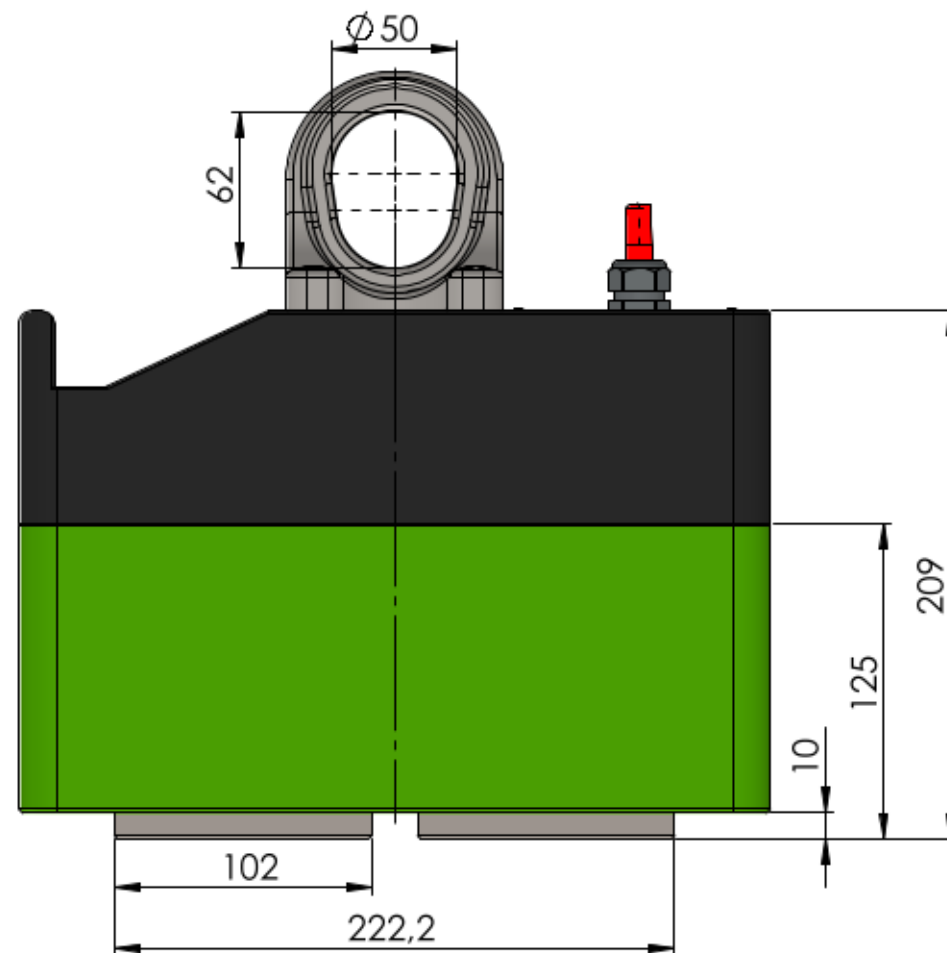
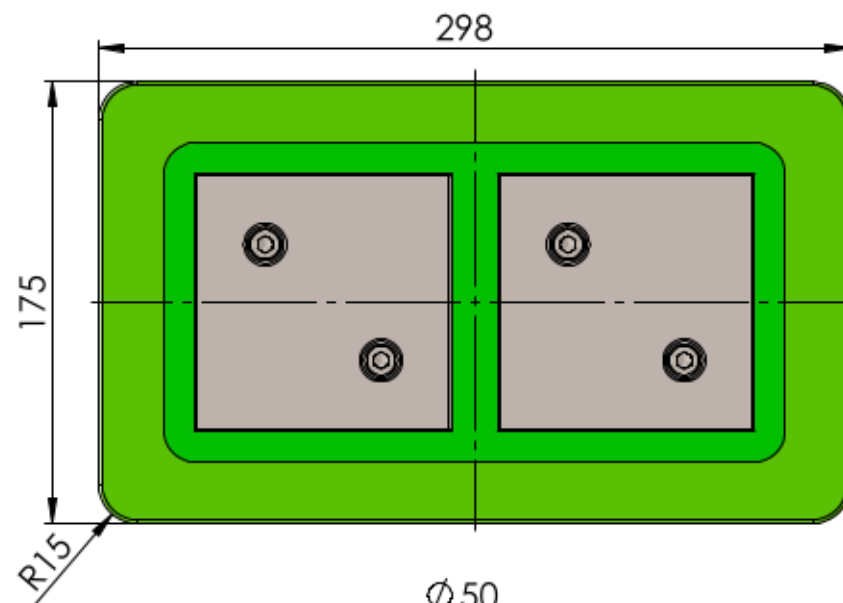
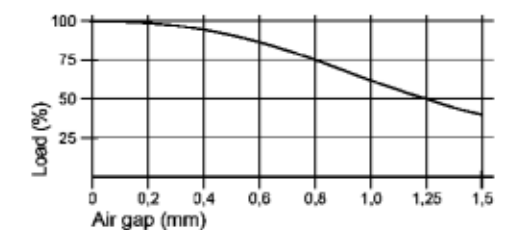


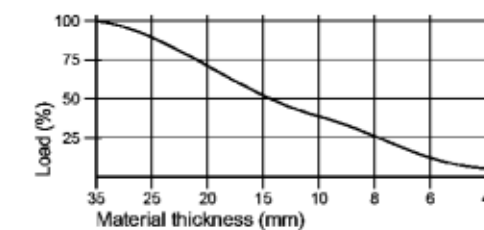

2m cable,
optional Spiral cable 1-5m


Front board control panel
Pick-Up/Full-Mag/Safe/De-Mag

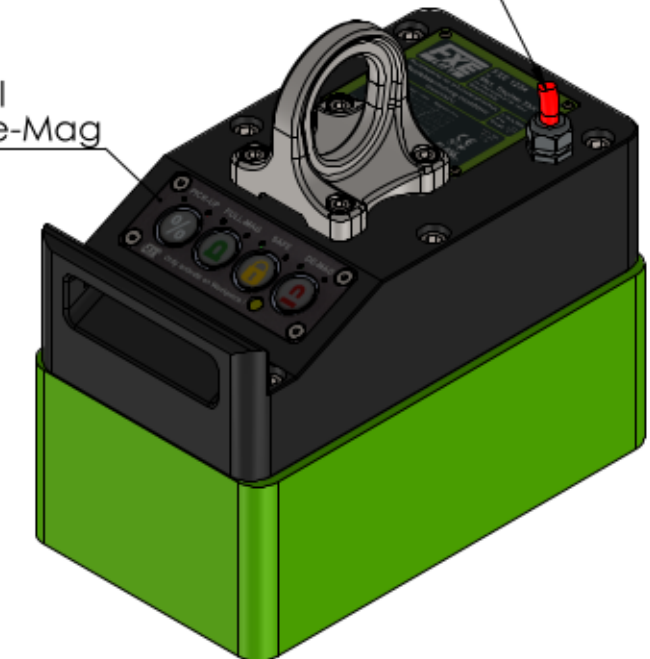

Specification FXE 800-100

Nominative Force: 29kN		lifting capacity EN 13155/WLL	
Materialthickness >35mm (100%)		WLL= 800kg	
5,7 kVA			
U: 380-480V Pulse		Protection Class IP 65	
R: 4,7Ω		Protectiv Earth SK I	
Max. Load capacity at sheets and 4-edge pipes			
T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=35mm	2000	1000	800

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!
All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO
7168 M

material: weight: 52kg

drawing no.: 0018529

description: **FXE 800-100**

part no.: 10600803 sheet 1 / 1 A3

scale: 1:3 Status: Freigegeben

VEGA TECHNIK

rev. change date name