

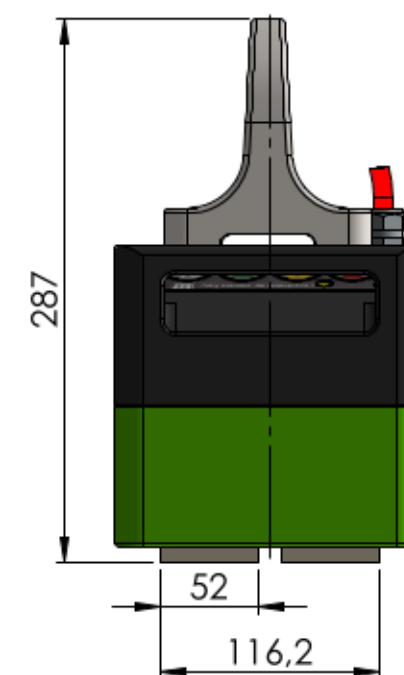
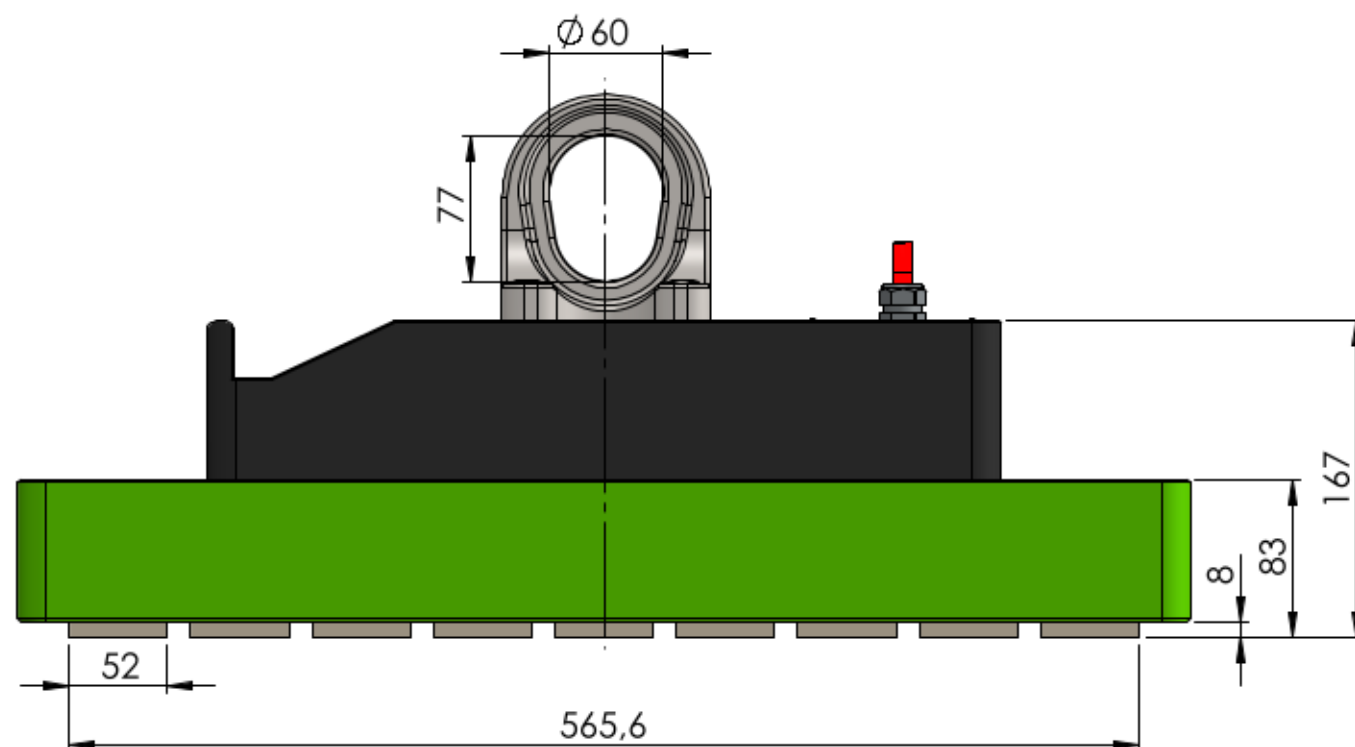


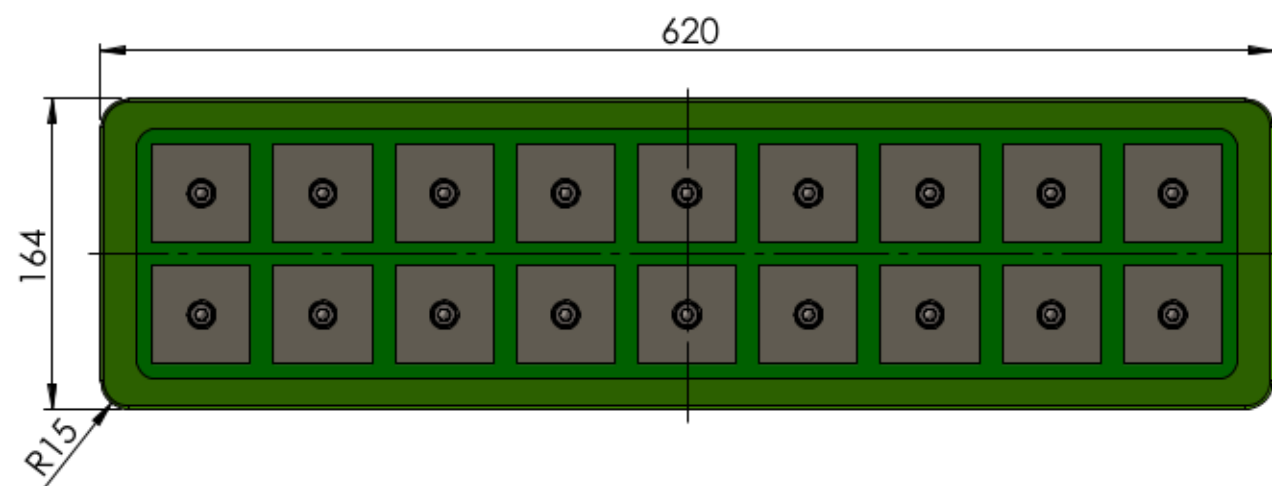



2m cable,
optional Spiral cable 1-5m

Front board control panel
Pick-Up/Full-Mag/Safe/De-Mag

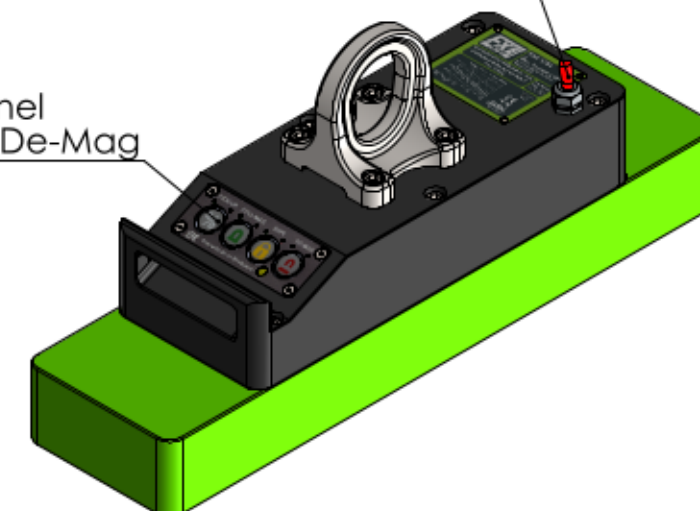


Specification FXE 1600-50+

Nominative Force: 68,4kN	lifting capacity EN 13155/WLL		
Materialthickness >15mm (100%)	WLL= 1600kg		
10,4 kVA			
U: 380-480V Pulse	Protection Class IP 65		
R: 2,6Ω	Protectiv Earth SK I		
Max. Load capacity at sheets and 4-edge pipes			
T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=4mm	3000	1500	300
>=6mm	3000	1500	500
>=8mm	3000	1500	800
>=10mm	3000	1500	1400
>=15mm	3000	2000	1600

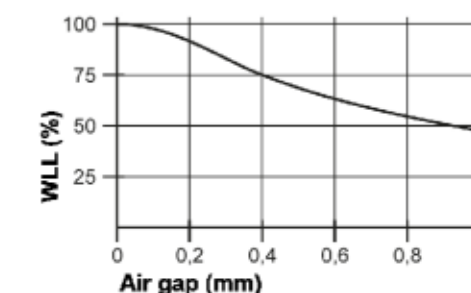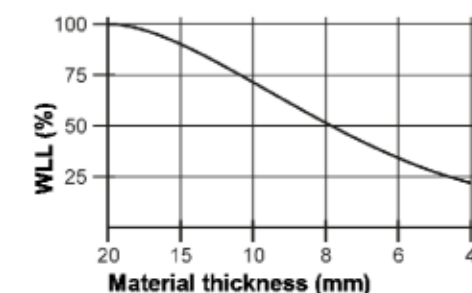

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!

All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO
7168 M

material: weight: 60
drawing no.: 0018540

date name
drawn 25.09.2023 TW
appr. 20.10.2023 TW

description: **FXE 1600-50+**

VEGA TECHNIK

part no.: 10601611 sheet 1 / 1
A3

02 Tabellenwerte 20.10.2023 TW
rev. change date name

scale: 1:4 Status: Freigegeben