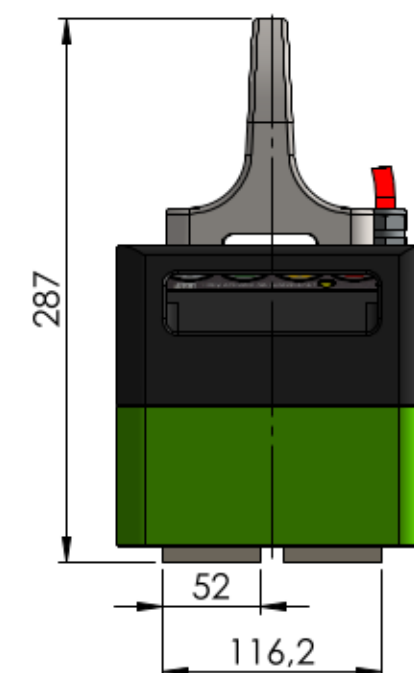
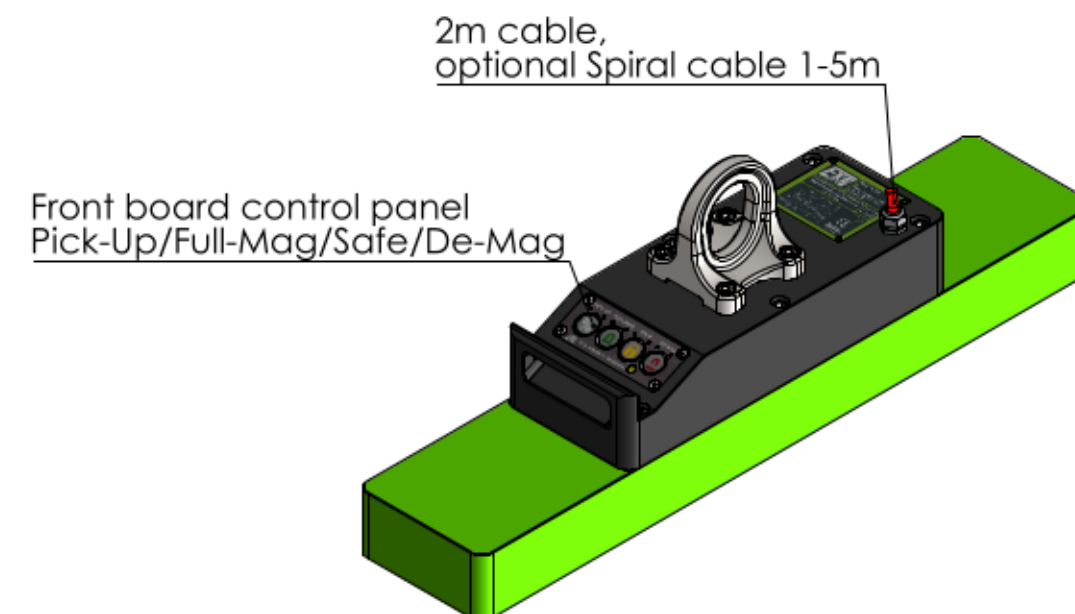
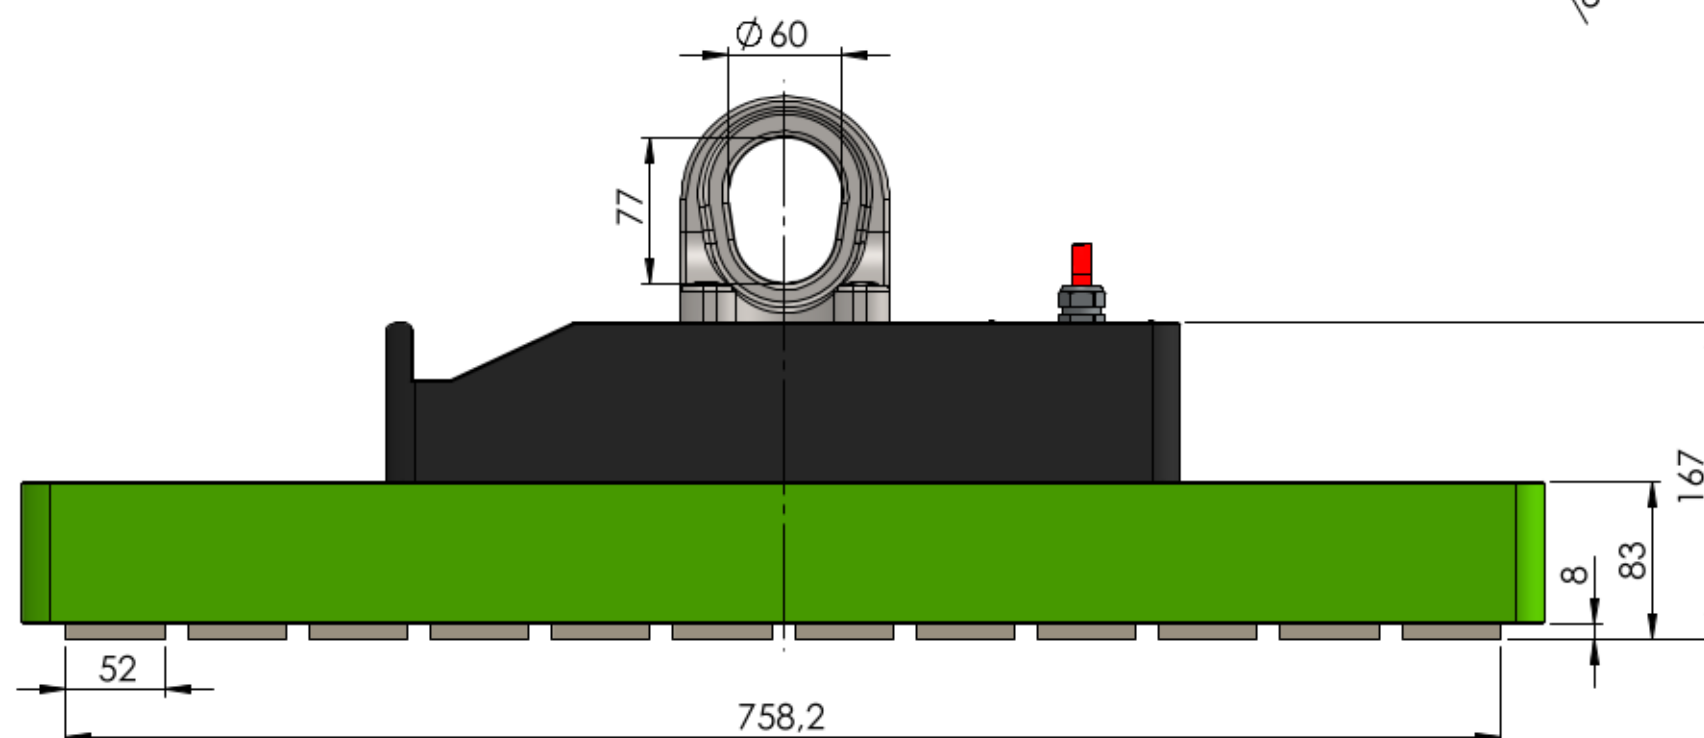
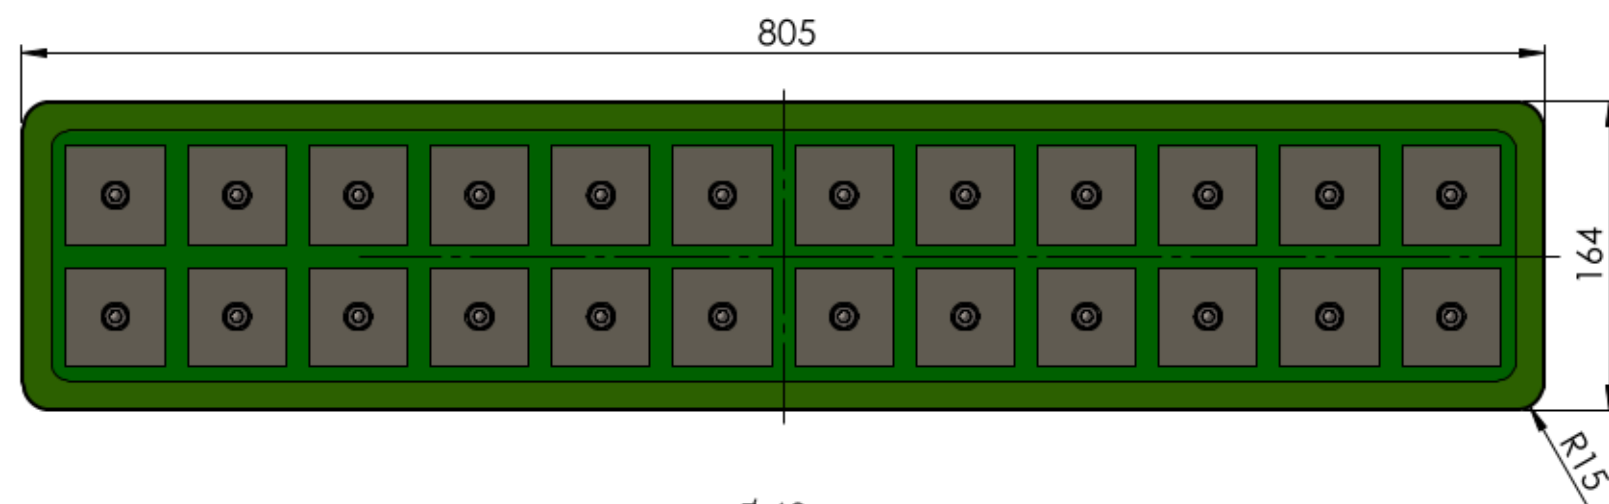


Specification FXE 2400-50+


Nominative Force: 91,2kN	lifting capacity EN 13155/WLL
Materialthickness >15mm (100%)	WLL= 2400kg
13,5 kVA	
U: 380-480V Pulse	Protection Class IP 65
R: 2Ω	Protectiv Earth SK I

Max. Load capacity at sheets and 4-edge pipes

T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=4mm	3000	1500	400
>=6mm	3000	2000	700
>=8mm	3000	2000	1200
>=10mm	3000	2000	2000
>=15mm	3000	2500	2500

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!

All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO
7168 M

material: weight: 80

drawing no.: 0022713

description: FXE 2400-50+

part no.: 10602411

sheet 1 / 1

A3

scale: 1:4 Status: Freigegeben

VEGA TECHNIK

rev. change date name