

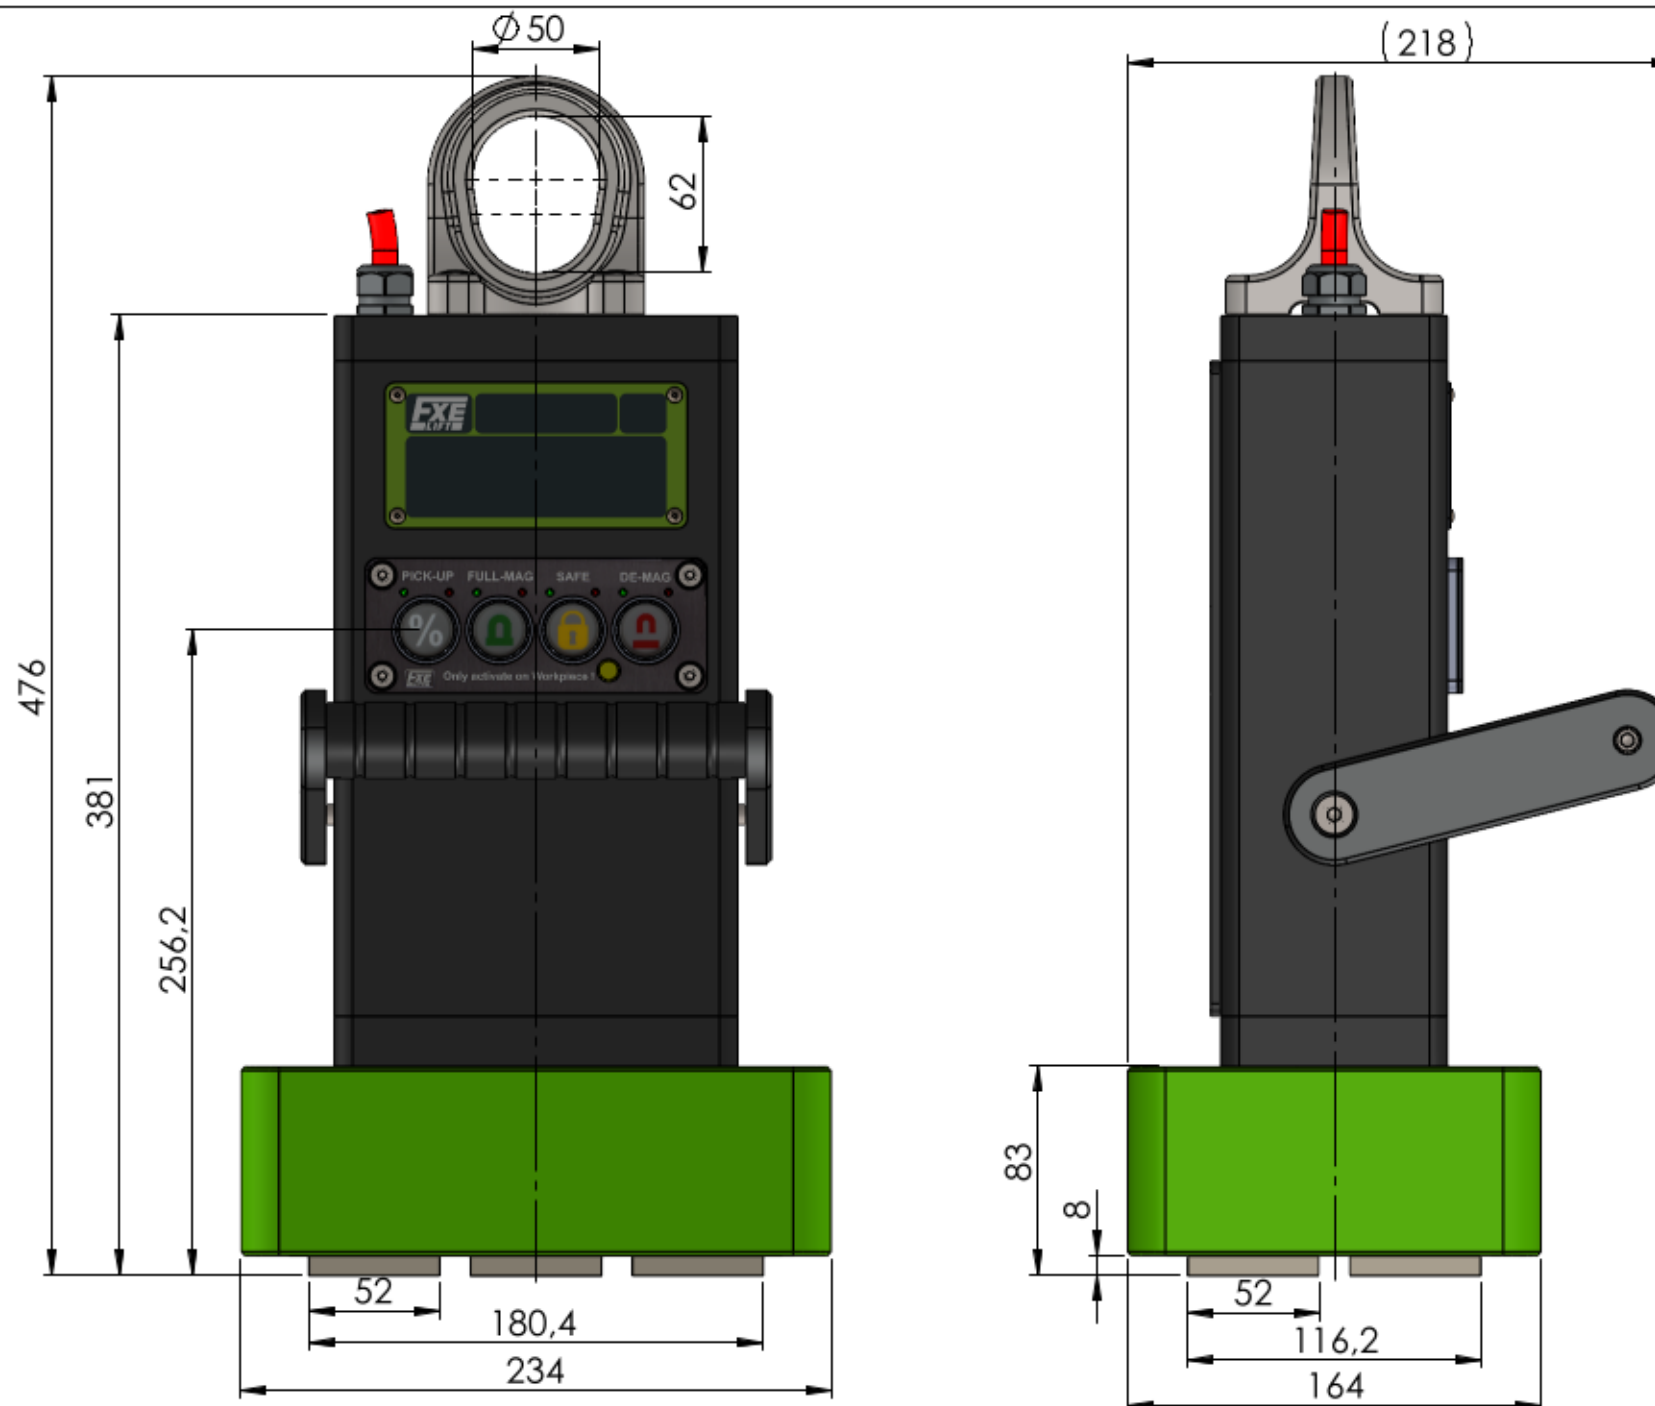
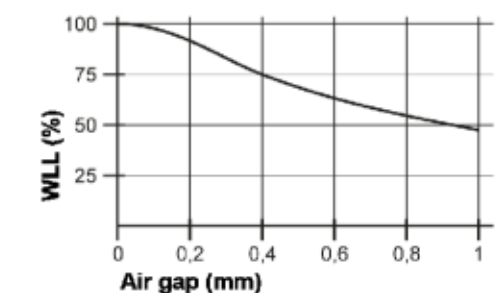


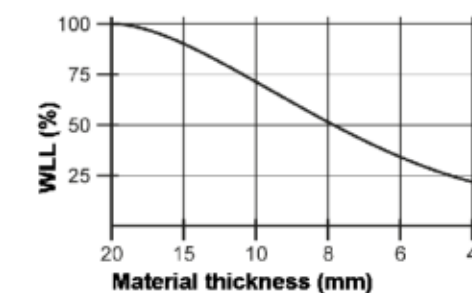

2m Cable/
optional Spiral cable 1-5m

Front board control panel
Pick-Up/Full-Mag/Safe/De-Mag

Adjustable handle

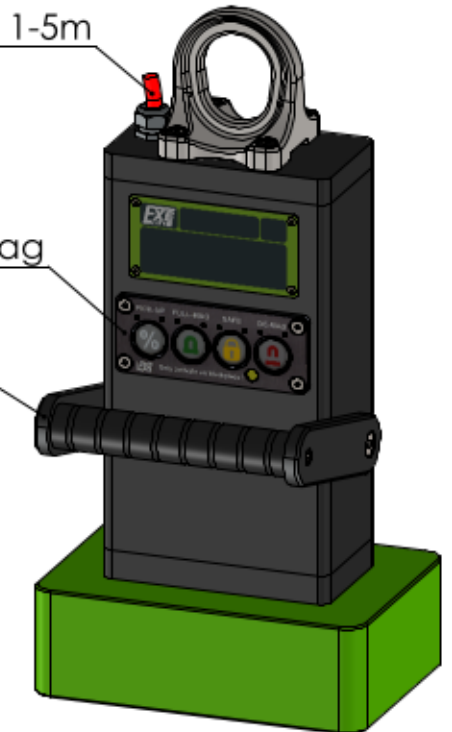


Specification FXE 500-50+

Nominative Force: 22,8kN	lifting capacity EN 13155/WLL
Materialthickness >15mm (100%)	WLL= 500kg
3,5kVA	
U: 380-480V Pulse	Protection Class IP 65
R: 7,8Ω	Protectiv Earth SK I

Max. Load capacity at sheets and 4-edge pipes

T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=4mm	1800	1500	100
>=6mm	2000	1500	200
>=8mm	2000	1500	300
>=10mm	2000	1500	400
>=15mm	2000	1500	500

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!
All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO
7168 M

material: weight: 34.00

drawing no.: 0015479

description: FXE 500-50+

part no.: 10600511

sheet
1 / 1
A3

scale: 1:3

Status: Freigegeben

VEGA TECHNIK

rev.	change	date	name
02	Tabellenwerte	20.10.2023	TW