

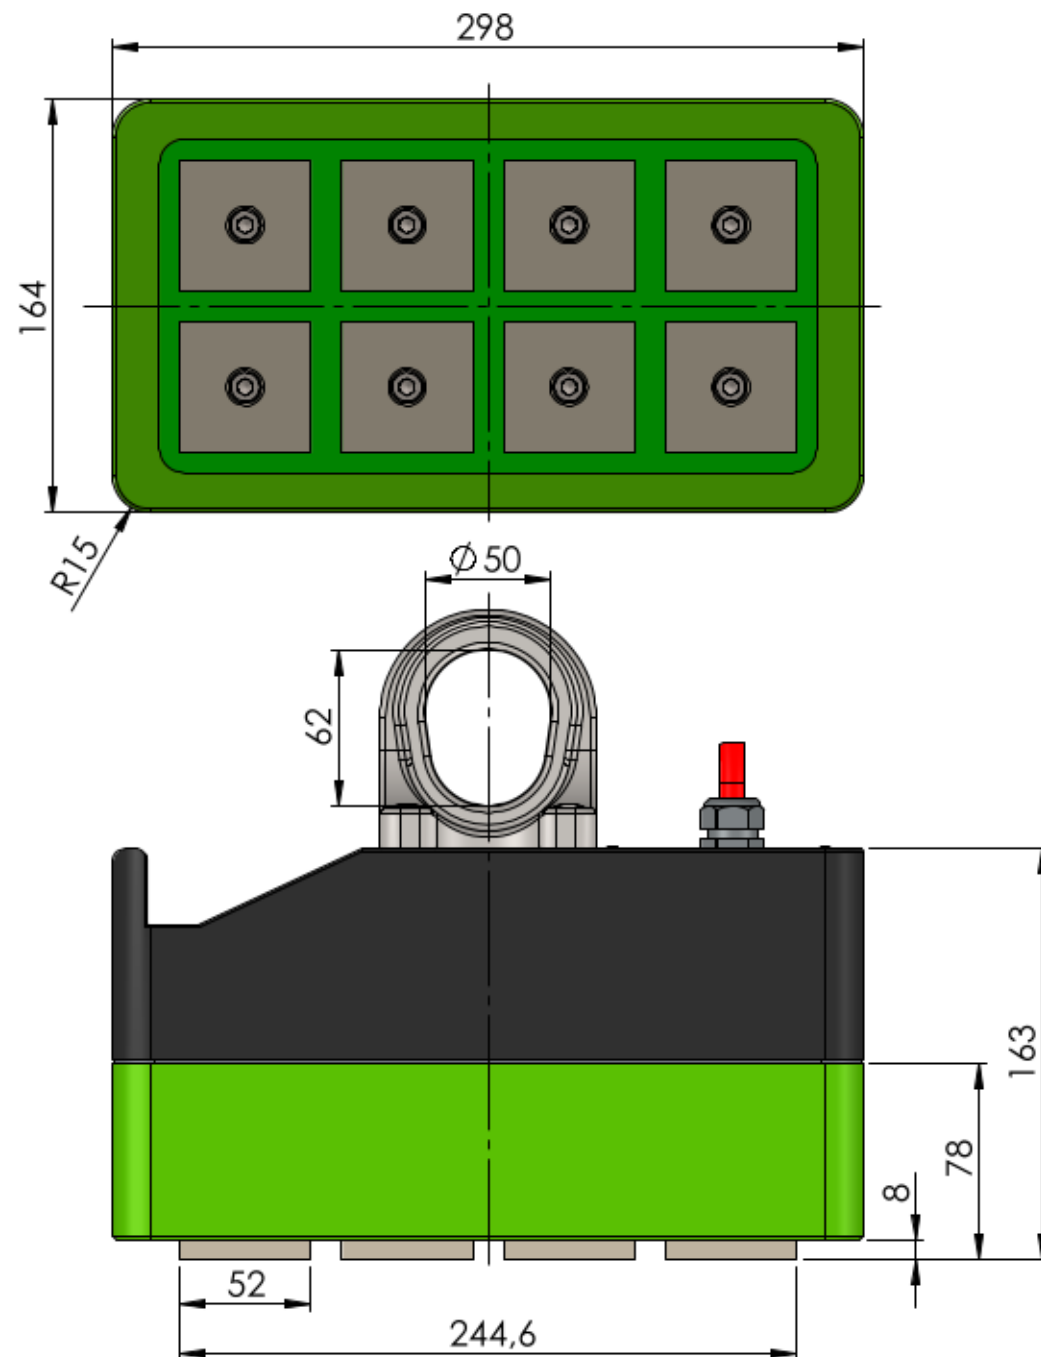
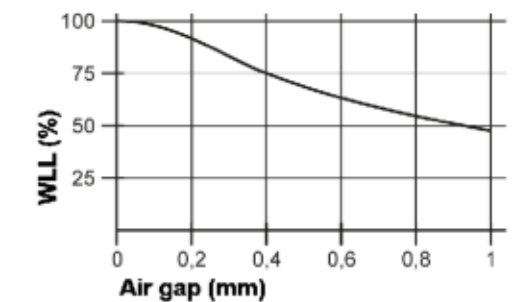
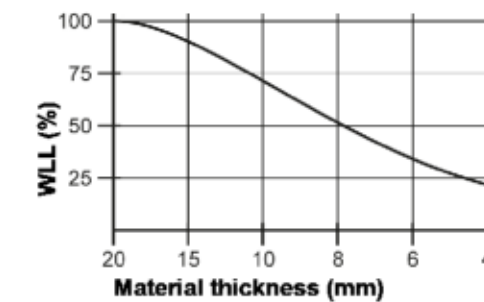


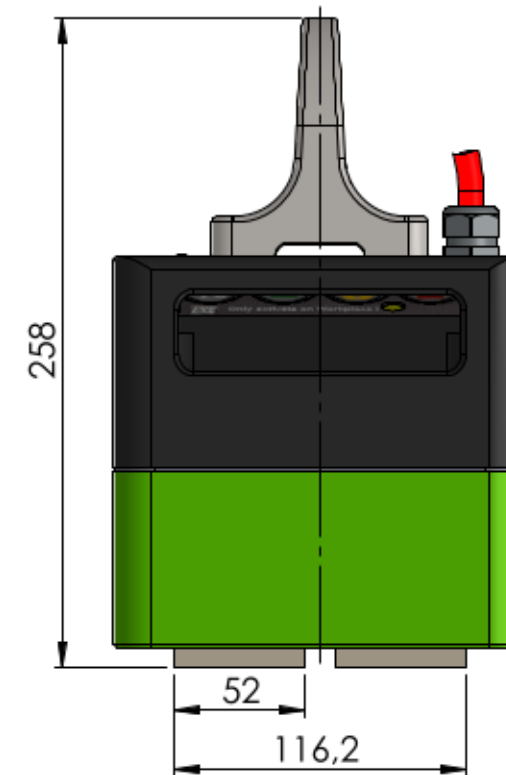

Front board control panel
Pick-Up/Full-Mag/Safe/De-Mag

2m cable,
optional Spiral cable 1-5m

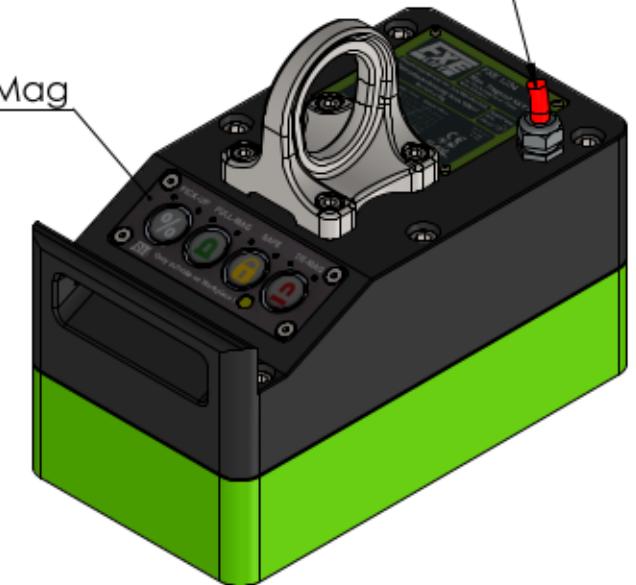


Specification FXE 750-50+

Nominative Force: 30,4kN	lifting capacity EN 13155/WLL
Materialthickness >15mm (100%)	WLL= 750kg
4,3 kVA	
U: 380-480V Pulse	Protection Class IP 65
R: 6,3Ω	Protectiv Earth SK I

Max. Load capacity at sheets and 4-edge pipes

T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=4mm	1800	1500	150
>=6mm	2000	1500	250
>=8mm	2000	1500	400
>=10mm	2000	1500	600
>=15mm	3000	1500	750

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!
All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO
7168 M

material: weight: 30kg

drawing no.: 0017481

description: FXE 750-50+

part no.: 10600711 sheet 1 / 1 A3

scale: 1:3 Status: Freigegeben

VEGA TECHNIK

rev. change date name