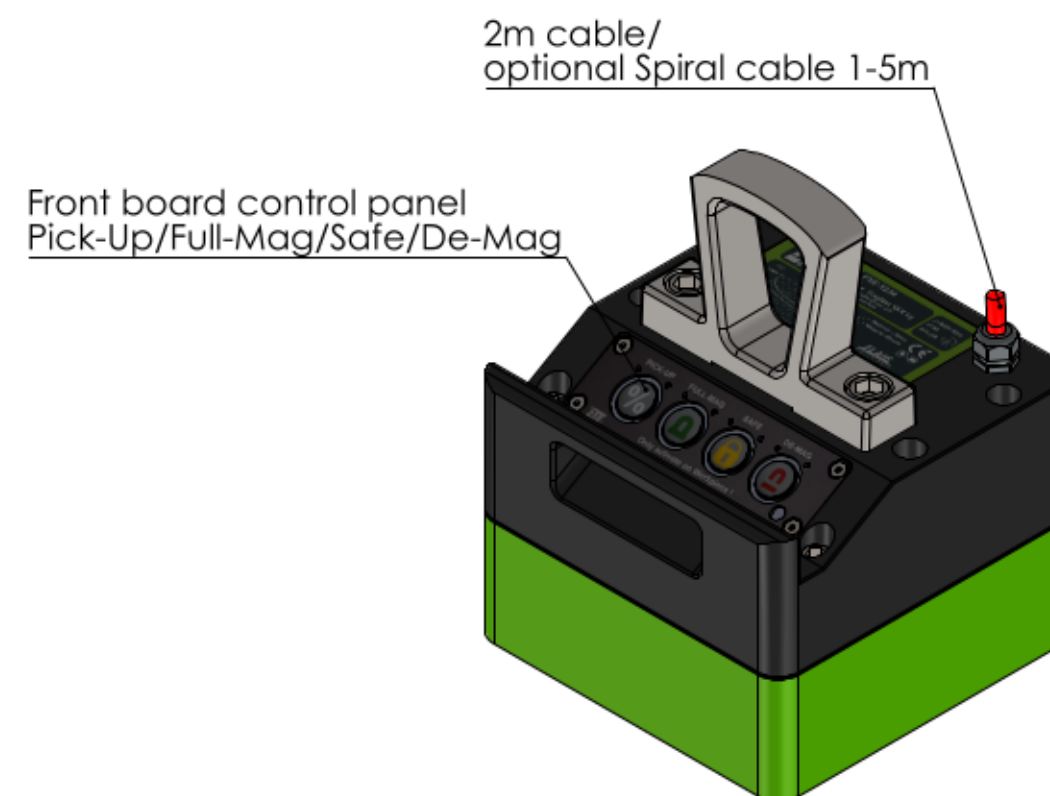
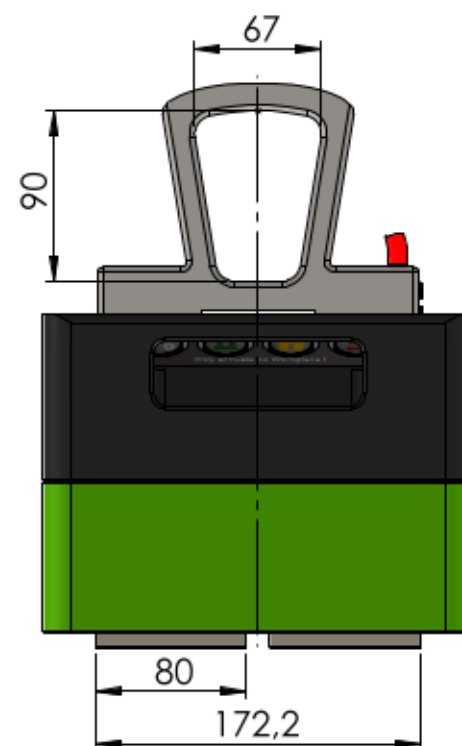
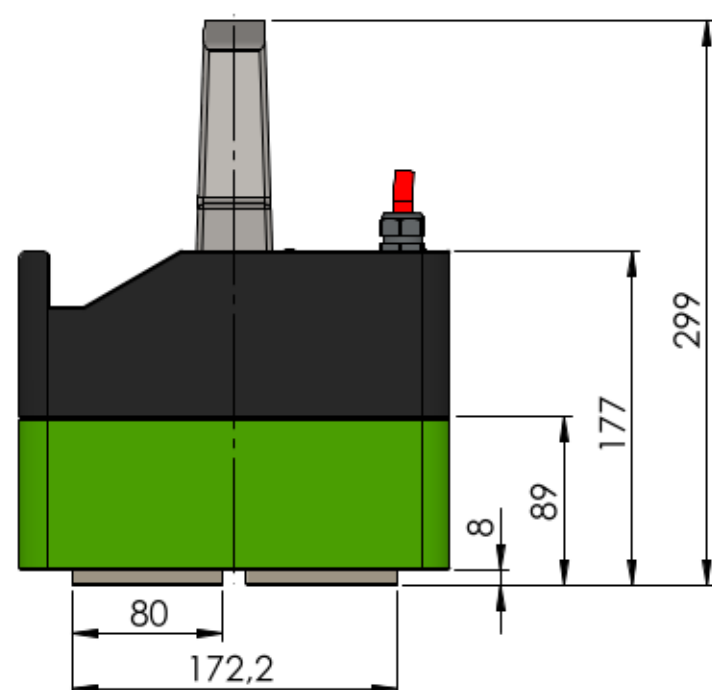
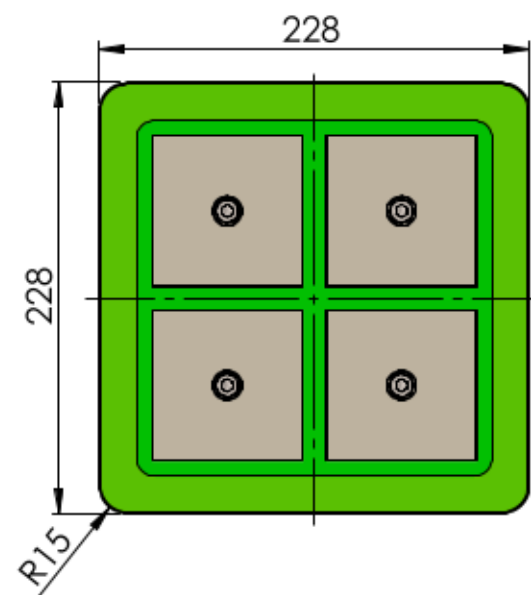


Specification FXE 1000-80			
Nominative Force: 36kN	lifting capacity EN 13155/WLL		
Materialthickness >25mm (100%)	WLL= 1000kg		
4,2kVA			
U: 380-480V Pulse	Protection Class IP 65		
R: 6,5Ω	Protectiv Earth SK I		
Max. Load capacity at sheets and 4-edge pipes			
T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=8mm	2000	1500	200
>=10mm	2000	1500	300
>=15mm	2000	1500	600
>=25mm	2000	1500	1000

Schutzvermerk nach DIN ISO 16016 beachten! Nachdruck nur mit unserer Genehmigung!				3,2 -0,05 -0,2		tolerance	material:	weight: 39.00
All rights reserved according to DIN ISO 16016! Reprint with our permission only!				date		ISO 7168 M	drawing no.: 0015442	
				drawn	24.10.2023	name TW	description: FXE 1000-80	
				appr.	24.10.2023	TW		
				VEGATECHNIK			part no.: 10601002	
							sheet 1 / 1	
							A3	
rev.	change	date	name				scale: 1:4	Status: Freigegeben