

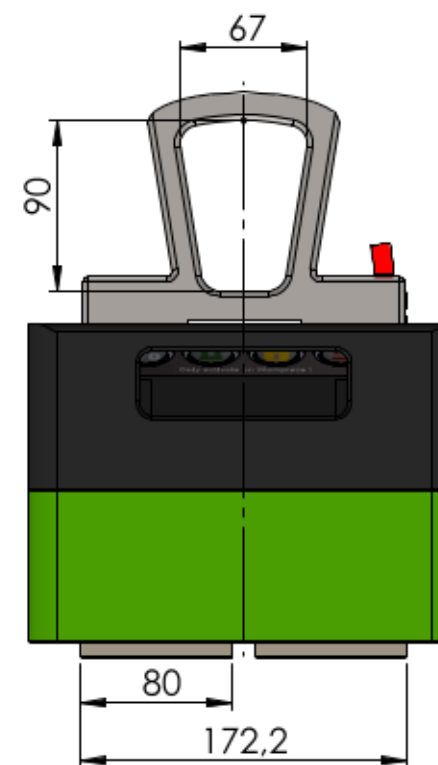
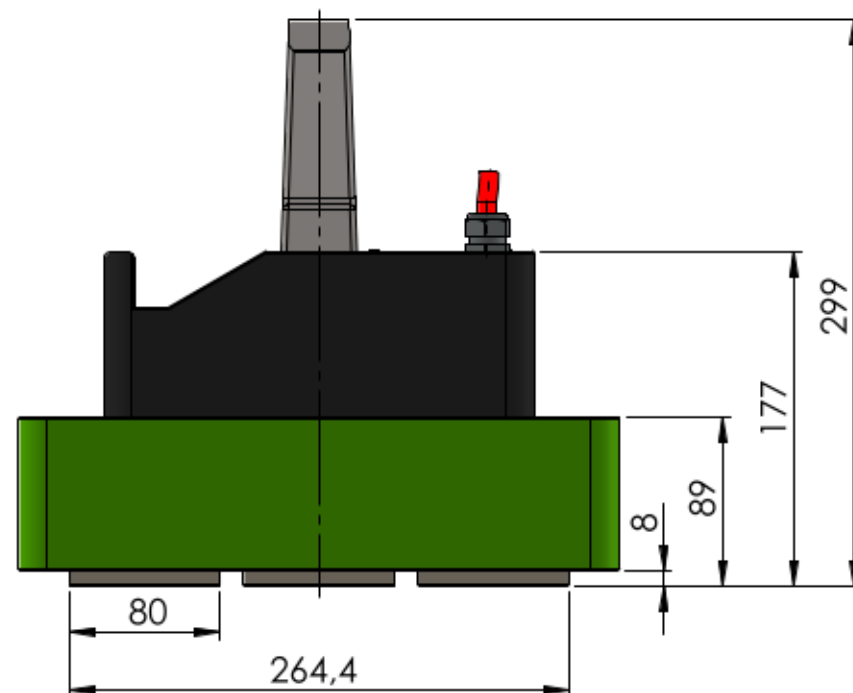



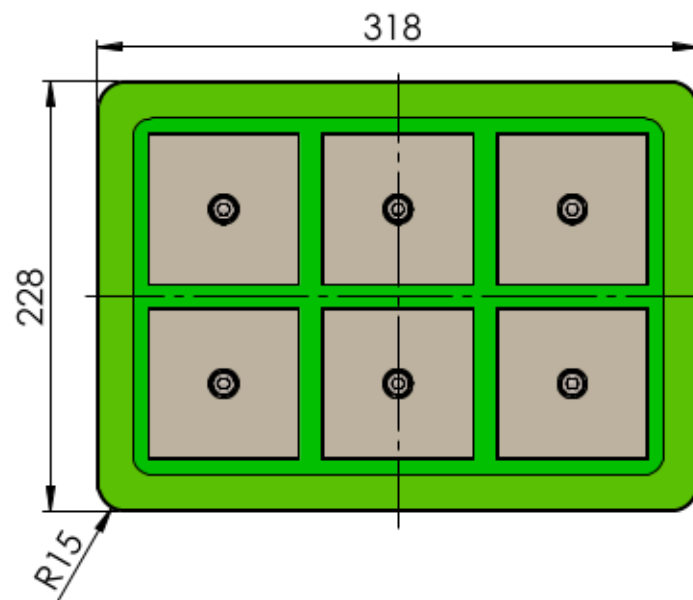


Front board control panel
Pick-Up/Full-Mag/Safe/De-Mag

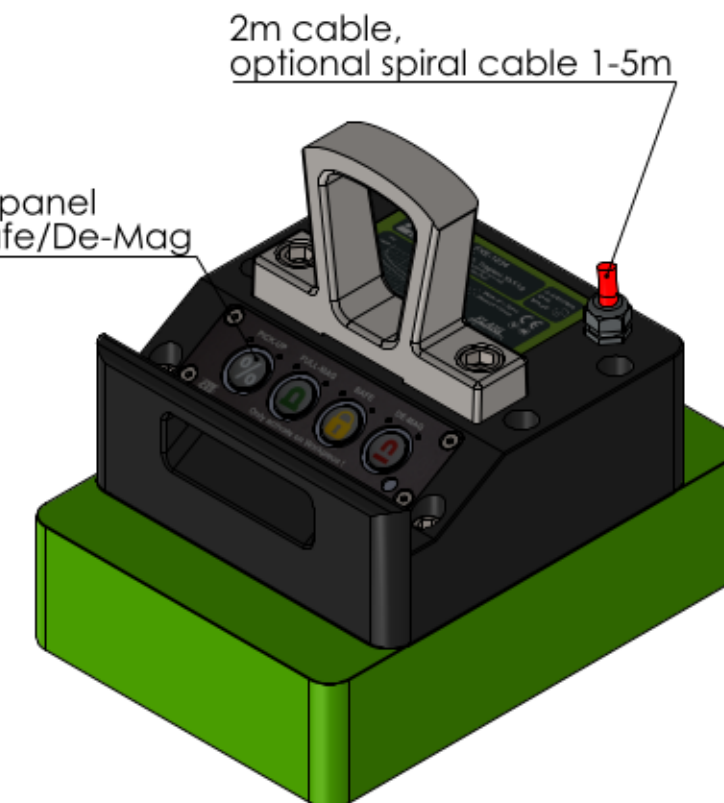


Specification FXE 1500-80

Nominative Force: 54kN	lifting capacity EN 13155/WLL		
Materialthickness >25mm (100%)	WLL= 1500kg		
6,8kVA			
U: 380-480V Pulse	Protection type IP 65		
R: 4Ω	Protection category SK I		
Max. Load capacity at sheets and 4-edge pipes			
T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=8mm	2000	1500	300
>=10mm	2500	1500	450
>=15mm	2500	1500	900
>=25mm	2500	2000	1500

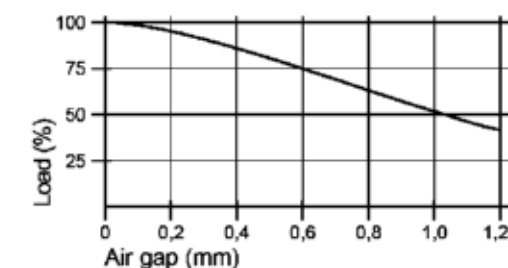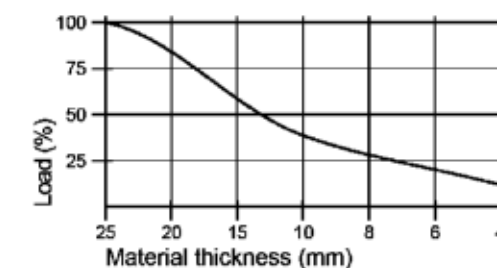

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!
All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO
7168 M

material:	weight: 52kg
drawing no.:	0018536
description: FXE 1500-80	
part no.:	10601502
scale: 1:4	Status: Freigegeben
sheet 1 / 1	A3