

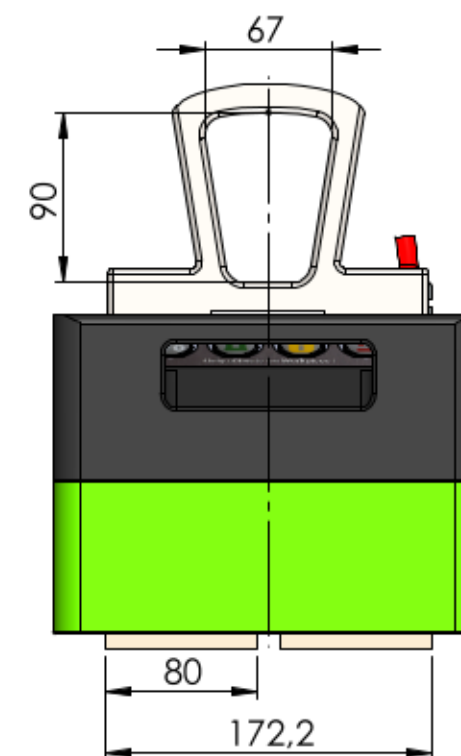
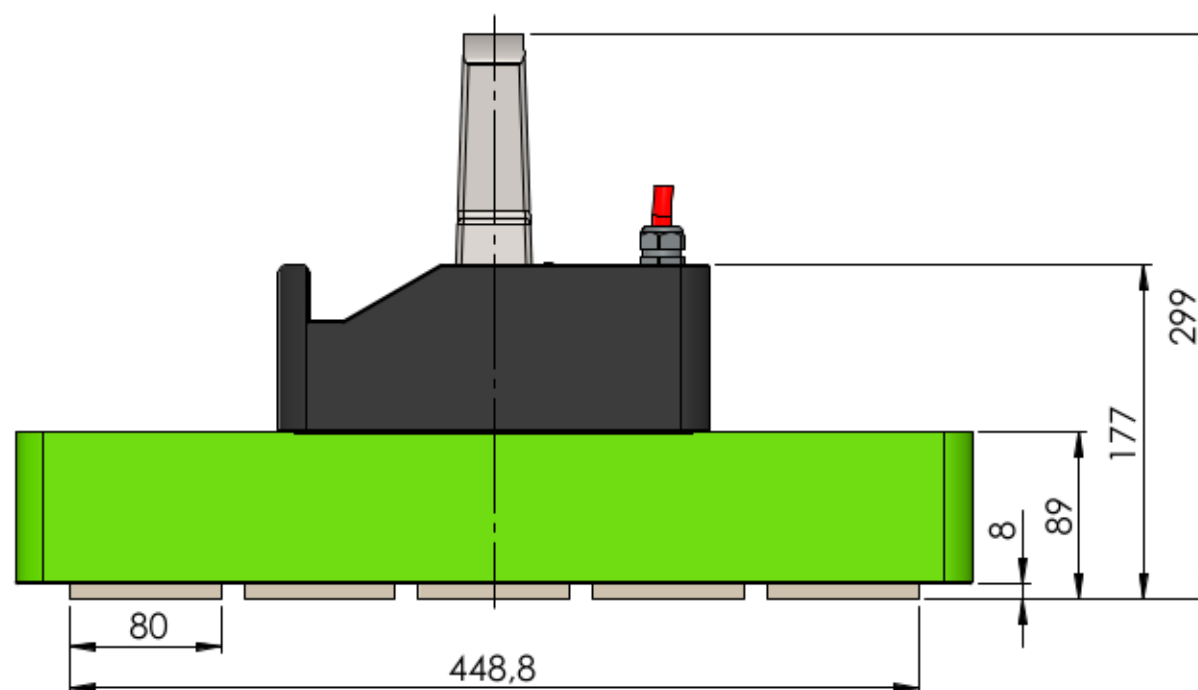


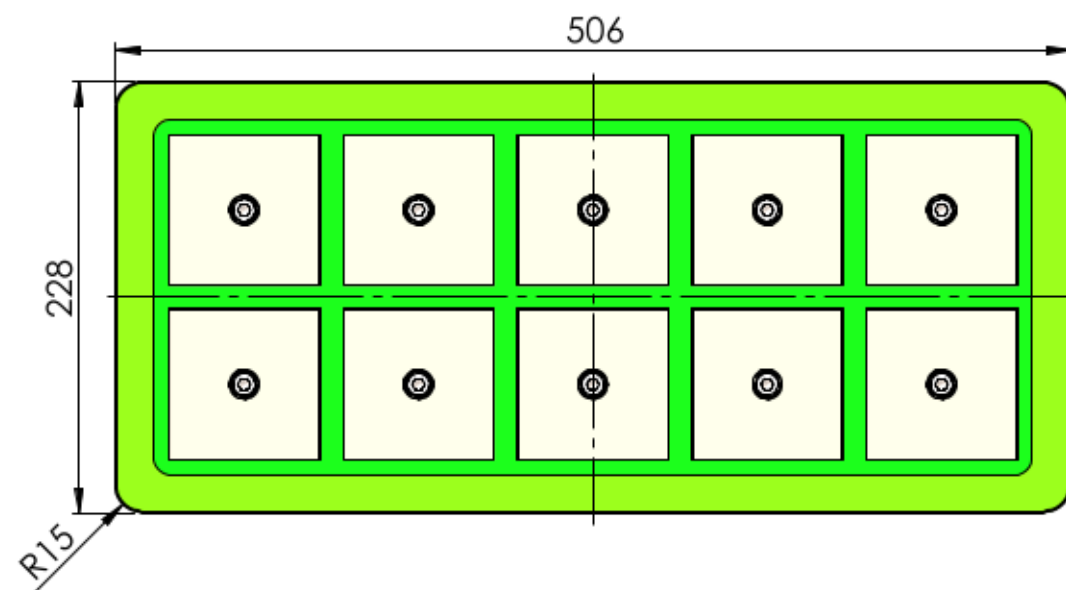



Front board control panel
Pick-Up/Full-Mag/Safe/De-Mag

2m cable,
optional spiral cable 1-5m

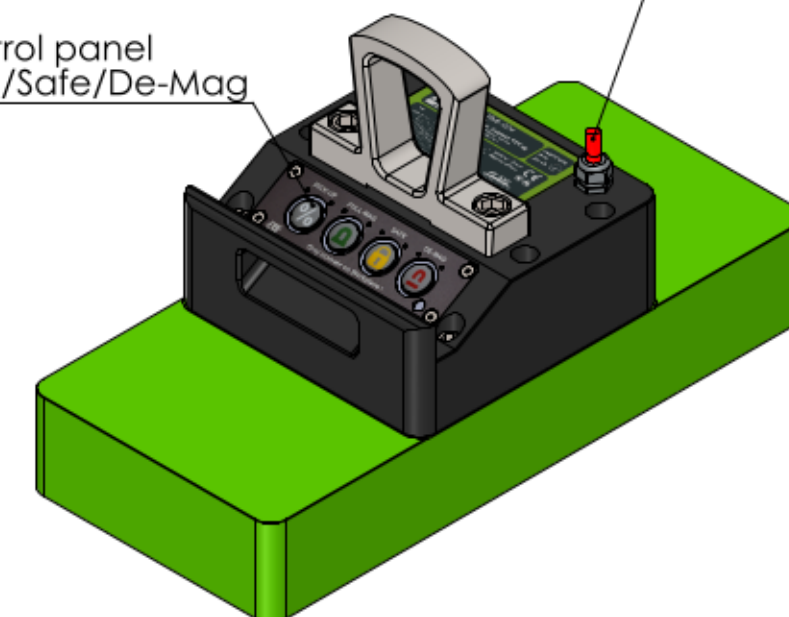


Specification FXE 2500-80

Nominative Force: 90kN	lifting capacity EN 13155/WLL		
Materialthickness >25mm (100%)	WLL= 2500kg		
10,8kVA			
U: 380-480V Pulse	Protection type IP 65		
R: 2,5Ω	Protection category SK I		
Max. Load capacity at sheets and 4-edge pipes			
T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=8mm	2000	1500	500
>=10mm	3000	1500	750
>=15mm	3000	1500	1500
>=25mm	3000	2000	2500

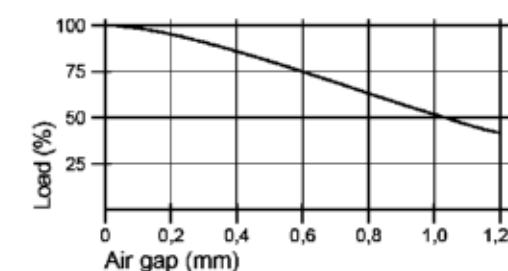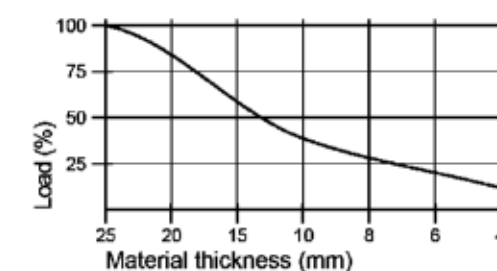

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!
All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO 7168 M

material:	weight: 77kg
drawing no.:	0017805
description: FXE 2500-80	
part no.:	10602502
scale: 1:4	Status: Freigegeben
sheet 1 / 1	A3

VEGA TECHNIK