




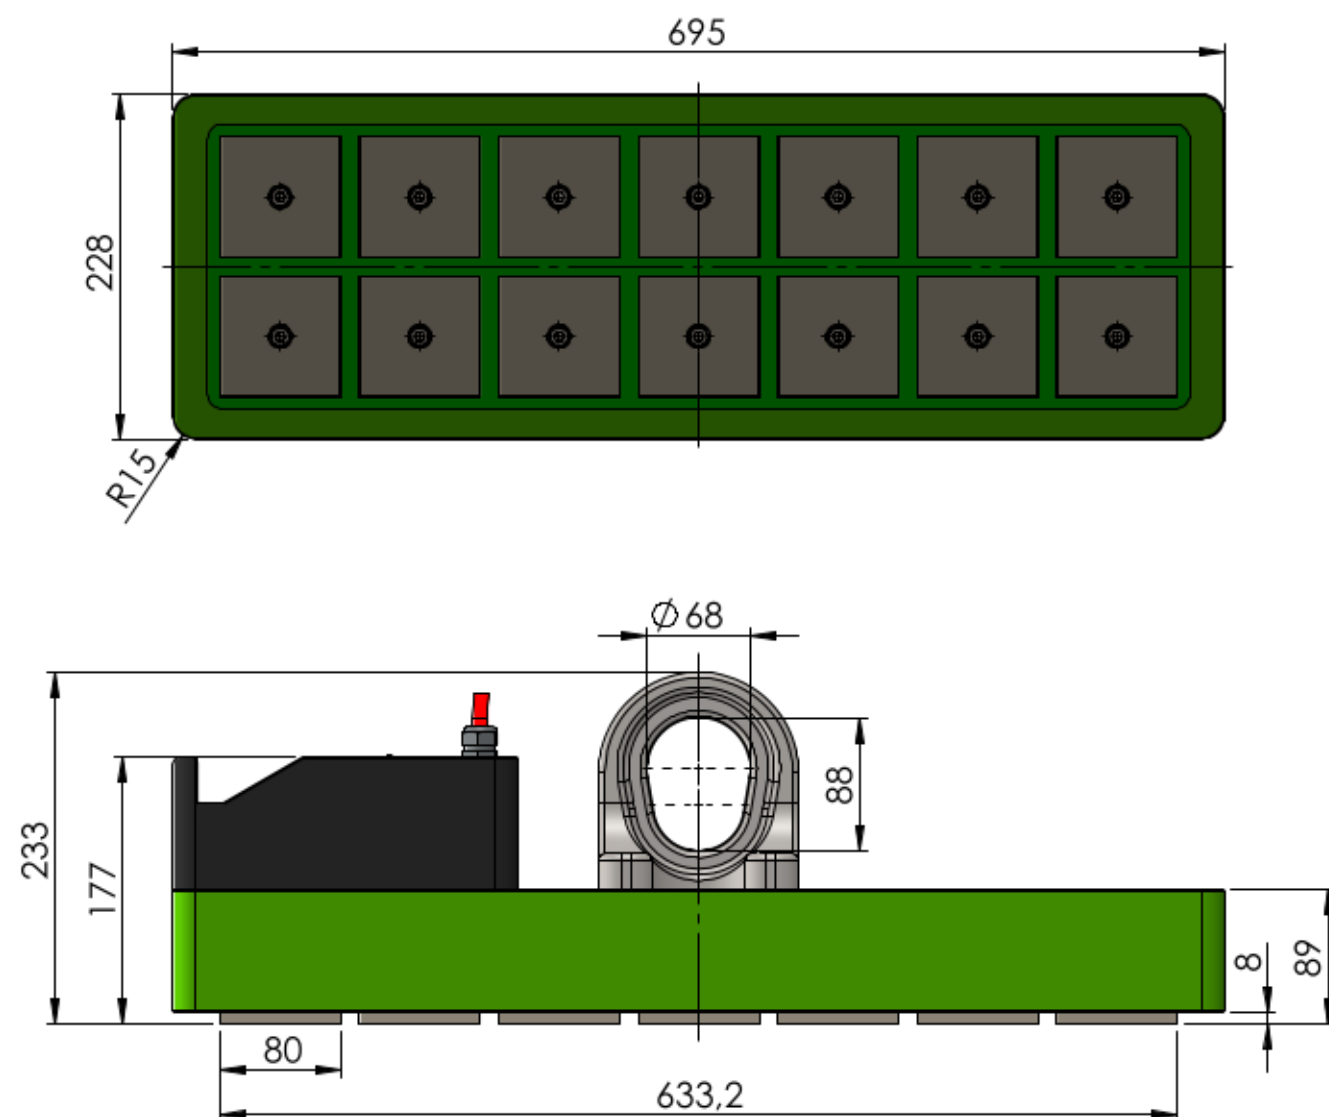

2m cable
optional Spiral cable 1-5m


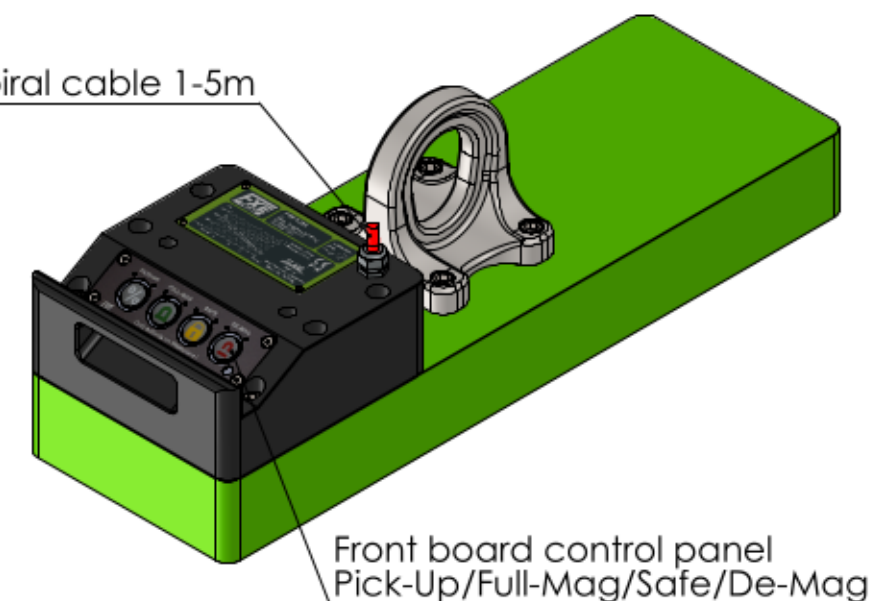


Front board control panel
Pick-Up/Full-Mag/Save/De-Mag

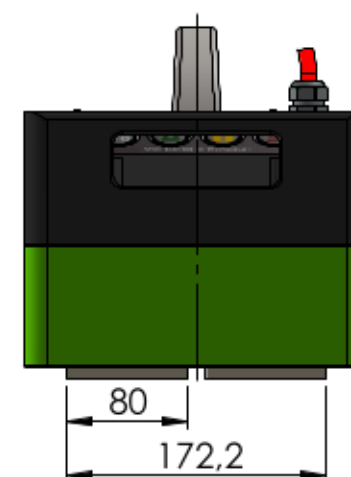


Specification FXE 3200-80

Specification FXE 3200-80			
Nominative Force: 126kN	lifting capacity EN 13155/WLL		
Materialthickness >25mm (100%)	WLL= 3200kg		
15 kVA			
U: 380-480V Pulse	Protection Class IP 65		
R: 1,8Ω	Protectiv Earth SK I		
Max. Load capacity at sheets and 4-edge pipes			
T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=8mm	2000	1500	600
>=10mm	2500	1500	900
>=15mm	2500	1500	1800
>=25mm	3000	1500	3200

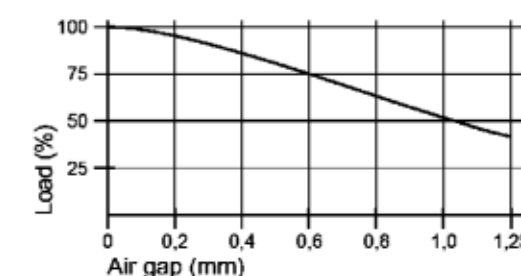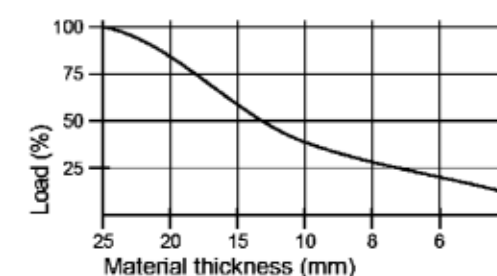

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!
All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO
7168 M

material:	weight: 120kg
drawing no.:	0018547
description:	FXE 3200-80
part no.:	10603202
scale: 1:5	Status: Freigegeben
sheet 1 / 1	A3

VEGA TECHNIK

rev.	change	date	name
------	--------	------	------