

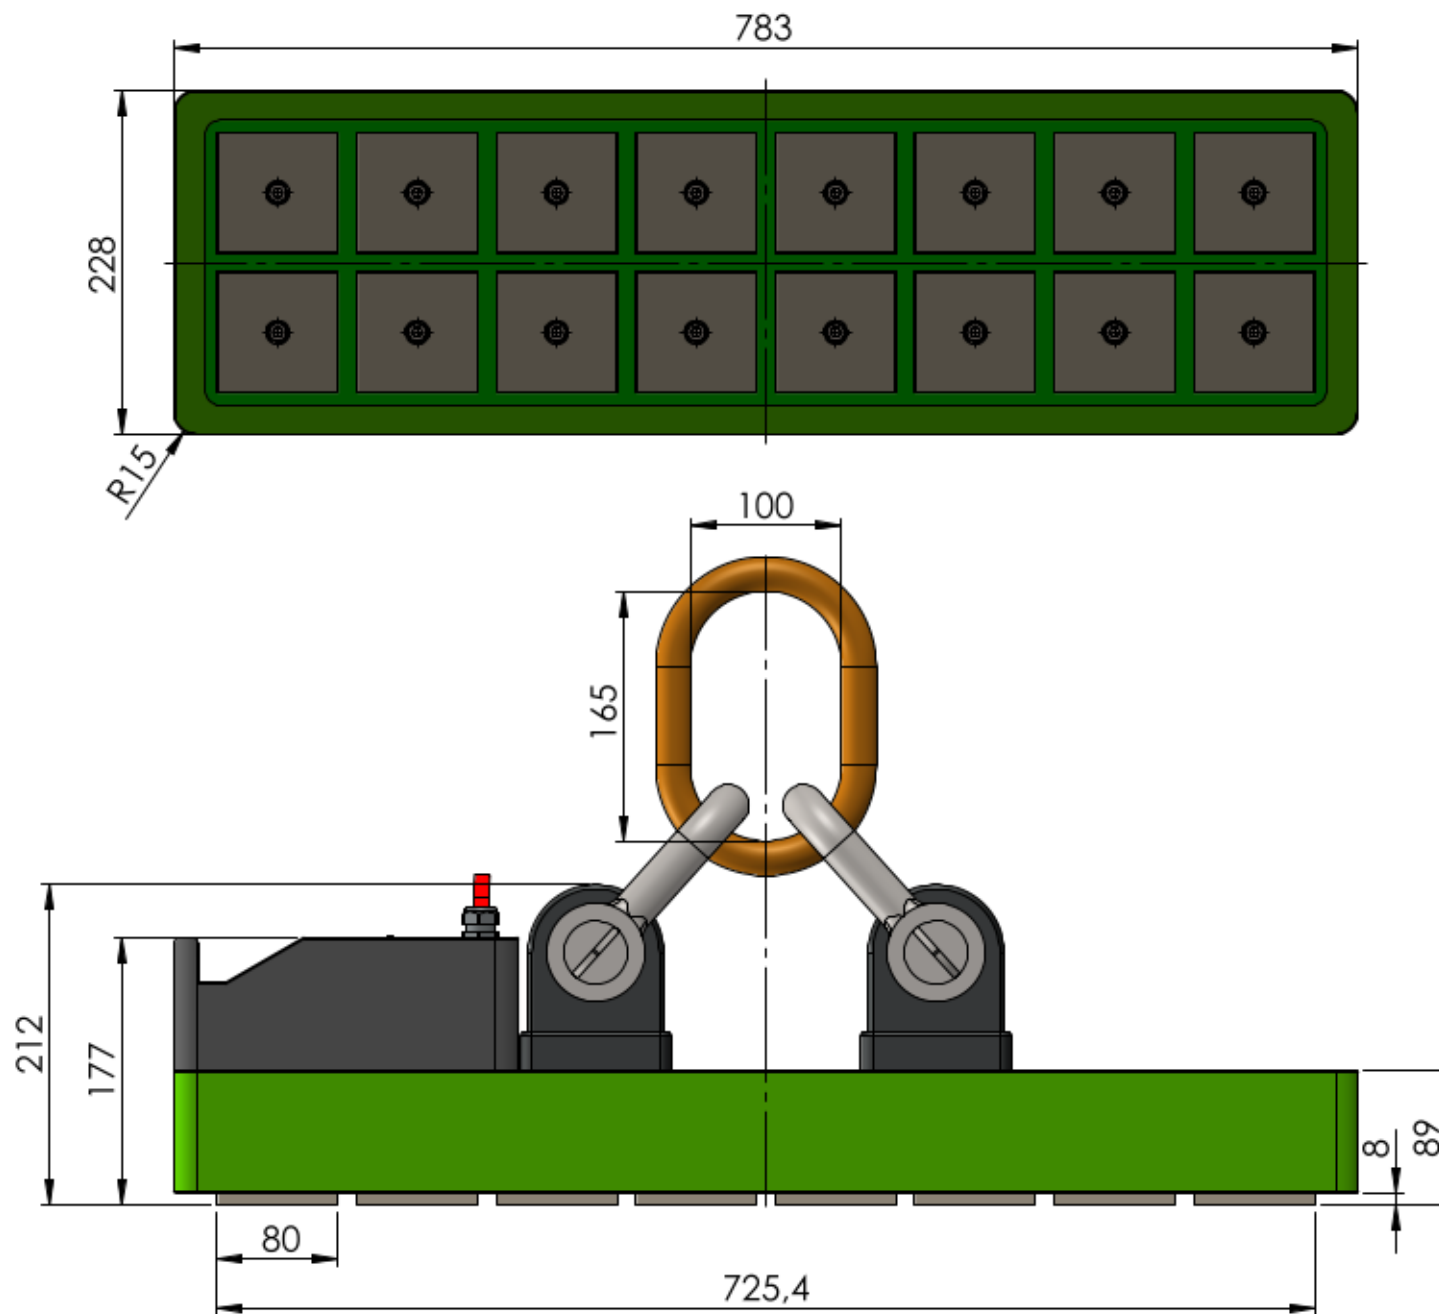
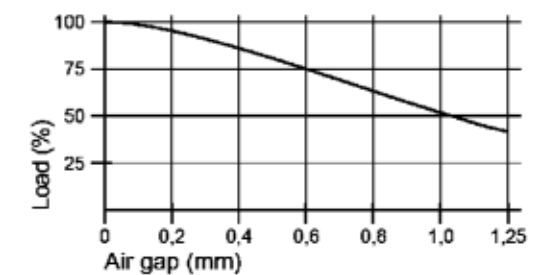
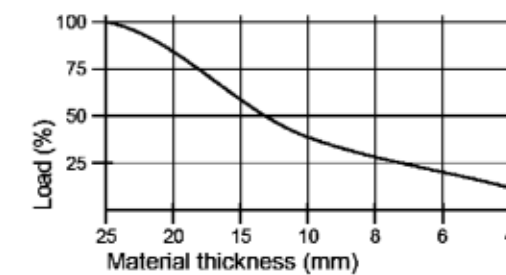


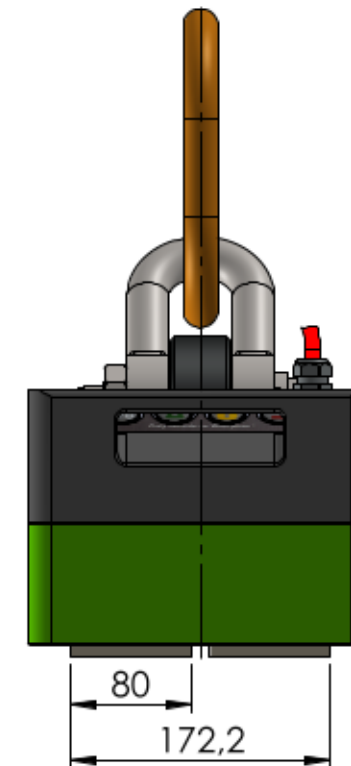


2m cable
optional Spiral cable 1-5m

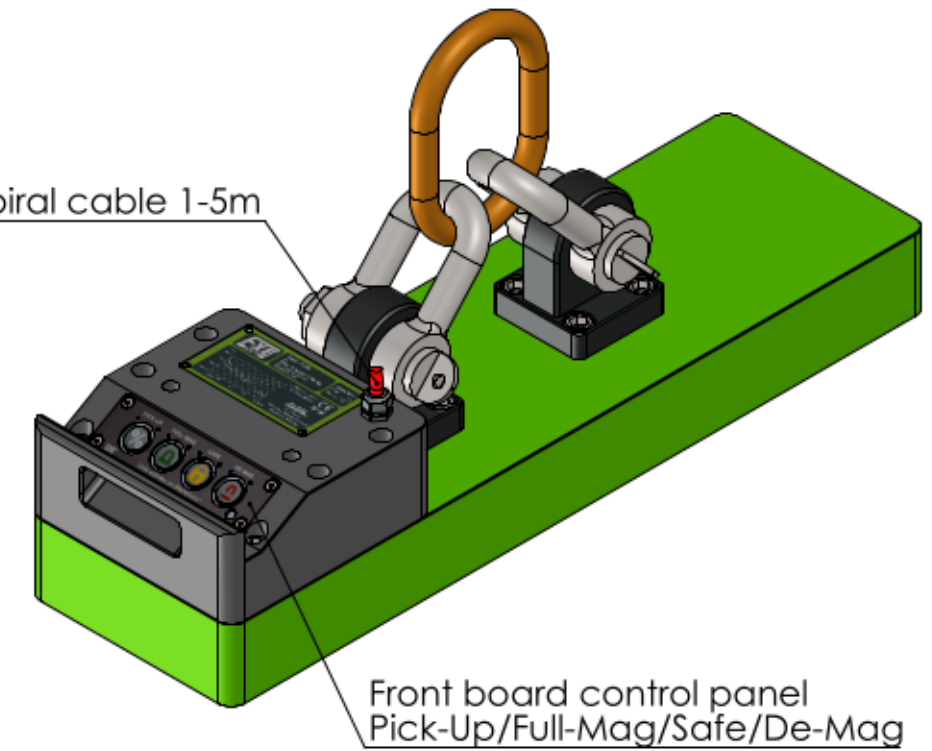

Specification FXE 4000-80

Specification FXE 4000-80			
Nominative Force: 144kN		lifting capacity EN 13155/WLL	
Materialthickness >25mm (100%)		WLL= 4000kg	
15 kVA			
U: 380-480V Pulse		Protection Class IP 65	
R: 1,8Ω		Protectiv Earth SK I	
Max. Load capacity at sheets and 4-edge pipes			
T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=8mm	3000	2000	800
>=10mm	3000	2000	1200
>=15mm	3500	2000	2400
>=25mm	4000	2500	4000

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!
All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO
7168 M

material:	weight: 132.00
drawing no.:	0018553
description: FXE 4000-80	
part no.:	10604002
scale: 1:5	Status: Freigegeben
sheet 1 / 1	A3

VEGA TECHNIK

02	Tabellenwerte	19.10.2023	TW
rev.	change	date	name