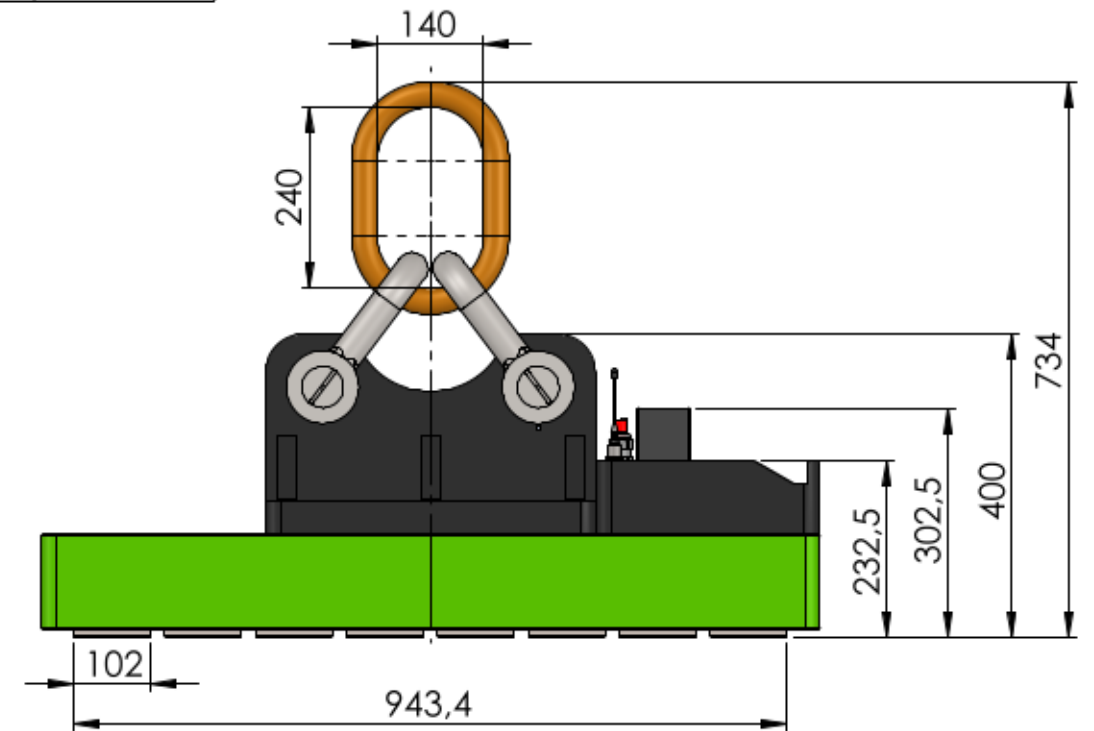
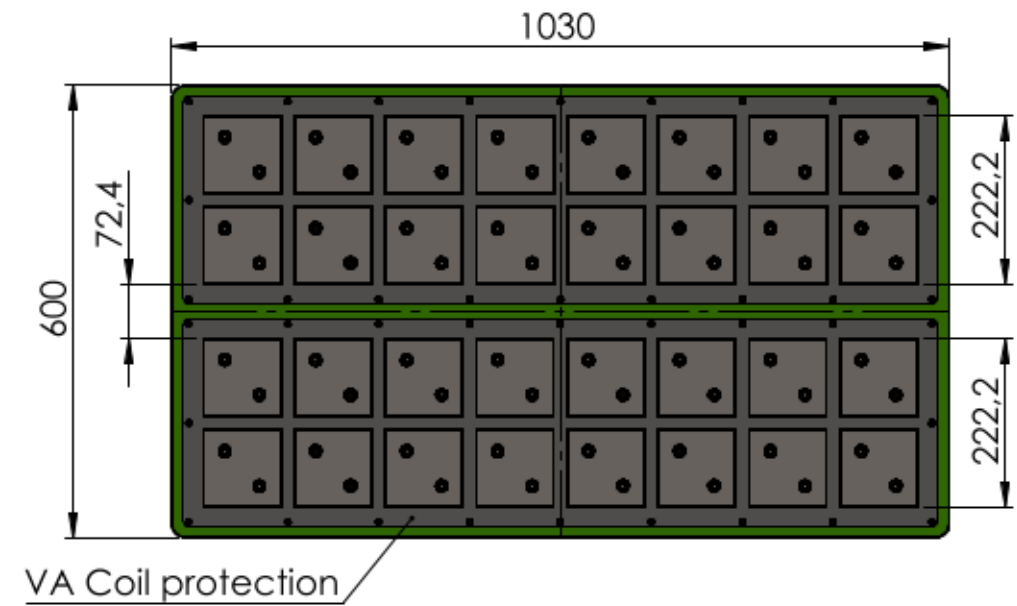
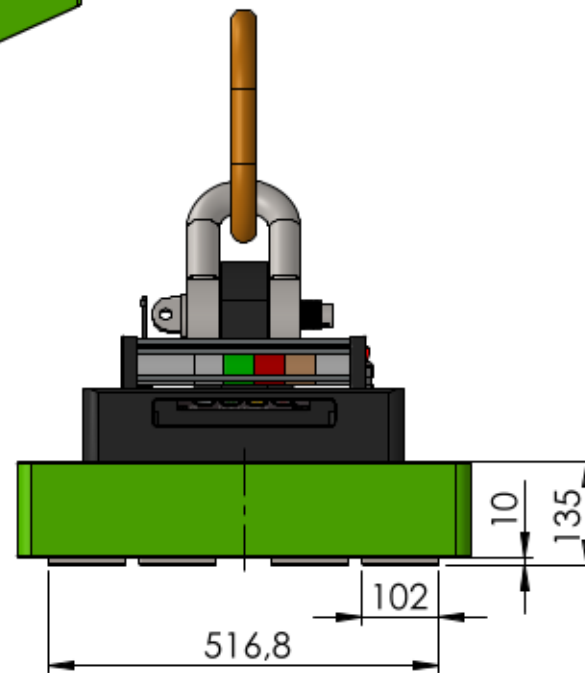
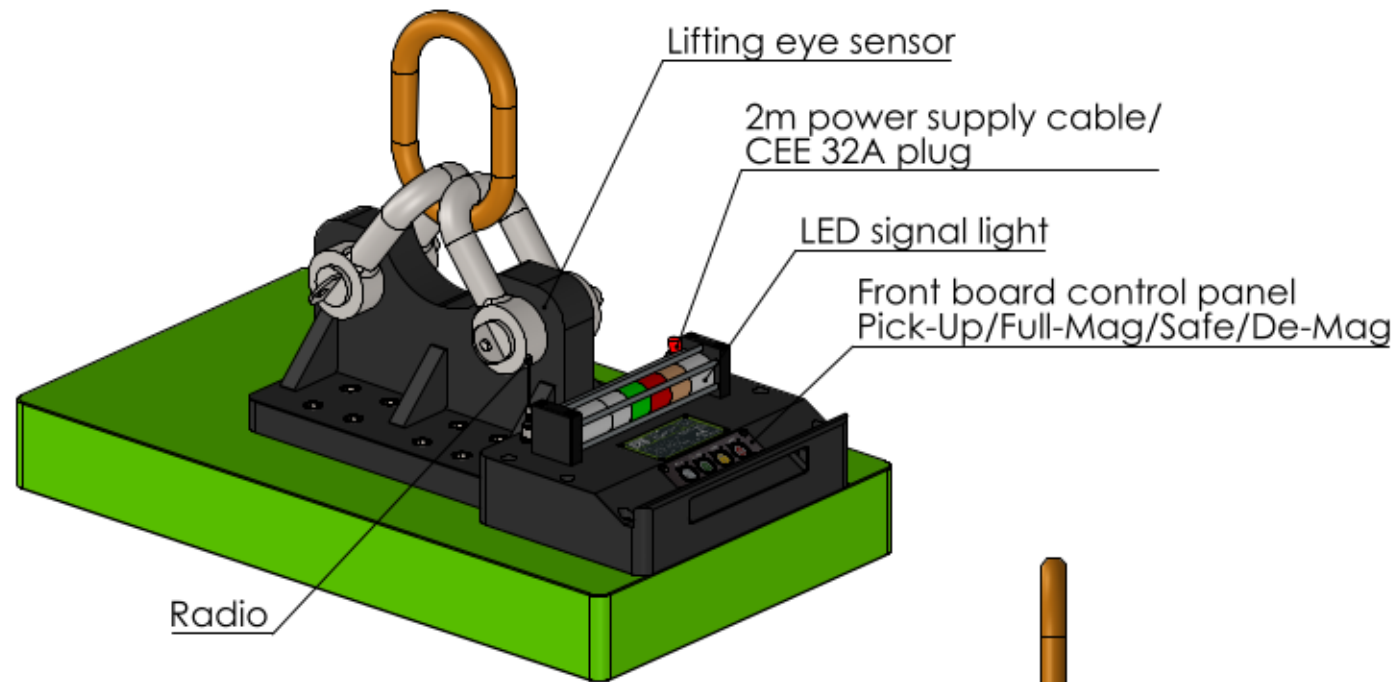


Specification FXE-HD 12800-100

Specification FXE-HD 12800-100			
Nominative Force: 464 kN		lifting capacity EN 13155/WLL	
Materialthickness >35mm (100%)		WLL= 12800kg at air gap 0,6mm	
15,9 kVA			
U: 380-480V Pulse		Protection type IP 65	
R: 4x 1,7Ω + 2x 2,5Ω		Protection category SK I	
Max. Load capacity at sheets and 4-edge pipes			
T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=10mm	3000	2000	4200
>=20mm	4500	2500	6400
>=35mm	6000	3200	12800

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!
All rights reserved according to DIN ISO 16016!
Reprint with our permission only!

3,2 / -0,05 / -0,2 tolerance
ISO 7168 M

material:	weight: 700.00
drawing no.:	0018835
description:	FXE-HD 12800-100
part no.:	106012803
scale: 1:10	Status: Freigegeben

rev.	change	date	name
06	Luftspaltkurve	27.06.2024	TW
05	Neue Funke	08.12.2023	TW
04	Tabellenwerte	19.10.2023	TW
03	Gewicht	12.05.2023	TW
02	Überarbeitet	27.01.2023	TW
01			

VEGA TECHNIK