
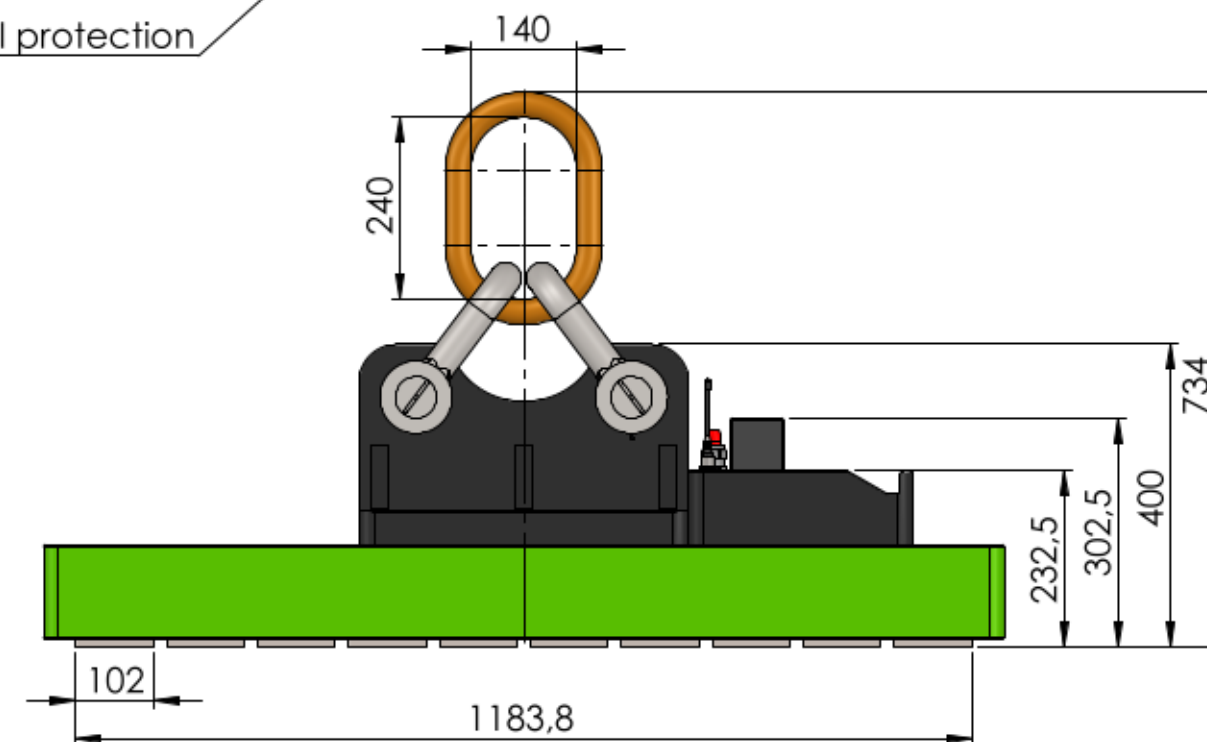
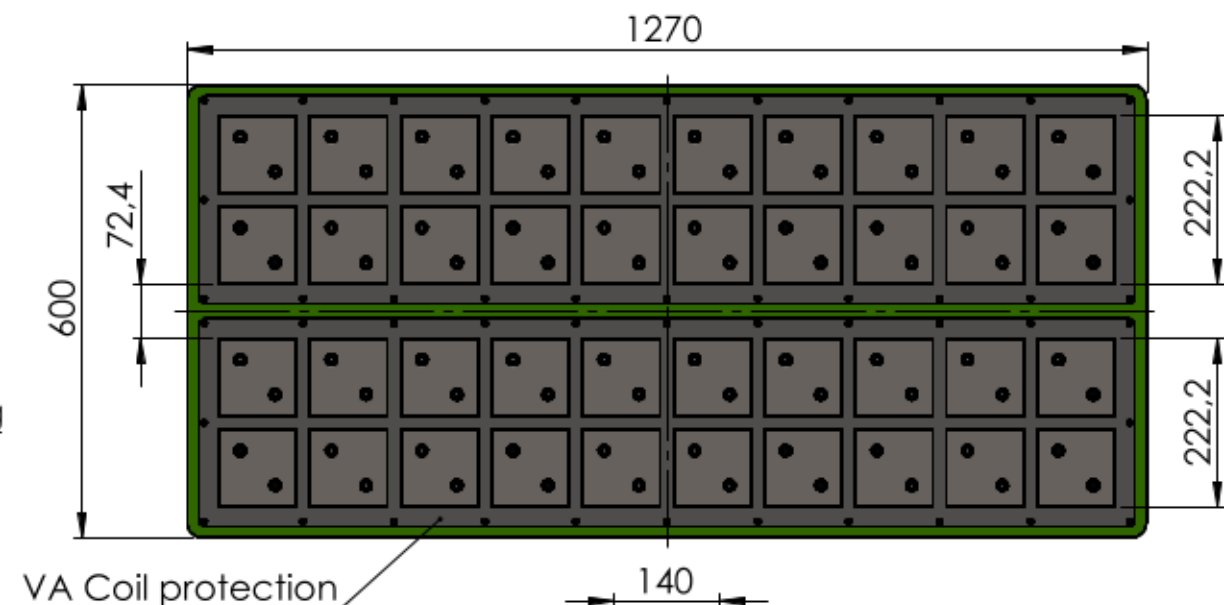
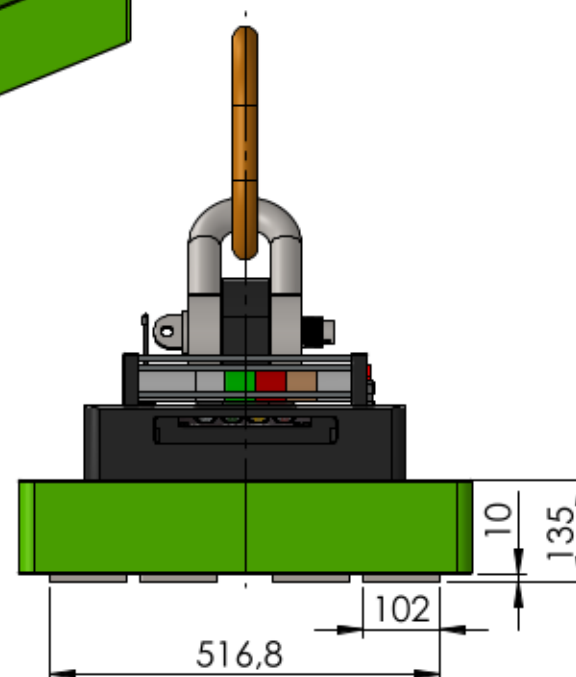
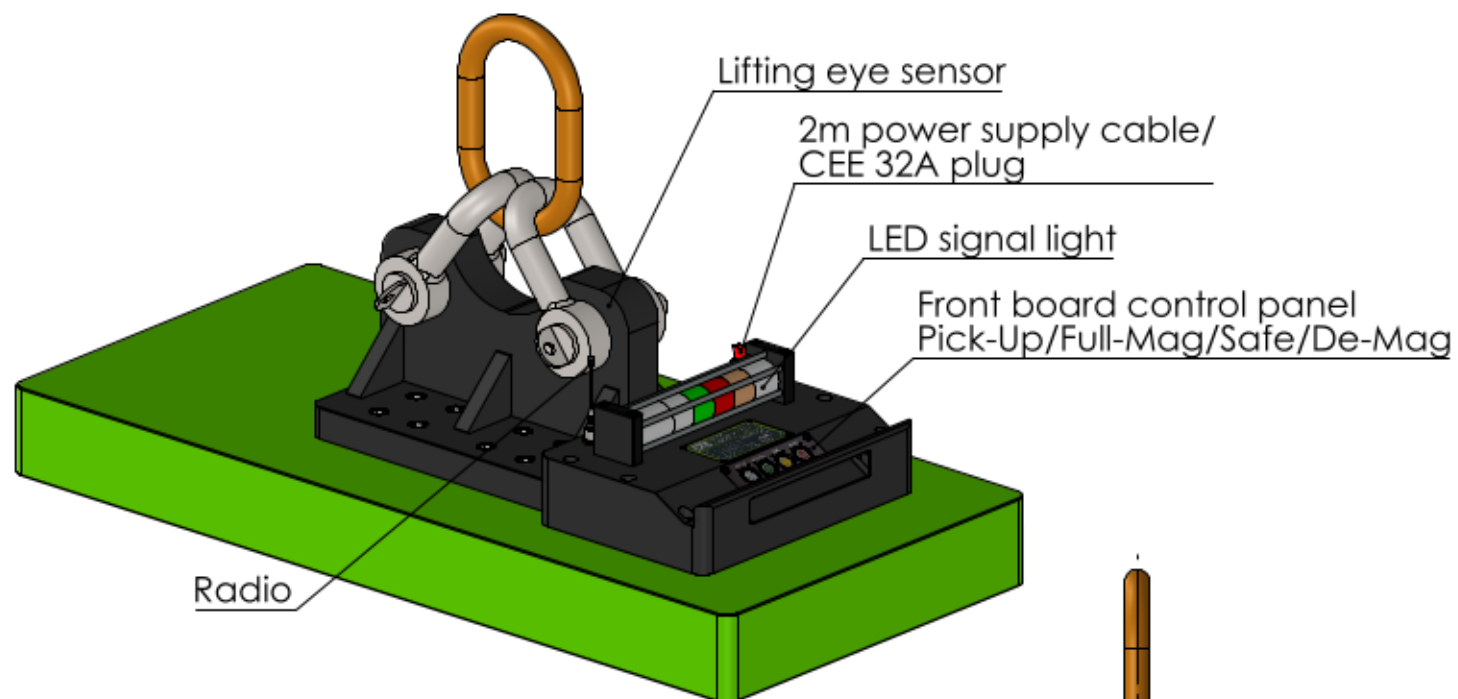


Specification FXE-HD 16000-100

Specification FXE-HD 16000-100			
Nominative Force: 580 kN		lifting capacity EN 13155/WLL	
Materialthickness >35mm (100%)		WLL= 16000kg at air gap 0,6mm	
15,9 kVA			
U: 380-480V Pulse		Protection type IP 65	
R: 2x 1,7Ω + 4x 2,0Ω		Protection category SK I	
Max. Load capacity at sheets and 4-edge pipes			
T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=10mm	3000	2000	4200
>=20mm	4500	2500	6400
>=35mm	6000	3200	16000

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!
All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO
7168 M

material: weight: 800.00

drawing no.: 0015783

description: FXE-HD 16000-100

part no.: 106016003

scale: 1:10 Status: Freigegeben

rev.	change	date	name
06	Luftspaltkurve	27.06.2024	TW
05	Neue Funke	08.12.2023	TW
04	Tabellenwerte	19.10.2023	TW
03	Gewicht	30.06.2023	TW
02	Überarbeitet	27.01.2023	TW

date	name
drawn 13.01.2022	BW
edit 27.06.2024	
appr. 27.06.2024	TW

VEGA TECHNIK