

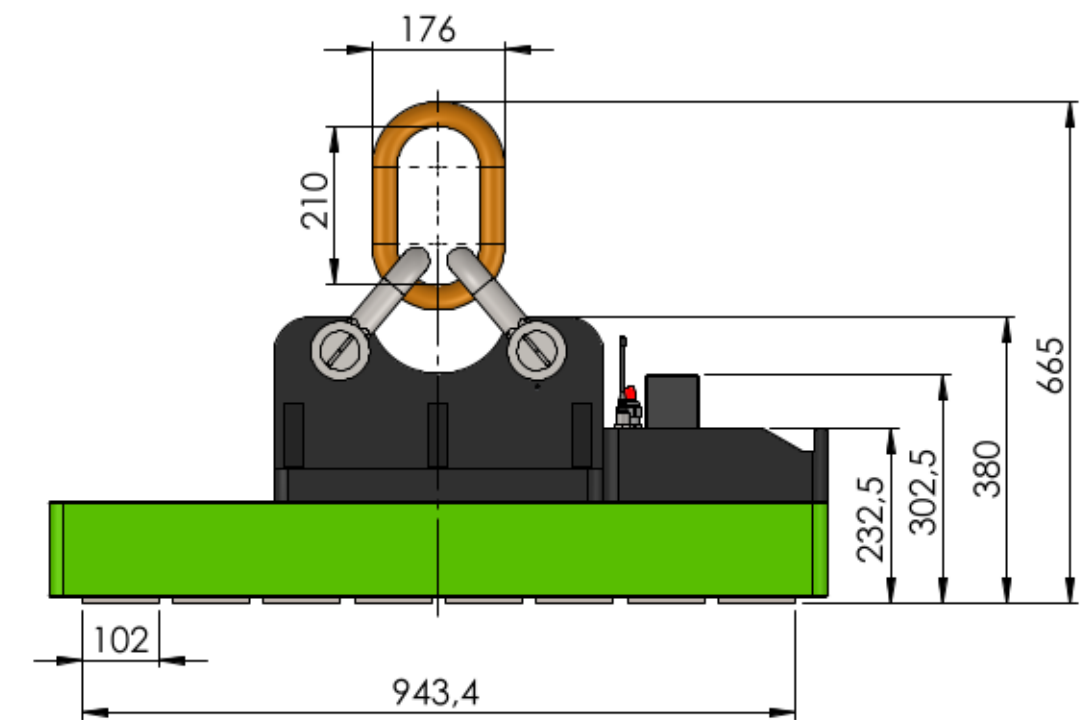
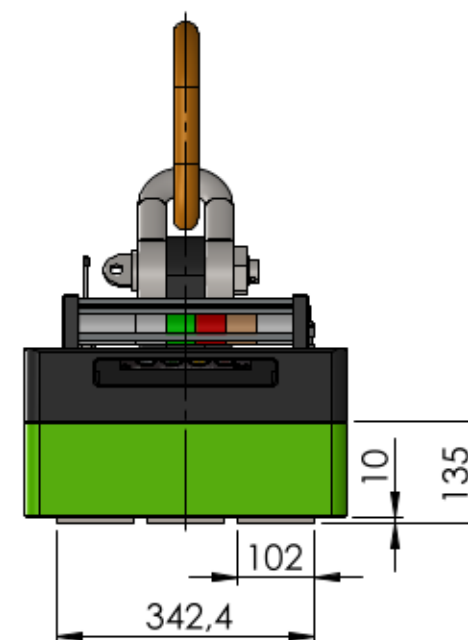
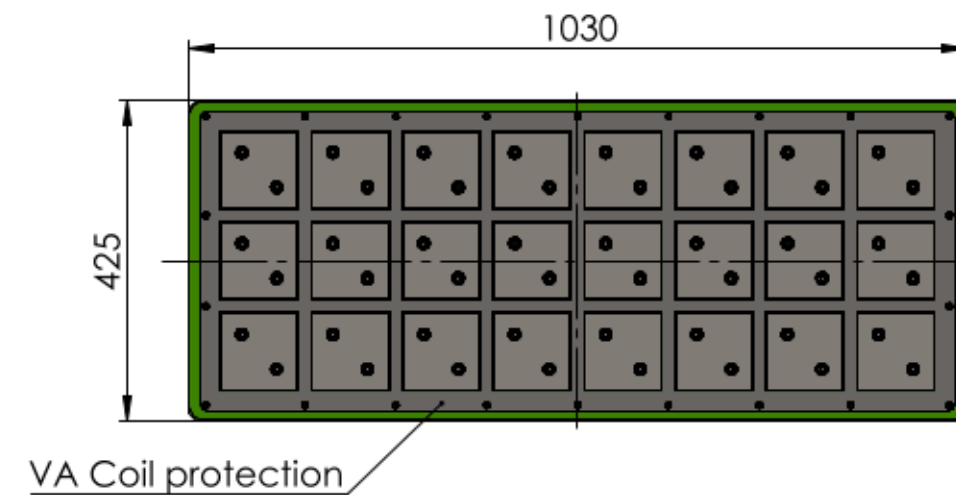
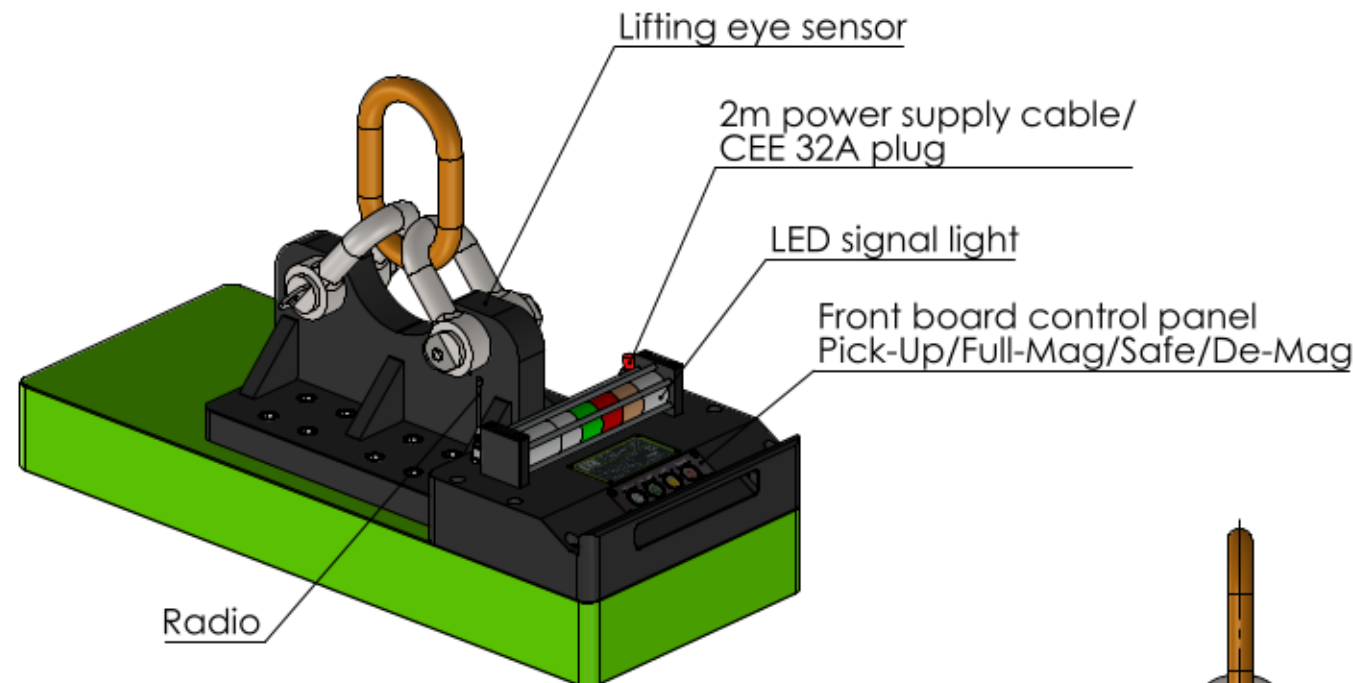


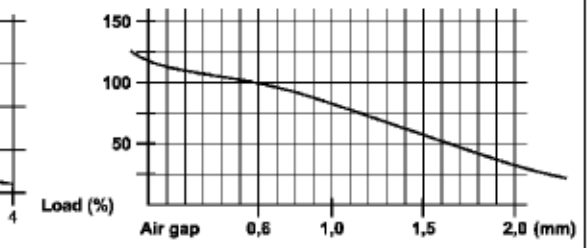


Specification FXE-HD 9600-100

Specification FXE-HD 9600-100			
Nominative Force: 348 kN		lifting capacity EN 13155/WLL	
Materialthickness >35mm (100%)		WLL= 9600kg at air gap 0,6mm	
4x 15,9 kVA			
U: 380-480V Pulse		Protection type IP 65	
R: 4x 1,7 Ω		Protection category SK I	
Max. Load capacity at sheets and 4-edge pipes			
T material thickness	Lmax (mm)	Wmax (mm)	Wll (kg)
>=10mm	3000	2000	3200
>=20mm	4000	2500	6400
>=35mm	5000	3200	9600

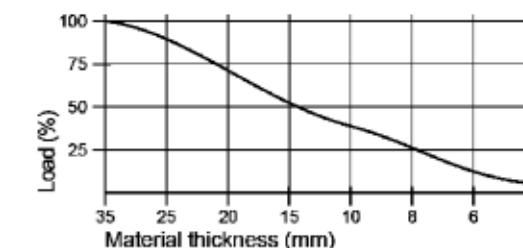

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!
All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO
7168 M

material: weight: 450.00

drawing no.: 0015515

description: FXE-HD 9600-100

part no.: 10609603-1

sheet 1 / 2

A3

scale: 1:10 Status: Freigegeben

date name
drawn 13.01.2022 BW
edit 27.06.2024
appr. 27.06.2024 TW

05 Luftspaltkurve 27.06.2024 TW
04 Neue Funke 08.12.2023 TW
03 Tabellenwerte 19.10.2023 TW
02 Überarbeitet 25.01.2023 TW
rev. change date name

VEGA TECHNIK