


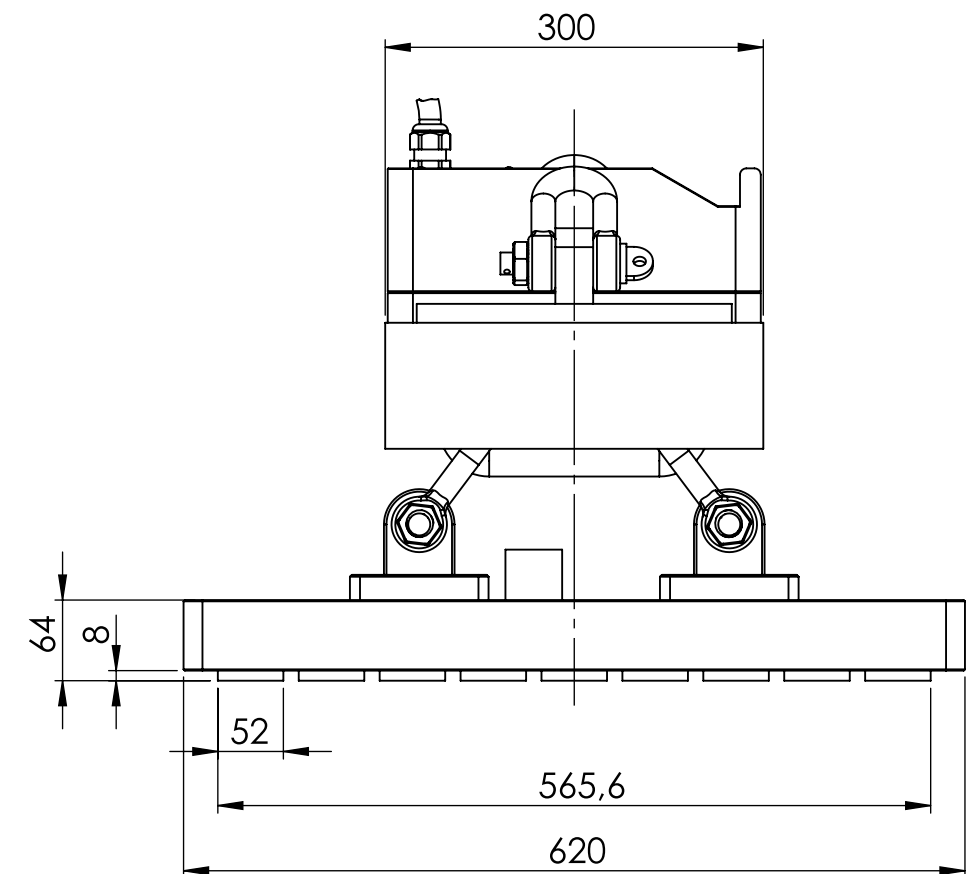
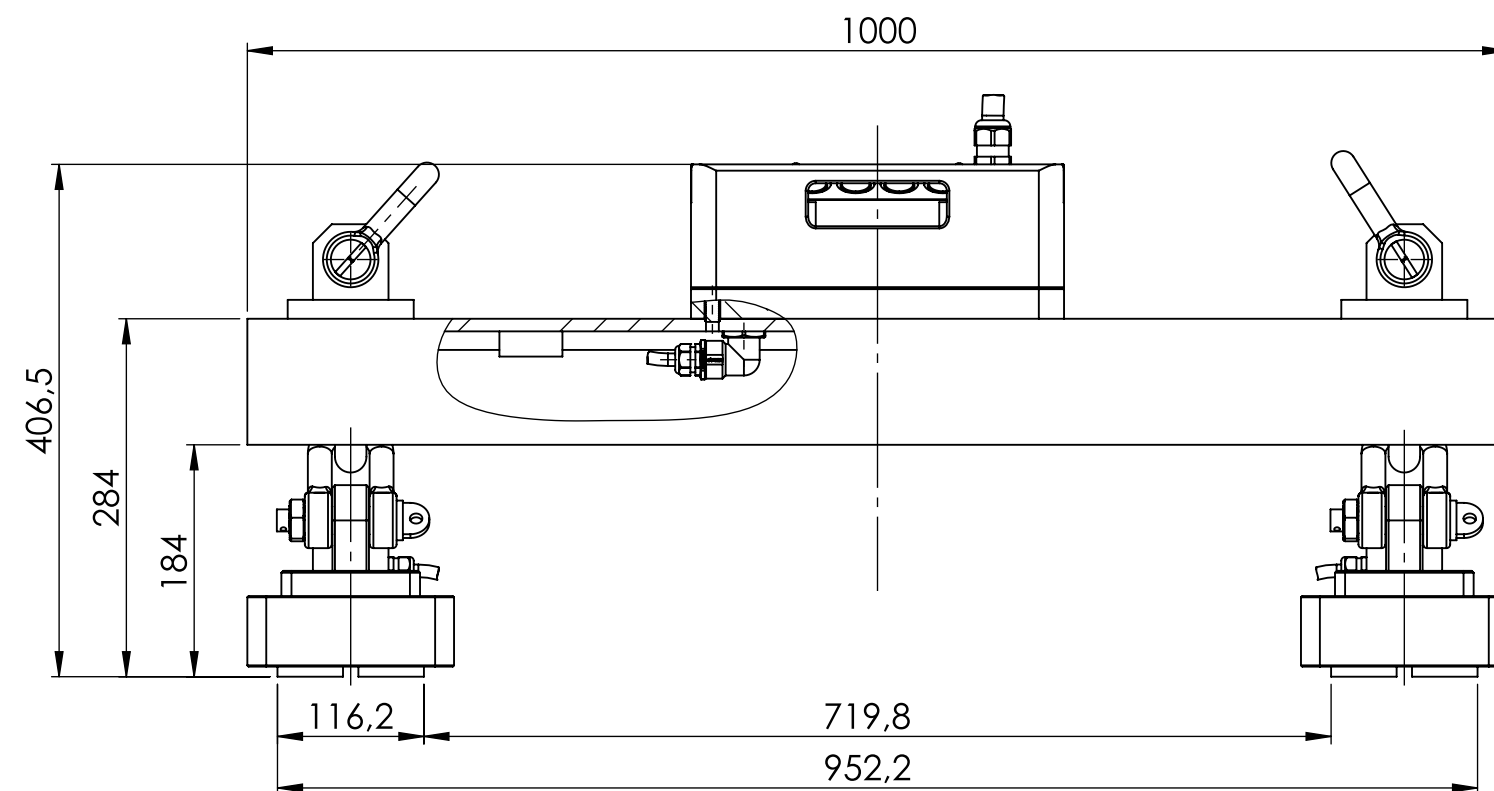
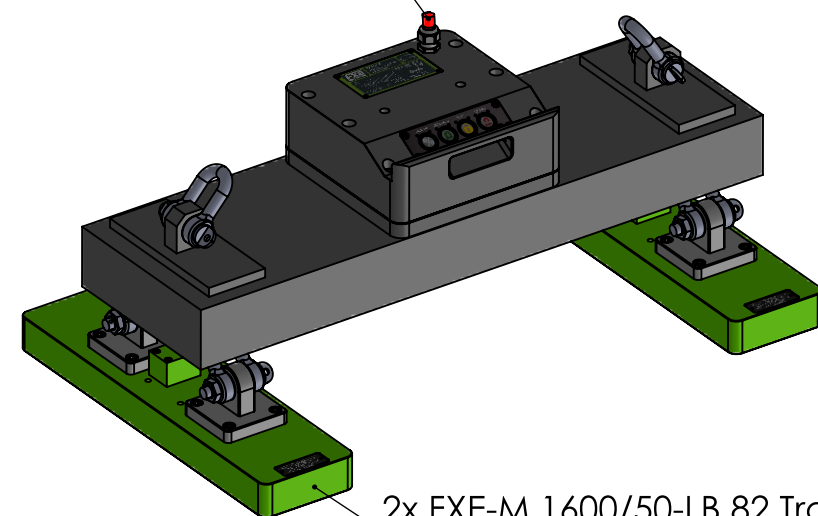


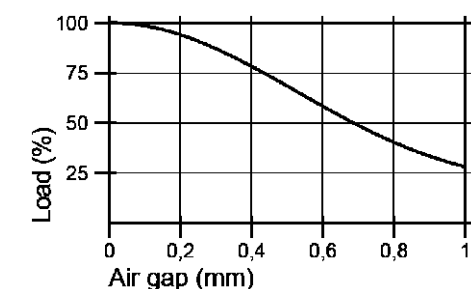

400V / L1, L2, PE / 25A

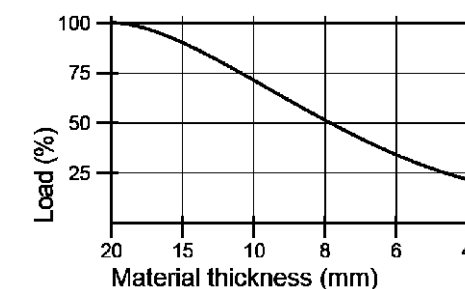


2x FXE-M 1600/50-LB 82 Traverse

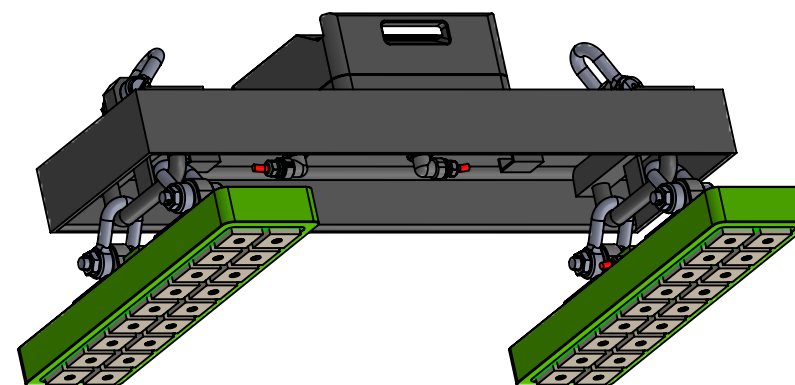

Max. load capacity on sheets according to EN13155/WLL

T material thickness	max. WLL	Max. dimensions	
		L (max.)	W (max.)
from 4 mm	500 kg	3000	1500
from 6 mm	750 kg	3000	1500
from 8 mm	1250 kg	4000	2000
from 10 mm	1750 kg	4000	2000
from 15 mm	2550 kg	4000	2500

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!
All rights reserved according to DIN ISO 16016!
Reprint with our permission only!



tolerance
ISO
7168 M

material: weight: 140.00

drawing no.: 0015908

description: **FXE-T 2500-50**
(flat traverse design)

part no.: 10682501 sheet 1 / 1
A3

scale: 1:6 Status: Freigegeben



rev. change date name