


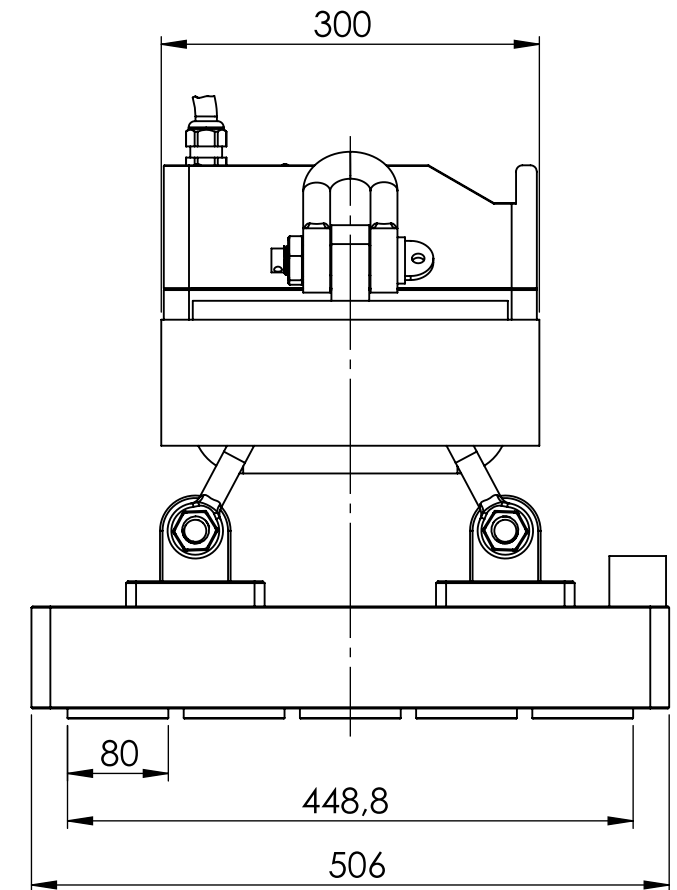
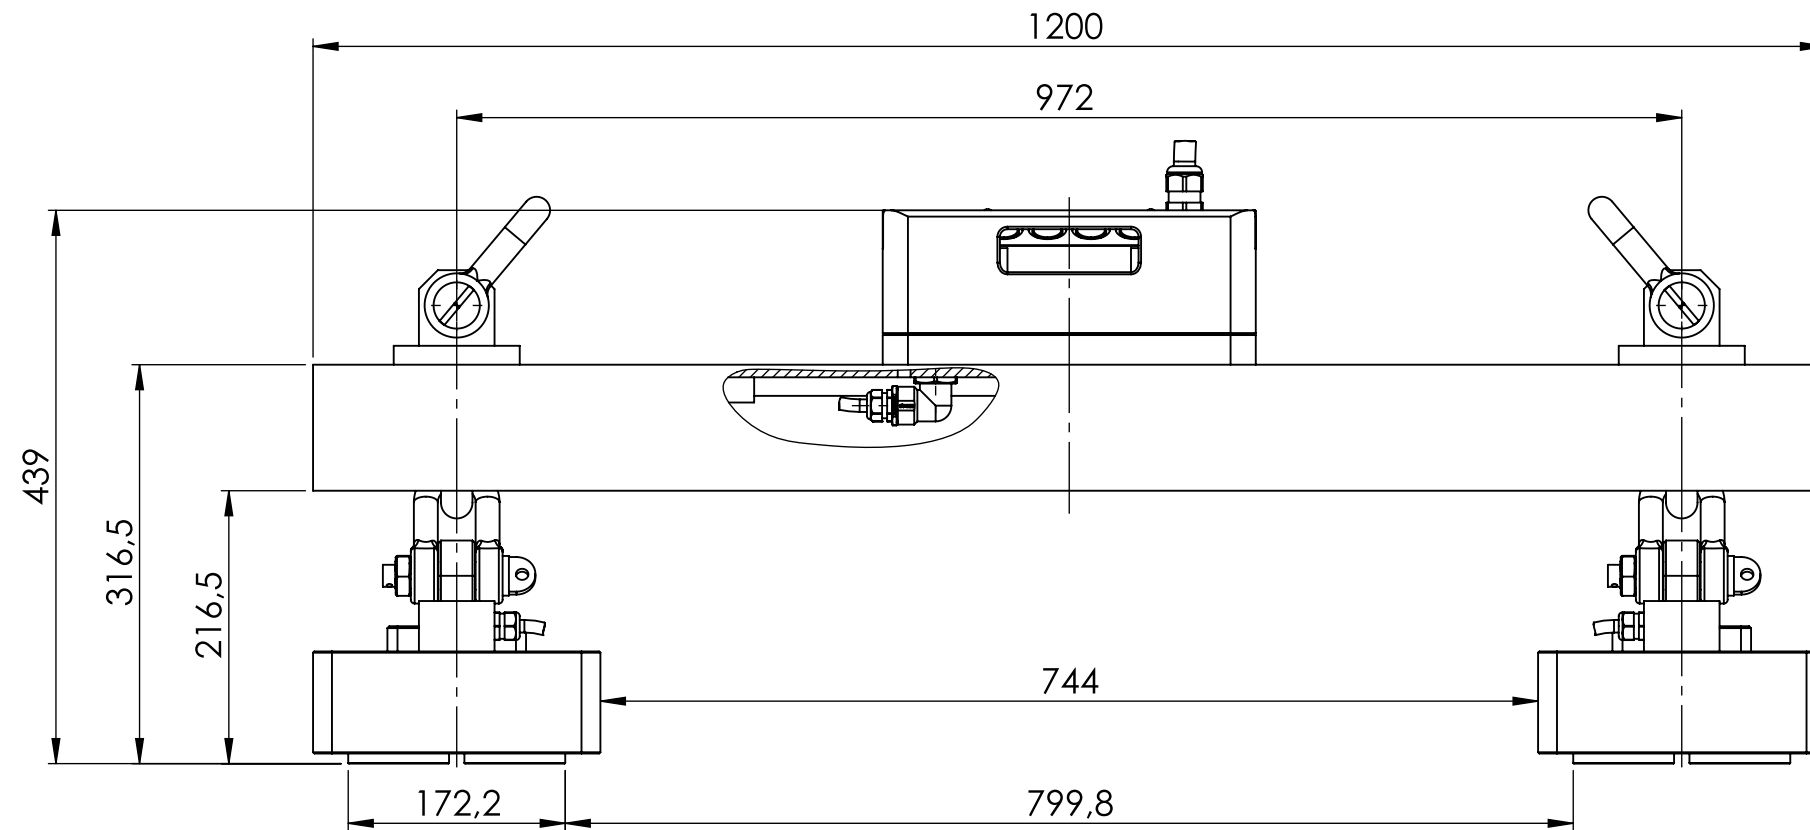
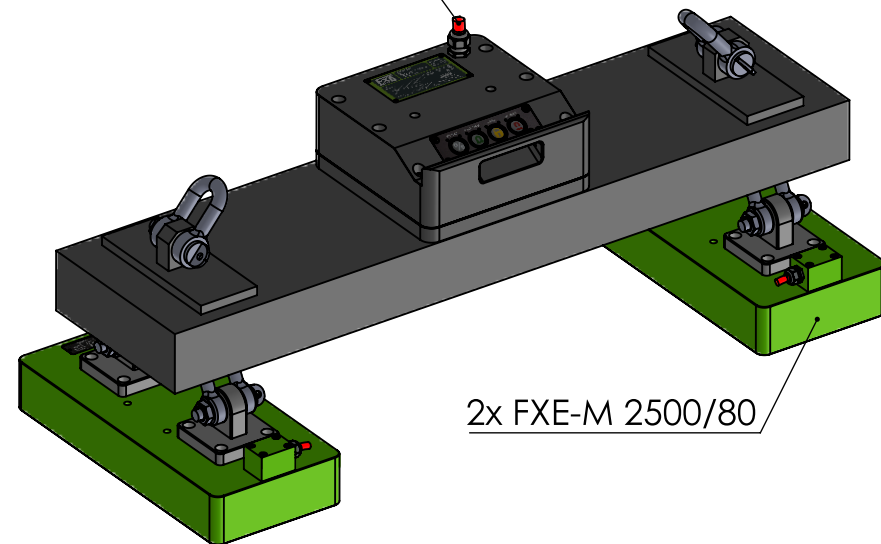


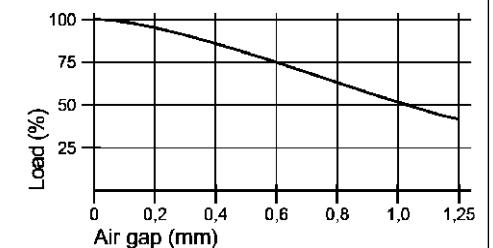

400V / L1, L2, PE / 25A

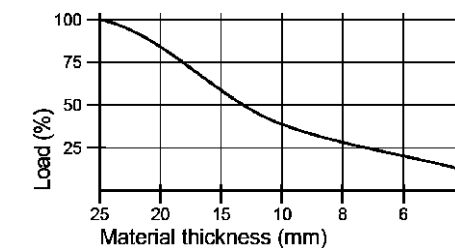

2x FXE-M 2500/80

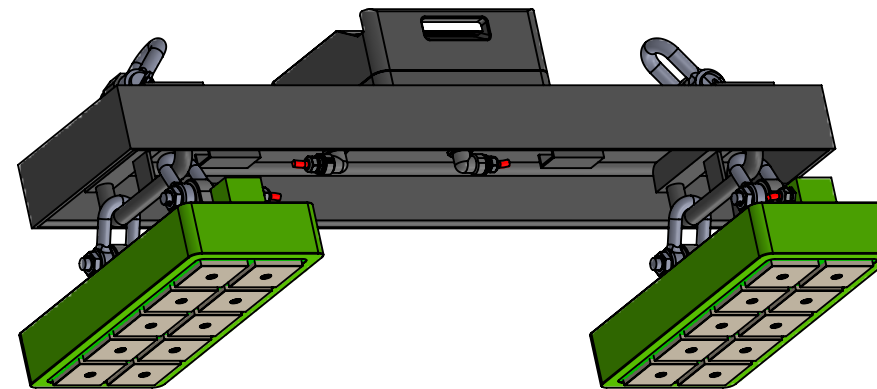

Max. load capacity on sheets according to EN13155/WLL

T material thickness	max. WLL	Max. dimensions	
		L (max.)	W (max.)
from 4 mm	350 kg	4000	1500
from 6 mm	700 kg	4000	1500
from 8 mm	1000 kg	4000	2000
from 10 mm	1250 kg	4000	2000
from 15 mm	2500 kg	5000	2500
from 25 mm	4000 kg	5000	2500

Schutzvermerk nach DIN ISO 16016 beachten!
Nachdruck nur mit unserer Genehmigung!
All rights reserved according to DIN ISO 16016!
Reprint with our permission only!

3,2
-0,05
-0,2

tolerance
ISO
7168 M

material: weight: 175kg

drawing no.: 0022733

description: **FXE-T 4000-80**

(flat traverse design)

part no.: 10684002

sheet
1 / 1
A3

scale: 1:6

Status: Freigegeben

VEGA  **TECHNIK**

rev.	change	date	name

date	name
drawn 26.10.2023	TW
edit 26.10.2023	
appr. 26.10.2023	TW