


SERIE FX

Universal Permanent Lasthebemagnet



- ✓ Hochenergie-Halbschalenmagnete.
- ✓ für flache und runde Materialien.
- ✓ 100% vernickelt.
- ✓ 3 Jahre Garantie.
- ✓ Schaltweg von nur 90°.

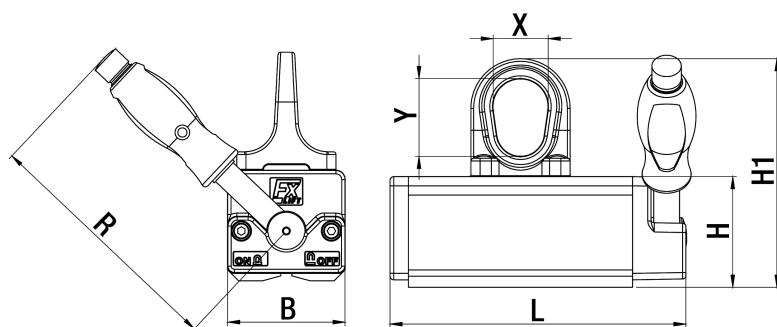

MODELL	MAX empf. Tragfähigkeit (kg)		MAX Tragfähigkeit AB (mm)	Abmessungen (mm)						GEWICHT kg
	FLACH	RUND		L	B	H	H1	R	X/Y	
FX 150	150	d. 50-200 mm 75 kg	8	161	64	60	124	136	30/42	3.6
FX 300	300	d. 50-300 mm 150 kg	15	205	87	78	158	190	42/53	8.4
FX 600	600	d. 80-400 mm 300 kg	20	288	112	94	189	228	51/62	19
FX 800	800	d. 80-400 mm 400 kg	20	348	112	94	189	228	51/62	23
FX 1000	1000	d. 100-450 mm 500 kg	25	361	152	120	240	261	60/76	42
FX 1500	1500	d. 100-450 mm 750 kg	25	485	152	120	240	261	60/76	61
FX 2000	2000	d. 120-600 mm 1000 kg	50	472	228	169	313	409	68/89	115
FX 3000	3000	d. 250-600 mm 1500 kg	50	648	228	169	313	534	68/89	166
Sicherheitsfaktor 3.5 Prüfverfahren nach EN 13155 max. Betriebstemperatur 80°C										