

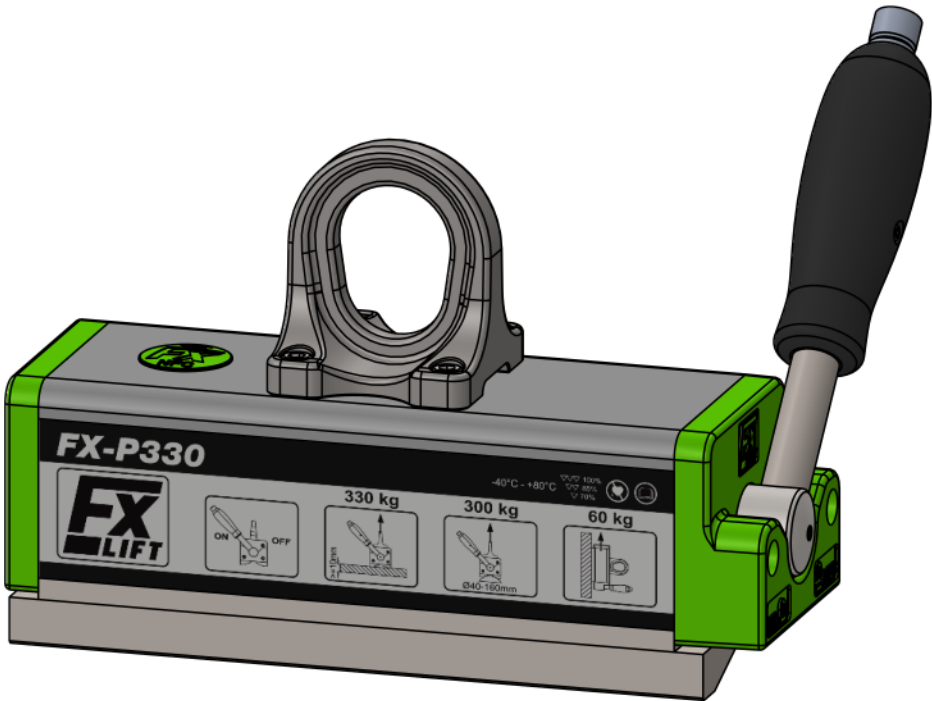
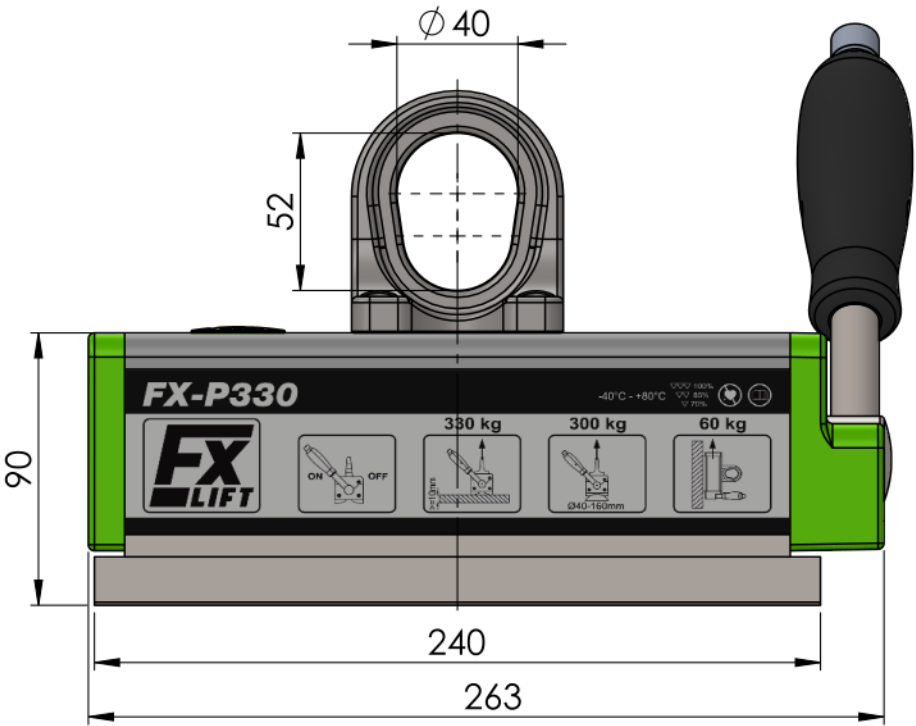


Working load according to EN 13155/WLL	
Load capacity on flat material:	330kg
Load capacity Ø40-160mm:	300kg
Max. load capacity > 10mm material thickness	

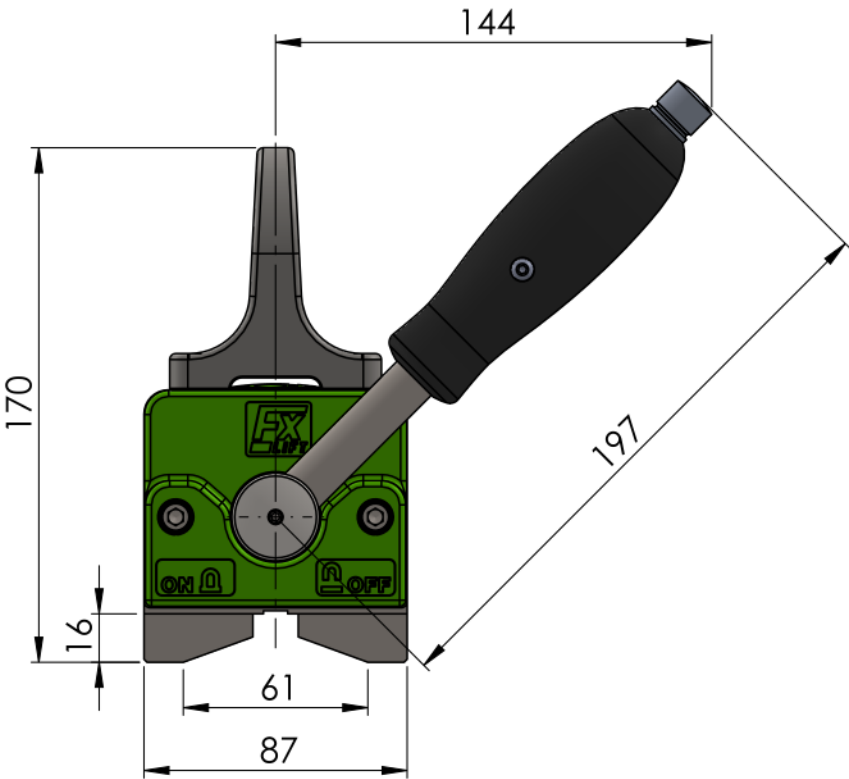

Green-Dot
NFC-Tag with magnet
related information

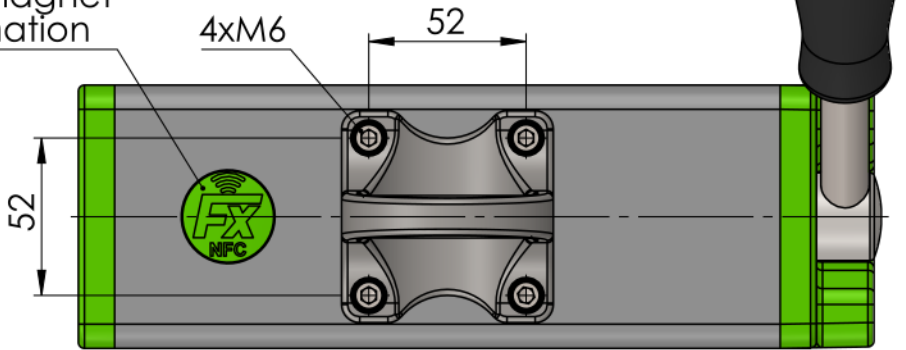

FX-P330		Air gap <0,2mm		Air gap 0,2-0,3mm			Air gap 0,3-0,6mm			Schutzvermerk nach DIN ISO 16016 beachten! Nachdruck nur mit unserer Genehmigung! All rights reserved according to DIN ISO 16016! Reprint with our permission only!				tolerance		material:	weight: 12.40
Material Thickness (mm)	Max. Load (kg)	Max. L (mm)	Max. B (mm)	Max. Load (kg)	Max. L (mm)	Max. B (mm)	Max. Load (kg)	Max. L (mm)	Max. B (mm)					ISO 7168 M		drawing no.;	
>=4	100	2000	1250	80	1500	1250	60	1250	1250					date	name	description: FX-P330	
>=6	160	2500	1500	130	2000	1500	100	1500	1500					drawn	TW		
>=8	300	2500	1500	240	2000	1500	180	1500	1500					appr.	TW		
>=10	330	2500	1500	270	2000	1500	200	1500	1500							part no.:	sheet
Ø40-160	300	3500	-	250	3000	-	180	2500	-							11010332	1 / 1
																scale: 1:2.5	Status: Freigegeben

