

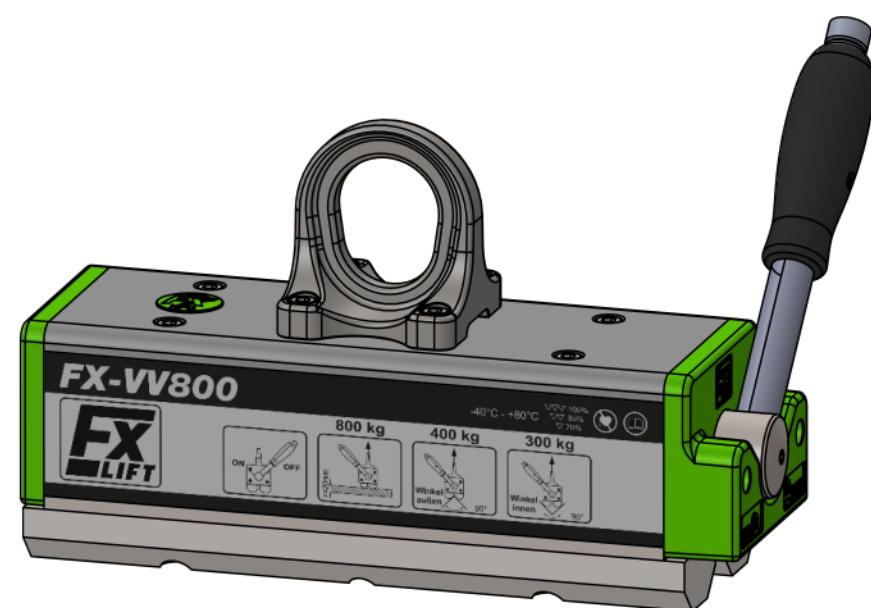
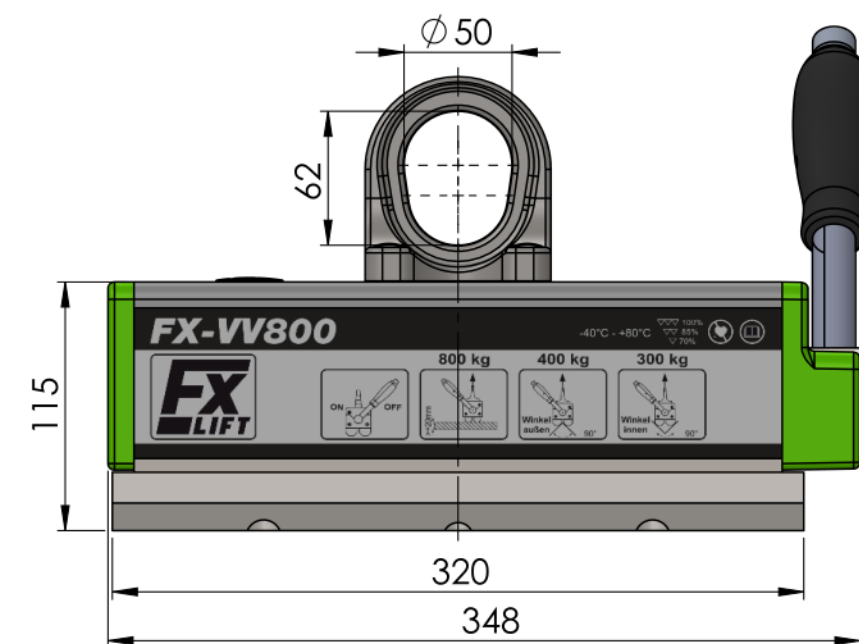
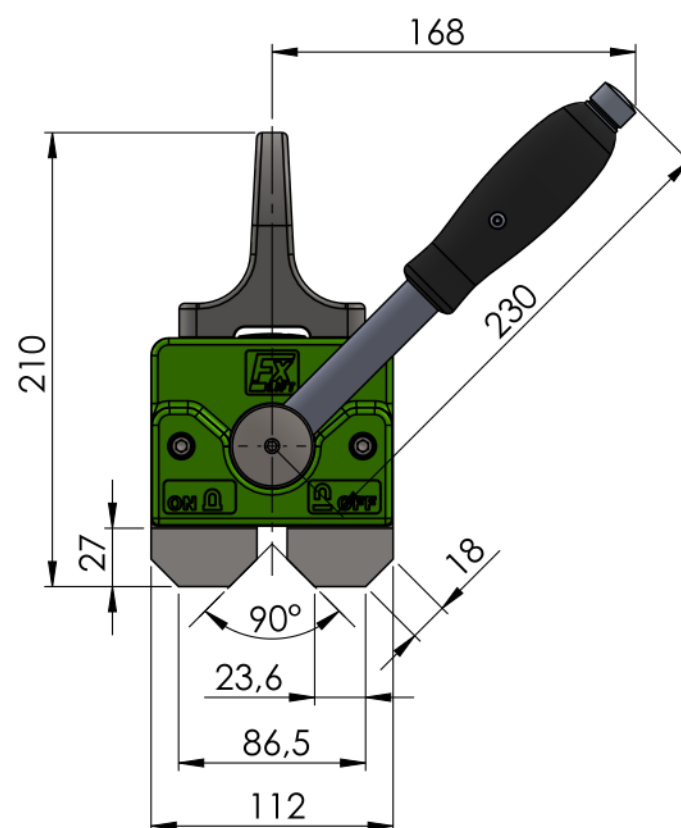


Working Load according to EN 13155/WLL

Load capacity on flat material:	800kg
Load capacity 90° profile inside/below:	300kg
Load capacity 90° profile outside/top:	400kg
Max. load capacity > 20mm material thickness	

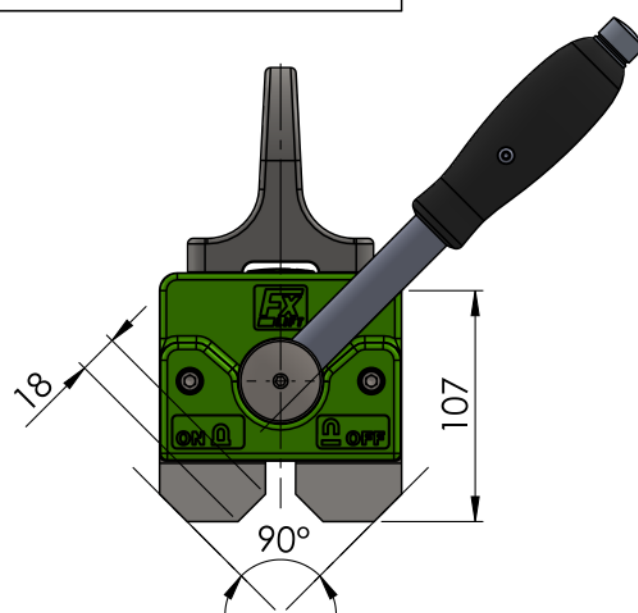

Green-Dot
NFC-Tag with magnet
related information

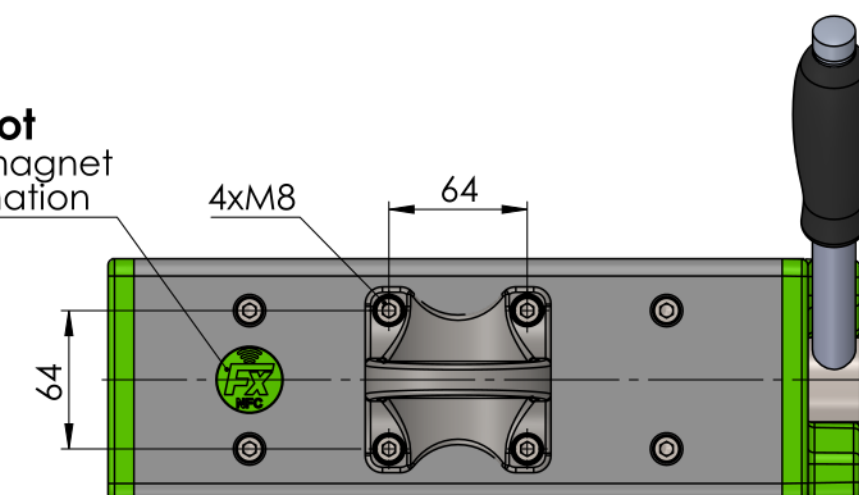

FX-VV800	Air gap <0,2mm			Air gap 0,2-0,3mm			Air gap 0,3-0,6mm		
Material Thickness (mm)	Max. Load (kg)	Max. L (mm)	Max. B (mm)	Max. Load (kg)	Max. L (mm)	Max. B (mm)	Max. Load (kg)	Max. L (mm)	Max. B (mm)
>=4	130	2000	1500	100	2000	1500	90	2000	1500
>=6	200	2500	1500	160	2250	1500	130	2250	1500
>=8	400	3000	1500	320	3000	1500	270	2500	1500
>=15	650	3000	1500	520	3000	1500	420	2500	1500
>=20	800	3000	1500	650	3000	1500	550	2500	1500
90° inside	300	5000	-	240	4500	-	200	4000	-
90° outside	400	5000	-	320	4500	-	300	4000	-

Schutzvermerk nach DIN ISO 16016 beachten! Nachdruck nur mit unserer Genehmigung!				tolerance		material:	weight: 27.70
All rights reserved according to DIN ISO 16016! Reprint with our permission only!				ISO 7168 M		drawing no.: 0016090	
				name		description: FX-VV800	
				date		part no.: 11010804	
				name		sheet 1 / 1	
				date		A3	
				name		scale: 1:3.5	
				date		Status: Freigegeben	
				name			

VEGA  **TECHNIK**